

Micro-D Accessories

Metal Protective Covers 500-017 & 500-037



Choose **Metal Protective Covers** for full environmental protection.

Silicone Rubber gasket provides a watertight seal.


Use with **M83513 Type Metal Shell Micro-D Connectors**

MATERIALS & FINISHES

Shell	Aluminum Alloy 6061 -T6
Gasket	Silicone Rubber
Hardware	300 Series Stainless Steel, Passivated


SELECT A PROTECTIVE COVER STYLE

Style 1




Use With Micro-D Connectors With Jackposts
Not for rear panel mounted connectors.

Style 2

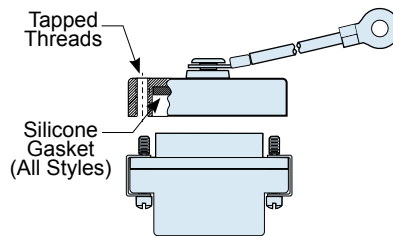

Use With Micro-D Connectors With Jackscrews

Style 3

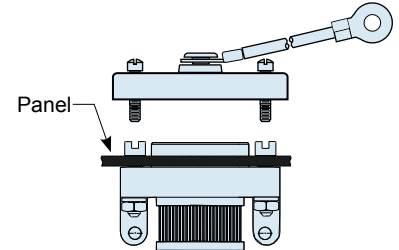

Use With Rear-Panel Mounted Micro-D Connectors


HOW TO ORDER STYLE 1 AND STYLE 2 PROTECTIVE COVERS

Series	Shell Finish	Connector Size	Hardware Option	Lanyard Option	Lanyard Length	Ring Terminal Ordering Code	
500-017	C – Black Anodize	09	STYLE 1  Fits Micro-D's With Jackposts Cover has Jackscrews	N – No Lanyard G – Flexible Nylon Rope F – Wire Rope, Nylon Jacket H – Wire Rope, Hi-Temp Teflon Jacket	Length in One Inch Increments Example: "6" equals six inches.	06 – .125 (3.2)	
	E – Chem Film	15				01 – .140 (3.6)	
	J – Cadmium, Yellow Chromate	21				05 – .167 (4.2)	
	M – Electroless Nickel	25				04 – .197 (5.0)	
	NF – Cadmium, Olive Drab	31					
	Z2 – Gold	37	MB – Fillister Head Jackscrew MH – Hex Head Jackscrew				I.D. of Ring Terminal
		51	STYLE 2  Fits Micro-D's With Jackscrews Cover has Tapped Female Threads F – Female Threads				
		51-2					
		67					
		69					
		100					
(STYLE 3: see next page)							
Sample Part Number							
500-017	M	25	MB	F	4	– 06	

Micro-D Accessories

Metal Protective Covers 500-017 & 500-037

HOW TO ORDER STYLE 3 PROTECTIVE COVERS FOR REAR MOUNT CONNECTORS


Series	Shell Finish	Connector Size	Panel Thickness Option	Hardware Option	Lanyard Option	Ring Terminal Ordering Code
500-037	C – Black Anodize	09	R1 – .031 (0.79) Panel	STYLE 3  Fits Micro-D's With Jackposts B – Fillister Head Jackscrew H – Hex Head Jackscrew	N – No Lanyard G – Flexible Nylon Rope F – Wire Rope, Nylon Jacket H – Wire Rope, Hi-Temp Teflon Jacket	06 – .125 (3.2)
		15	R2 – .047 (1.19) Panel			01 – .140 (3.6)
	E – Chem Film	21	R3 – .062 (1.57) Panel			05 – .167 (4.2)
	J – Cadmium, Yellow Chromate	25	R4 – .093 (2.36) Panel			04 – .197 (5.0)
		31				I.D. of Ring Terminal
		37				
	M – Electroless Nickel	51				
		51-2				
	NF – Cadmium, Olive Drab	67				
		69				
	Z2 – Gold	100				

Sample Part Number

500-037	J	31	R4	B	G	– 06
---------	---	----	----	---	---	------

PROTECTIVE COVER DIMENSIONS


Style 1

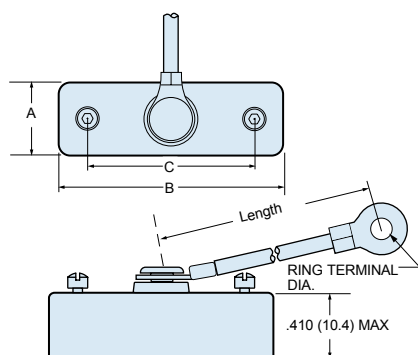

#2-56 UNC THREADS SIZES 9-69
#4-40 UNC THREADS SIZE 100

For Micro-D Connectors With Jackposts


Style 2

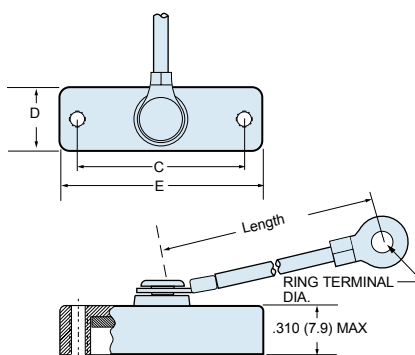

#2-56 UNC THREADS SIZES 9-69
#4-40 UNC THREADS SIZE 100

For Micro-D Connectors With Jackscrews

Style 3

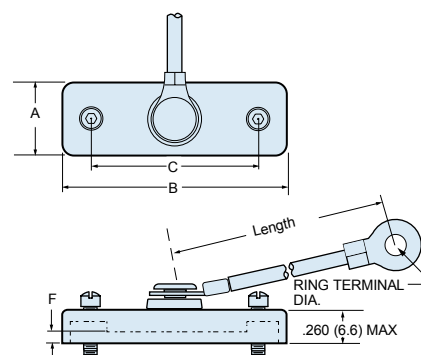

#2-56 UNC THREADS SIZES 9-69
#4-40 UNC THREADS SIZE 100

For Rear-Panel Mounted Micro-D

Size	A Max.		B Max.		C		D Max.		E Max.		F		
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	Panel Thickness	In.	mm.
9	.453	11.5	.930	23.6	.565	14.35	.380	9.65	.795	20.19	R1	.126	3.2
15	.453	11.5	1.080	27.4	.715	18.16	.380	9.65	.945	24.00	R2	.110	2.8
21	.453	11.5	1.230	31.2	.865	21.97	.380	9.65	1.095	27.81	R3	.095	2.4
25	.453	11.5	1.330	33.8	.965	24.51	.380	9.65	1.195	30.35	R4	.064	1.6
31	.453	11.5	1.480	37.6	1.115	28.32	.380	9.65	1.345	34.16			
37	.453	11.5	1.630	41.4	1.265	32.13	.380	9.65	1.495	37.97			
51	.496	12.6	1.580	40.1	1.215	30.86	.420	10.67	1.445	36.70			
51-2	.453	11.5	1.980	50.3	1.615	41.02	.380	9.65	1.845	46.86			
67	.453	11.5	2.380	60.5	2.015	51.18	.380	9.65	2.245	57.02			
69	.496	12.6	1.880	47.8	1.515	38.48	.420	10.67	1.745	44.32			
100	.539	13.7	2.315	58.8	1.800	45.72	.470	11.94	2.180	55.37			