
This document was generated on 06/02/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 5013290222
Status: Active
Overview: inertia_lock_330mm_wiretowire_system
Description: 3.30mm (.130") Pitch Wire-to-Wire Inertia Lock Plug Housing, Single Row, 2 Circuits, Red

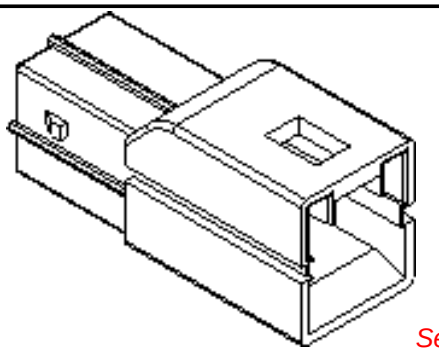

Series image - Reference only

Documents:
Drawing (PDF)
RoHS Certificate of Compliance (PDF)
Product Specification PS-501328-001 (PDF)

General

Product Family	Crimp Housings
Series	501329
Overview	inertia_lock_330mm_wiretowire_system
Product Name	Inertia Lock

Physical

Circuits (maximum)	2
Color - Resin	Red
Gender	Male
Glow-Wire Compliant	No
Lock to Mating Part	Yes
Material - Resin	Nylon
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.130 In
Pitch - Mating Interface (mm)	3.30 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-25°C to +80°C

Electrical

Current - Maximum per Contact	4A

Material Info

Reference - Drawing Numbers

Packaging Specification	SPK-501329-001
Product Specification	PS-501328-001, RPS-501328-001, RPS-501328-002, RPS-501328-003
Sales Drawing	SD-501329-001

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Not Reviewed
Halogen-Free Status
Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.


Search Parts in this Series
501329Series


Mates With
501328-0222 Receptacle Housing . 501395 Receptacle Terminalfor AWG#18-20 . 500989 Receptacle Terminal for AWG#22-26


Use With
51348-0213 Retainer . 56265 Plug Terminal for AWG#18- 20 . 56279 Plug Terminal for AWG#22-26

This document was generated on 06/02/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



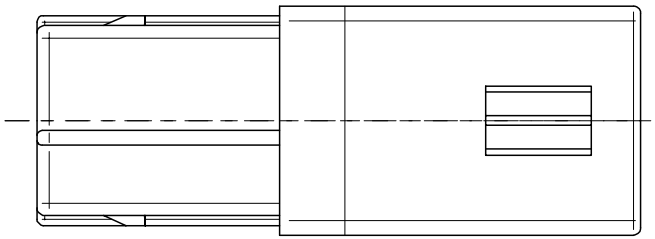

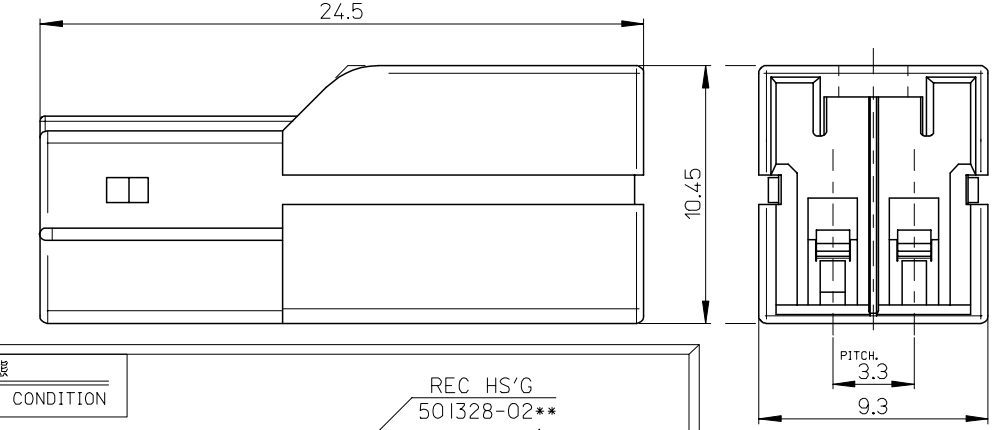


注記
NOTES.

1. 適合リテーナ　：51348-0213
APPLICABLE RETAINER
詳細は SD-51348-001　を参照下さい。
REFERENCE:SD-51348-001

2. 材料　：NYLON66,UL94V-0
MATERIAL


本形状は 501329-0200 を示す。
SHAPE OF 501329-0200

ターミナル装着・嵌合状態
TERMINAL ASSEMBLY & MATING CONDITION

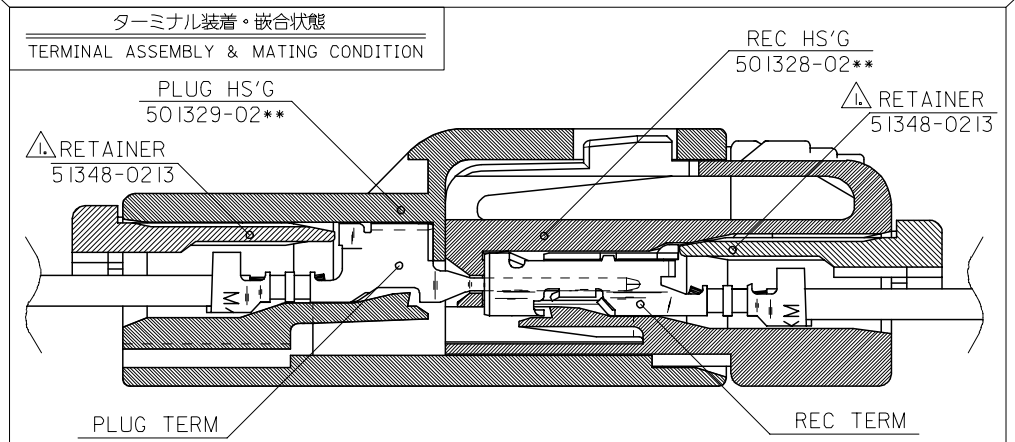


嵌合キー違い品
KEYING TYPE.

501328-0214
COLOR:BLUE



501328-0222
COLOR:RED



COLOR	MATERIAL No.	MODEL No.
BLUE	501329-0214	501329-02**
RED	501329-0222	
WHITE	501329-0200	

RELEASED
EC NO: J2005-2177
DRWN:TODA 2005/03/31
CHKD:K.ASAKAWA 2005/03/31
APPR:S.ICHIKAWA 2005/03/31
DESCRIPTION
A
REV

GENERAL TOLERANCES
(UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3 °	

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 5:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: T.ODA DATE: '04/09/30
CHECKED BY: K.ASAKAWA DATE: '04/09/30
APPROVED BY: S.ICHIKAWA DATE: '04/09/30

TITLE
3.3 W/W INERTIA LOCK
CONN PLUG 2CKT

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-501329-001
SHEET NO.: 1 OF 1

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION