
CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

5325F Series Super Brite T-1 LED Assembly

DESCRIPTION AND FEATURES

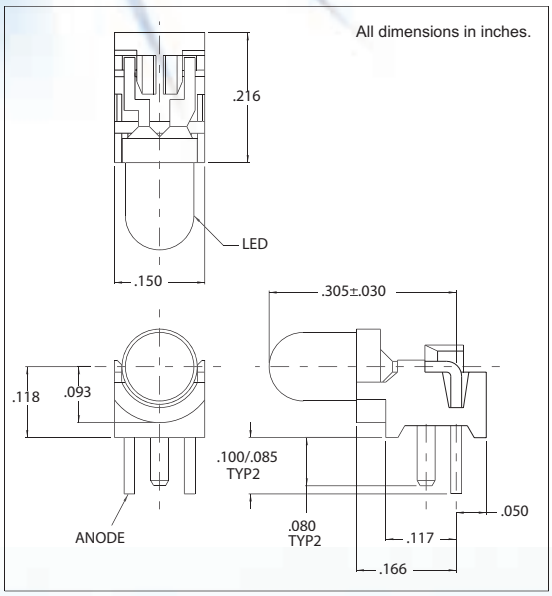

Features

World's smallest T-1 Right Angle LED Assembly
- Permits installation in tight spaces.
- Compatible with PCMCIA type III and IV cards.
- Leightweight

Precise Alignment
- Press-in mounting pin for perfect location.
- Side-stackable on .150" centers.

Solid State Reliability
- 100K+ hour MTBF
- UL94V-O rated housing

Alternate LEDs are also available in this package as standard variations.

Mounting hole pattern on page 1-X7.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

Part Number	Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage Typ. (V)	Forward Voltage Max. (V)	Reverse Break-down Voltage Min. (V)	Peak Wavelength (nm)
5325F1	Red	10.0	10	25	2.2	3.0	5	635
5325F3	Amber	4.0	10	30	2.2	3.0	5	603
5325F5	Green	8.5	10	25	2.3	3.0	5	565
5325F7	Yellow	10.0	10	20	2.2	3.0	5	583

CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

America:
CML Innovative Technologies,Inc.
147 Central Avenue
Hackensack -NJ 07601 -USA
Tel:1-201-489 -8989
Fax:1-201-489 -6911
e-mail:americas@cml-it.com

Europe:
CML Technologies GmbH &Co.KG
Robert-Bunsen-Str.1
67098 Bad Dürkheim -GERMANY
Tel:+49 (0)6322 9567-0
Fax:+49 (0)6322 9567-88
e-mail:europe@cml-it.com

Asia:
CML Innovative Technologies,Inc.
61 Aida Street
Singapore 459975
Tel:(65)9630 -5003
e-mail:asia@cml-it.com

CML-IT reserves the right to make specification revisions that enhance the design and/or performance of the product