



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C2	REVISED PER ECO-15-004915	10APR2015	AP	DD

D

C

B


A

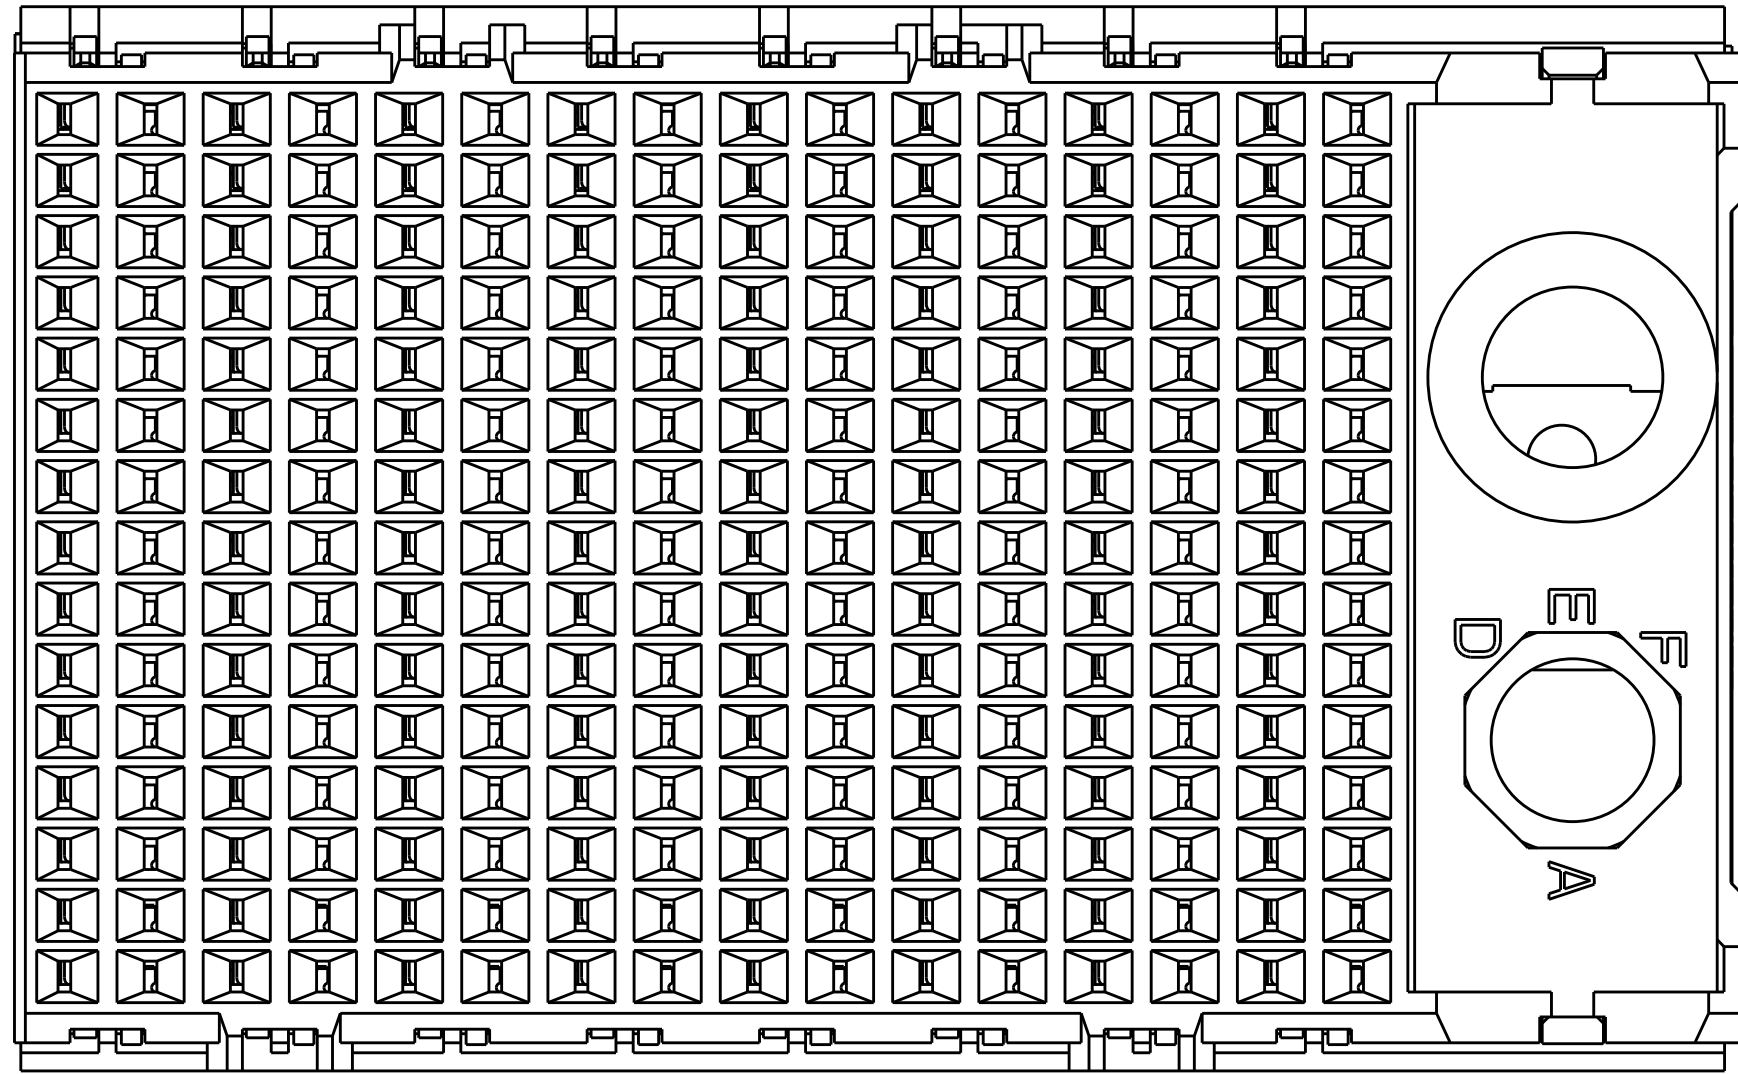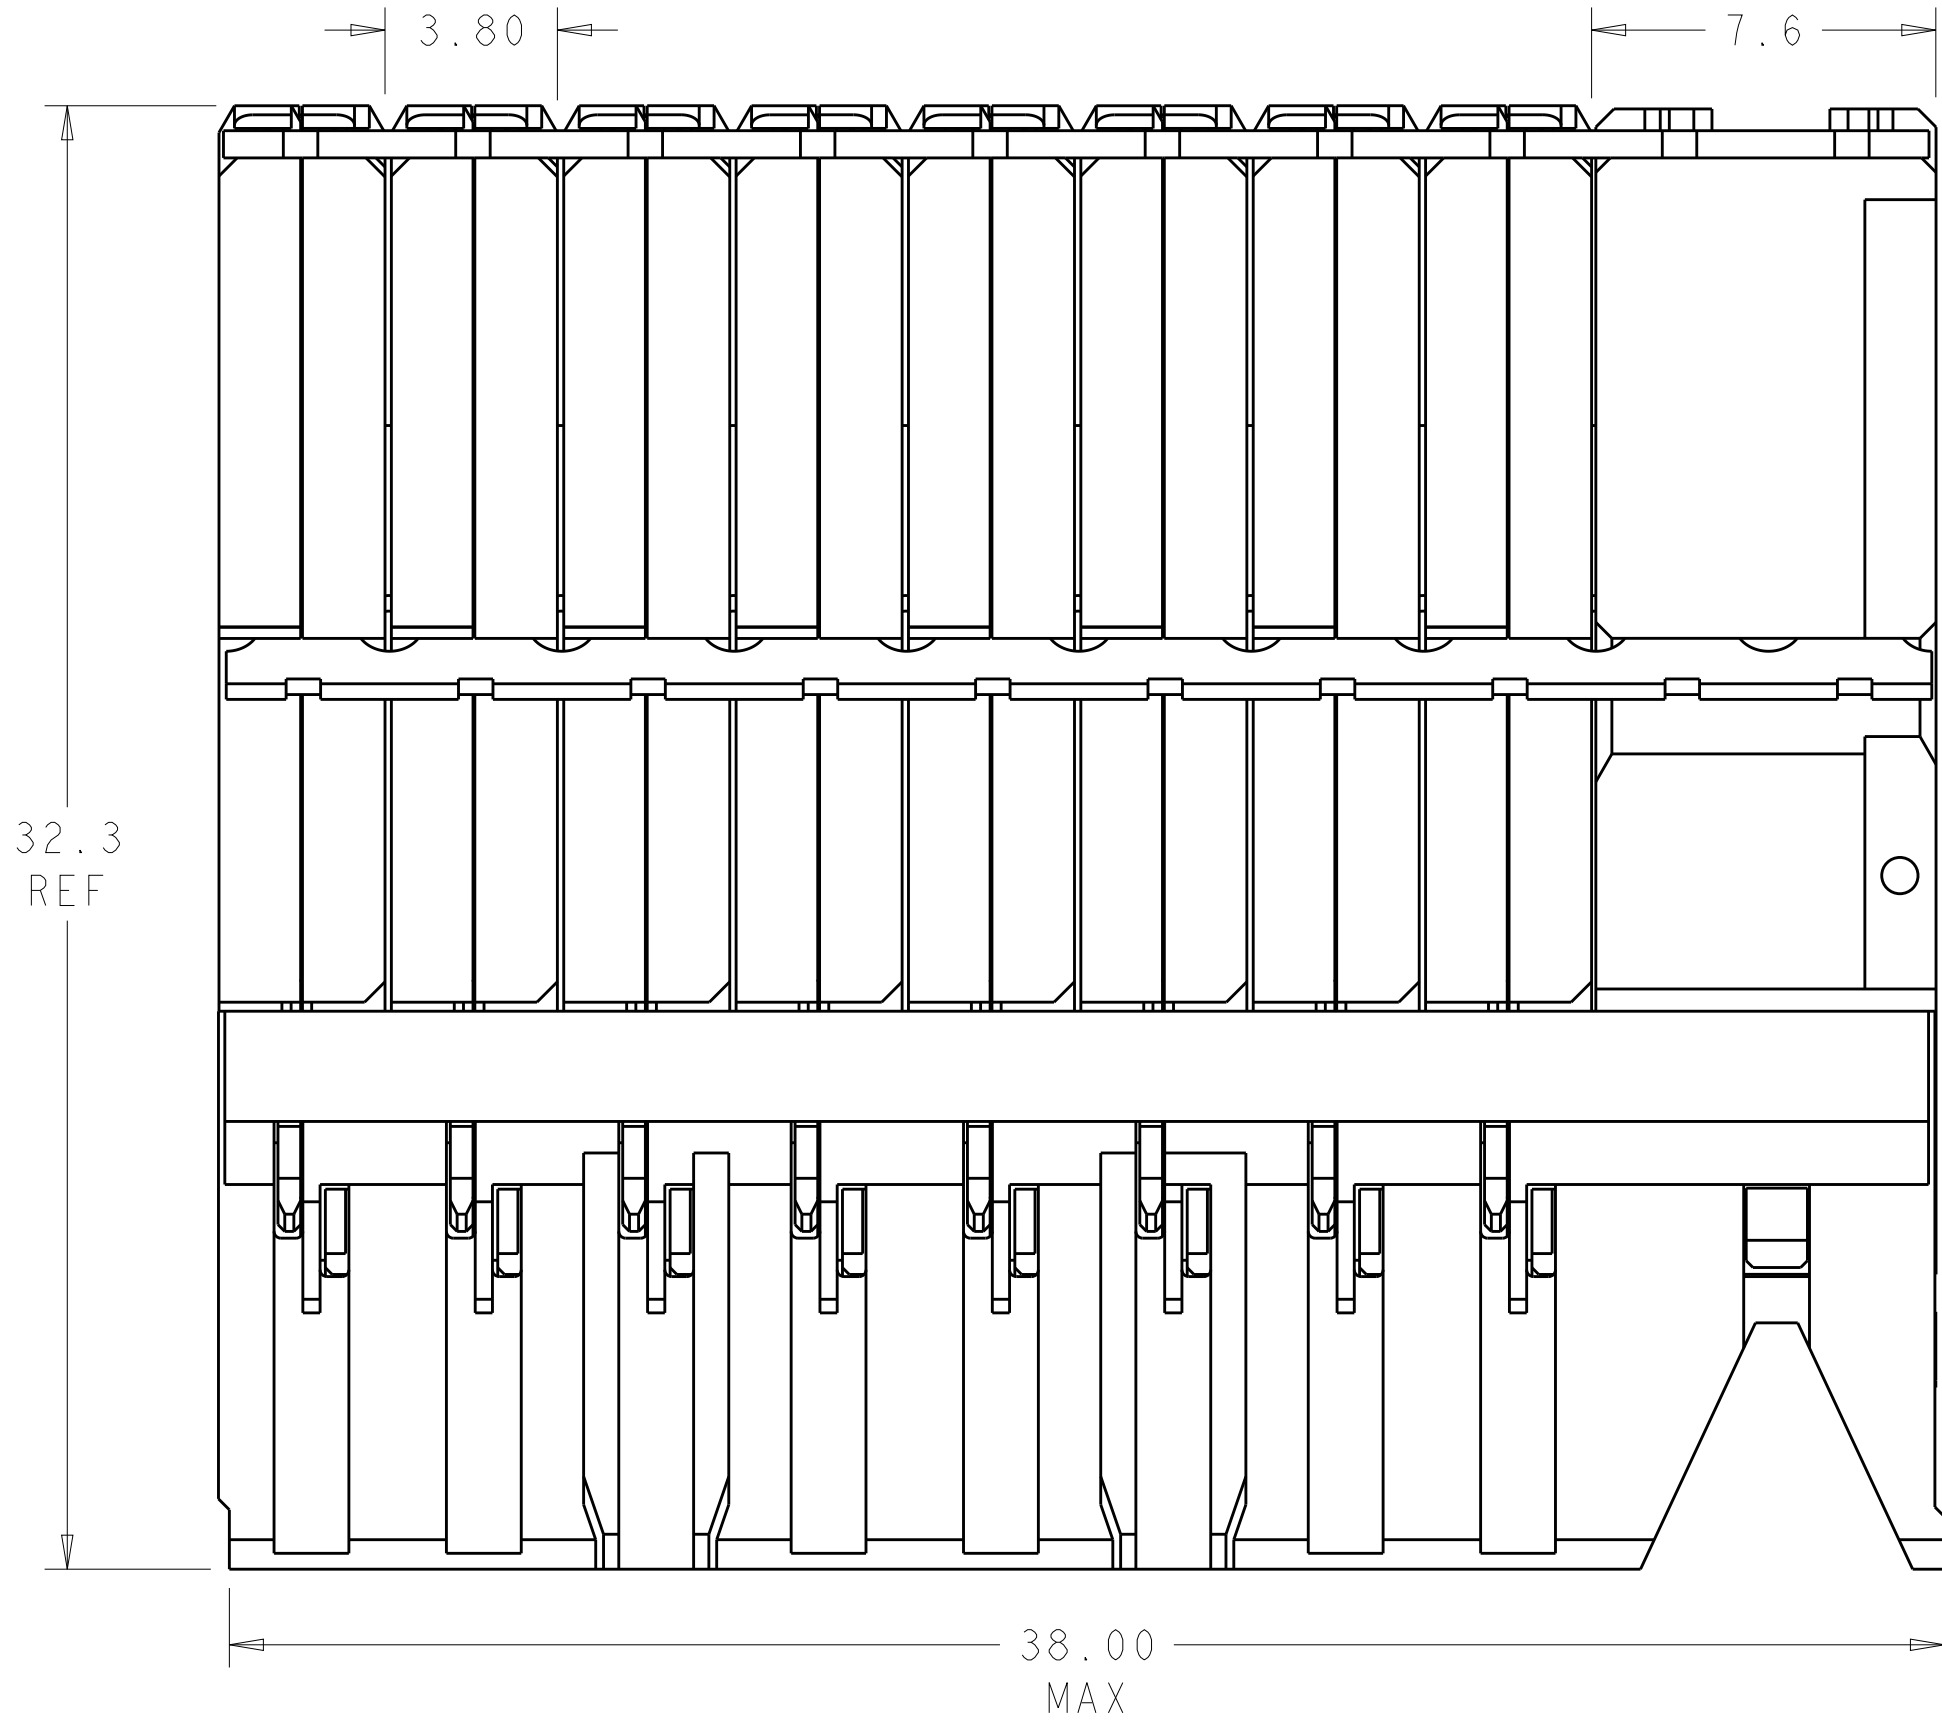


KEY POSITION CHART			
	NONE		
	A		E
	B		F
	C		G
	D		H

240X $\varnothing 0.39 \pm 0.05$
PLATED THRU HOLE

240X $\varnothing 0.48 \pm 0.013$
DRILL HOLE
 $\varnothing 0.10$

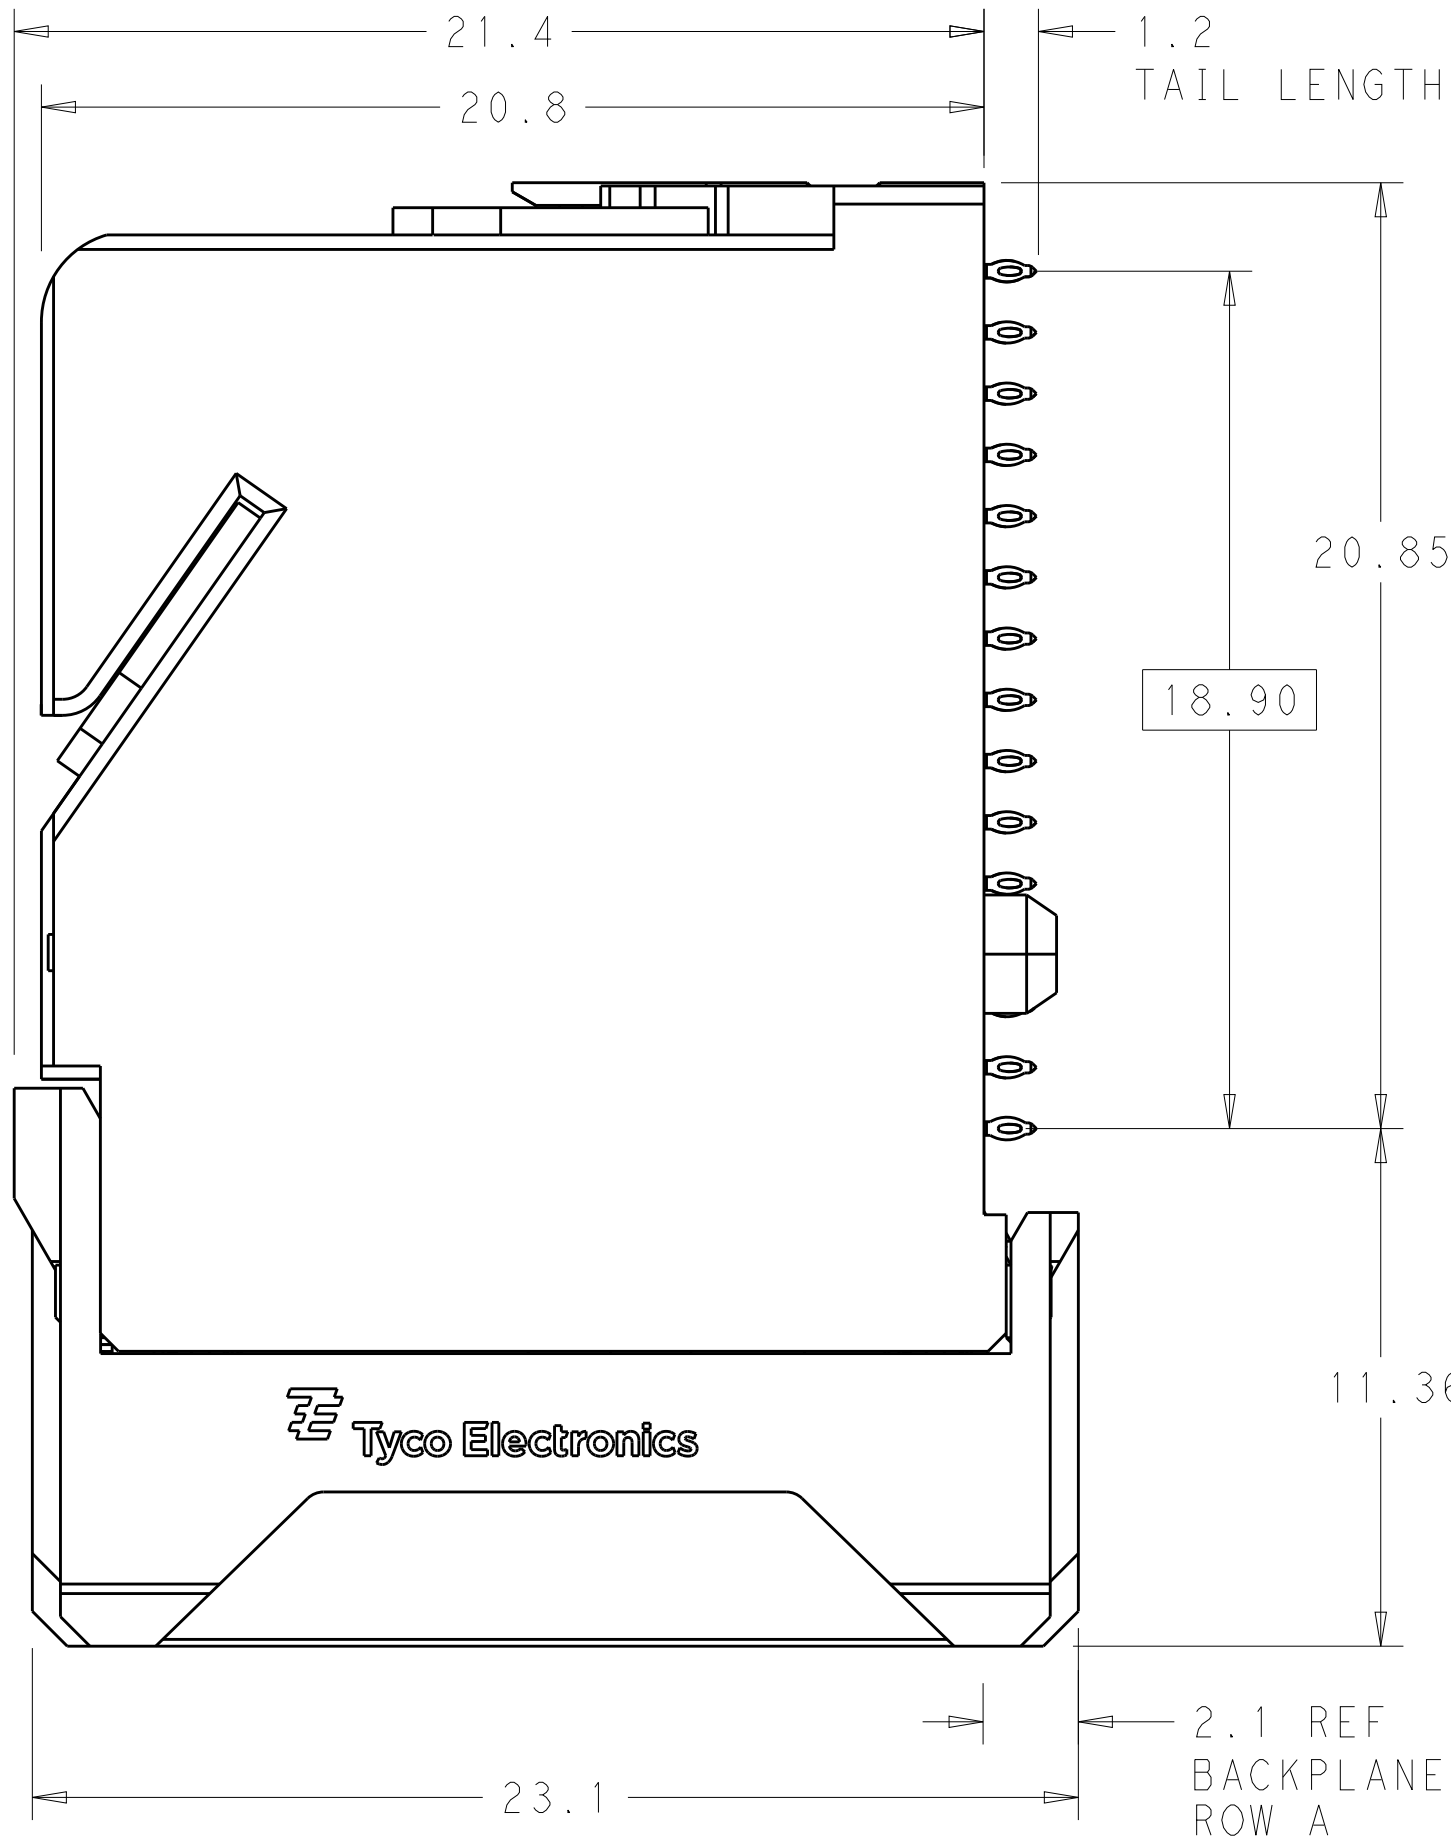


- 1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:
30 μ " SELECTIVE GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.

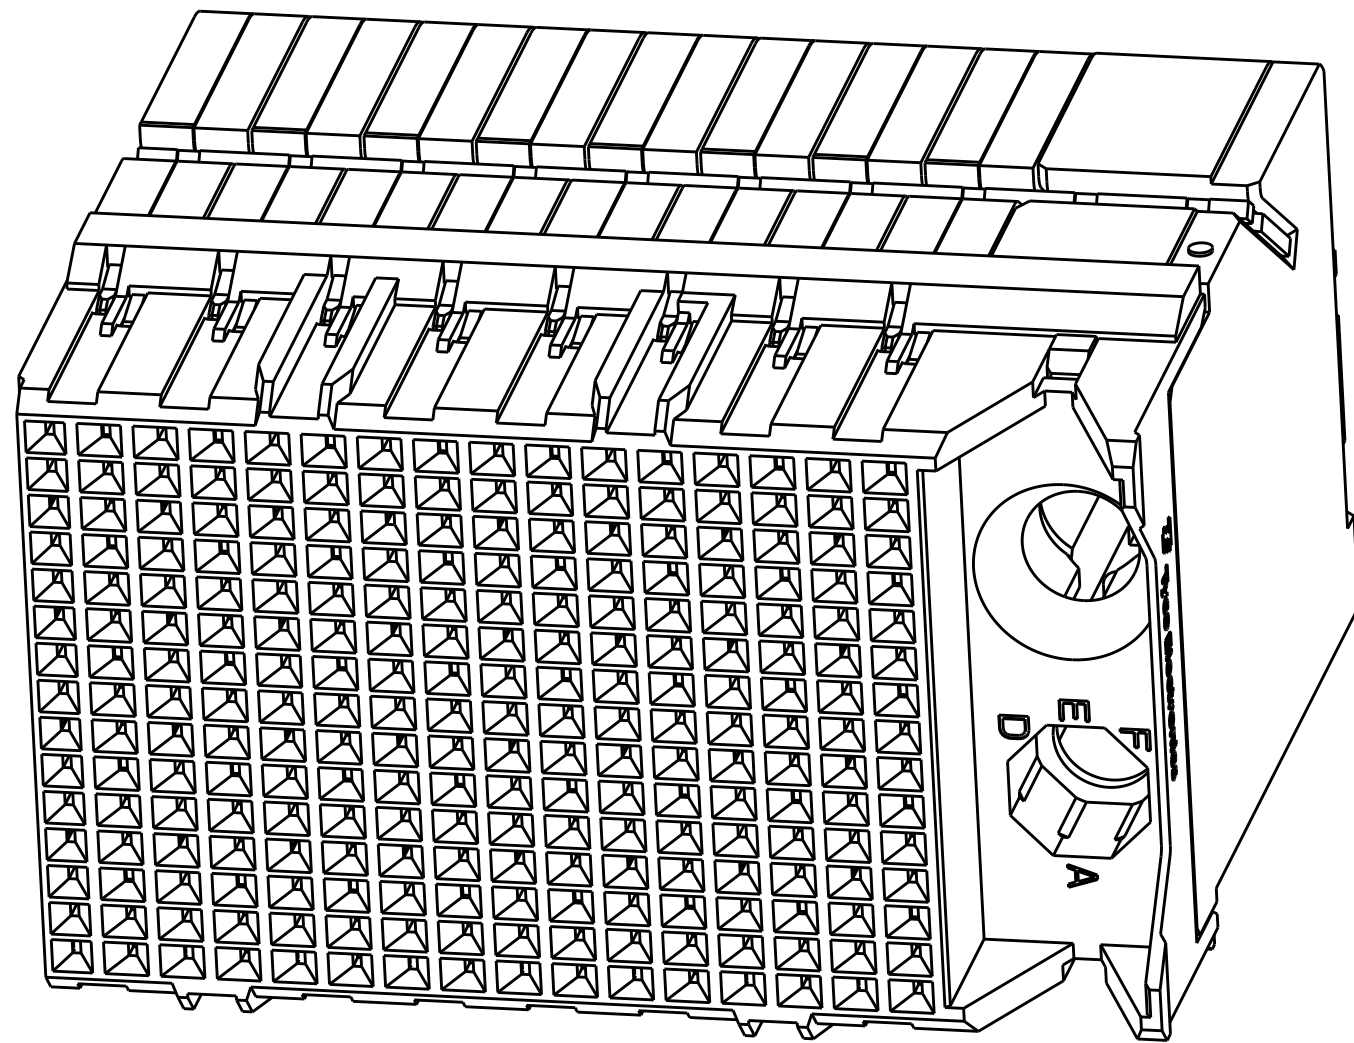

SCALE 4:1

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

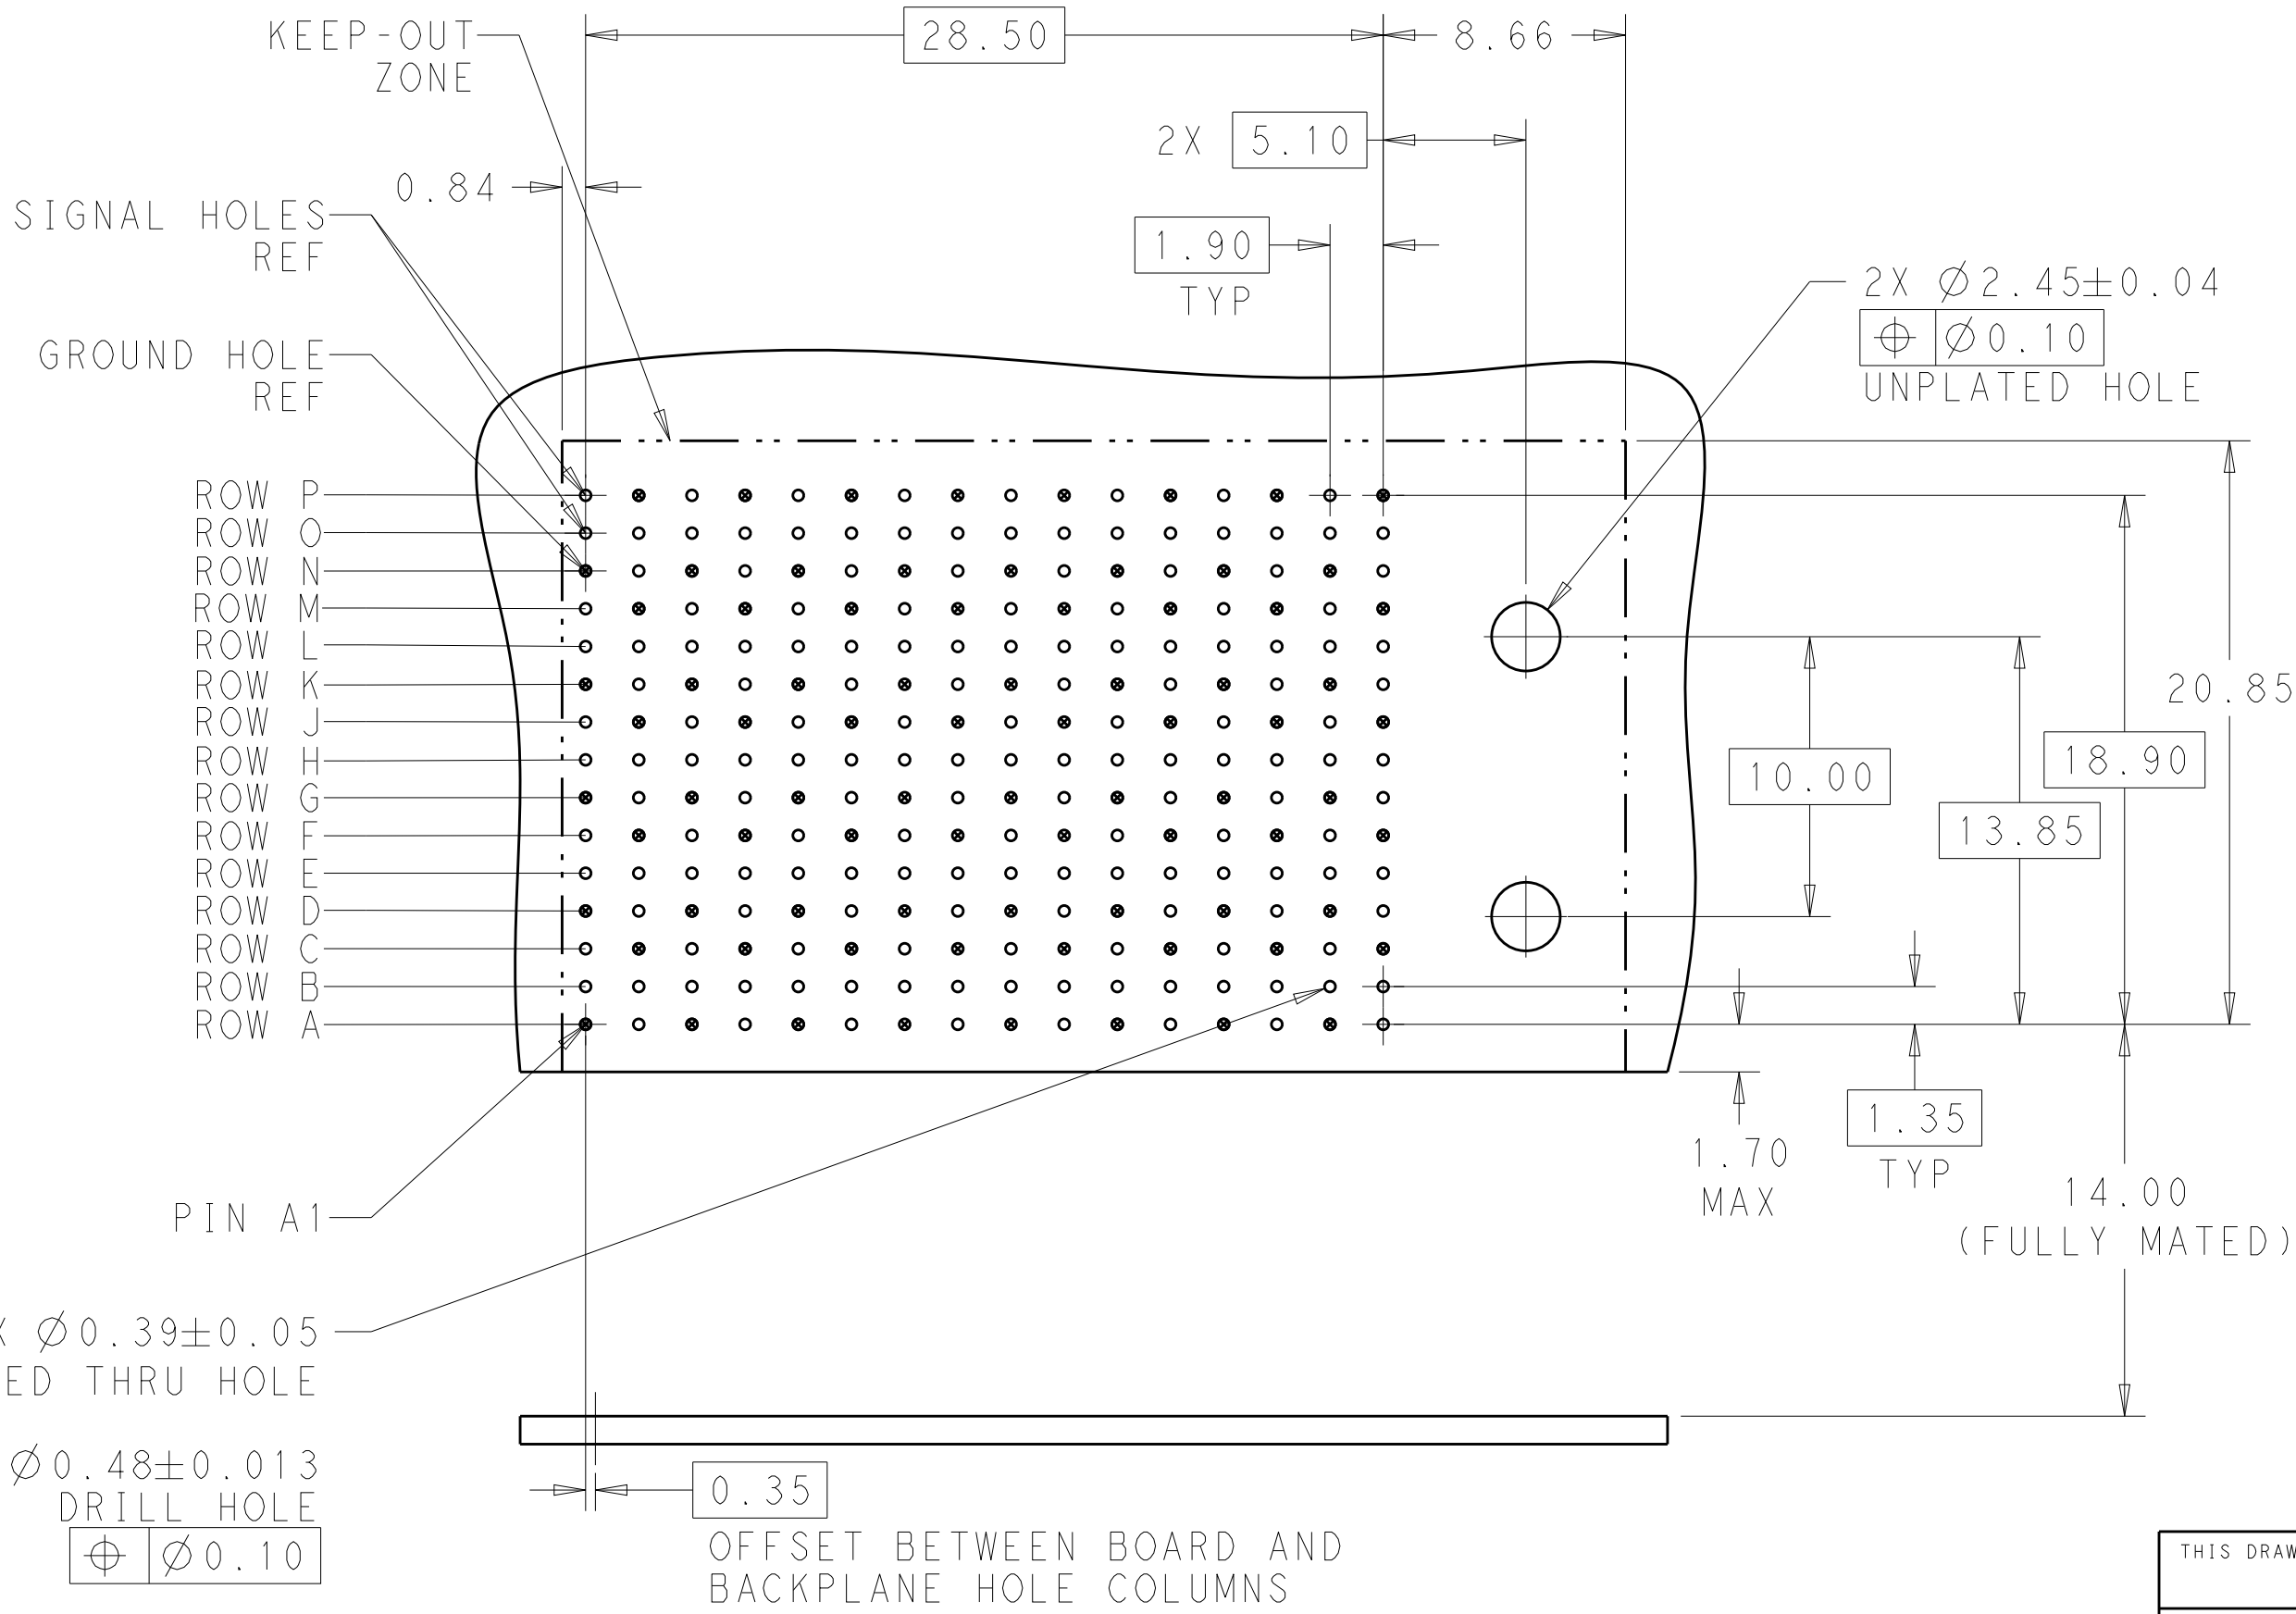

RECOMMENDED PCB LAYOUT
MIN BOARD THICKNESS 1.0

H	2	8-2110123-1
G	2	7-2110123-1
F	2	6-2110123-1
E	2	5-2110123-1
D	2	4-2110123-1
C	2	3-2110123-1
B	2	2-2110123-1
A	2	1-2110123-1
NONE	2	2110123-1
KEY POSITION	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO 06JAN2011	TE Connectivity	
DIMENSIONS:		CHK D. DIXON 06JAN2011		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. DIXON 06JAN2011	NAME	IMPACT, 5 PAIR, DAUGHTERCARD 16 COLUMN, RIGHT GUIDED, SIGNAL MODULE, 0.39 EYELET
	0 PLC ± 0.2	PRODUCT SPEC	SIZE	CAGE CODE
	1 PLC ± 0.13	APPLICATION SPEC	DRAWING NO	RESTRICTED TO
	2 PLC ± 0.13	WEIGHT	A100779	C=2110123
	3 PLC ± 0.13	Customer Drawing	SCALE	6:1
	4 PLC ± 0.13		SHEET	1 OF 1
ANGLES	FINISH		REV	C2
SEE TABLE				