


Data sheet | Item number: 706-2300/502-200

System cable; for Siemens S7-300; 8 analog outputs (current); Length: 2 m;
Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/502-200

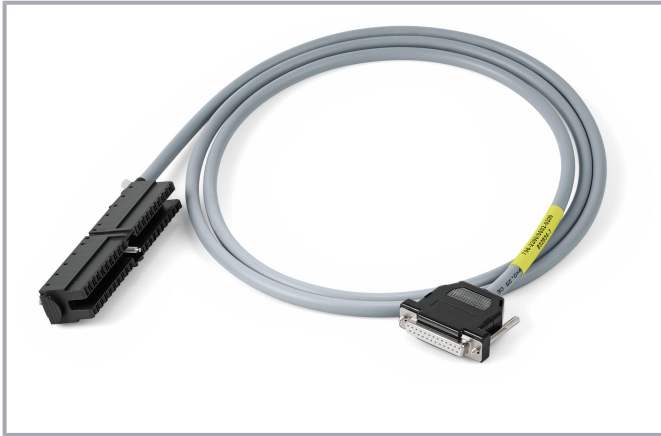

Data Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.
------	---

Electrical data

Inputs/outputs	8 analog outputs; current
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Connection data

Compatible PLC Modules	Siemens S7-300
Compatible PLC I/O Card Types	6ES7 332-5HF00-0AB0
Connection type (1)	System
Pluggable connectors	D-sub female connector
Connection type 2	System
Pole number 2	25
Connector 2	Siemens 6ES7-392-1BJ00-0AA0
Cable type	LiYCY
Wire cross-section	0.25 mm ²

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Color code	per DIN VDE 47100
------------	-------------------

Physical data

Cable length	2 m
--------------	-----

Material data

Weight	304 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

Product Group	30 ()
PU (SPU)	1 Stück
Country of origin	FR
GTIN	4045454881856
Customs tariff number	85444290900

Optional accessories

Interface module

Interface module



Item no.: 704-8013

Interface module for system wiring; with solder pin; Male connector; 25-pole; 8-channel analog input or output; 4-wire; PCB terminal blocks; in mounting carrier www.wago.com/704-8013

Downloads

Documentation

Bid Text

706-2300/502-200 X81 - Datei	2019. 2. 19.	xml 3.2 kB	Download
---------------------------------	--------------	---------------	----------

706-2300/502-200 doc - Datei	2015. 2. 9.	doc 26.6 kB	Download
---------------------------------	-------------	----------------	----------

Additional Information

Disposal; Electrical and electronic equipment, Packaging

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



V 1.0.0

pdf
265.8 kB

Download

System Description

WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf
545.9 kB

Download

CAD/CAE-Data

CAE data

WSCAD Universe 706-2300/502-200

URL

Download

WSCAD Universe 706-2300/502-200

URL

Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-2300/502-200

URL

Download

System cable; for Siemens S7-300; 8 analog outputs (current); Length: 2 m;
Conductor cross-section: 0.25 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.