# Product data sheet

Specifications



## NEMA Contactor, Type S, nonreversing, Size 00, 9A, 3 HP at 575 VAC, 3 phase, up to 100 kA, 3 pole, 240 VAC coil, open

8502SAO12V03

**Product availability : Stock - Normally stocked in distribution facility**

**Price* : 329.00 USD**

## Main

| | |
|---|---|
| **Product Type** | Contactor |
| **Product Range** | 8502S |
| **Contactor Type** | Non-reversing |

## Complementary

| | |
|---|---|
| **NEMA Size** | 00 |
| **Rated Current** | 9 A |
| **Number of Poles** | 3P |
| **Maximum Voltage Rating** | 600 V AC |
| **Phase** | 3 phase |
| **Horsepower Rating** | 1.5 HP 200 V AC<br>1.5 HP 230 V AC<br>2 HP 460 V AC<br>2 HP 575 V AC |
| **SCCR** | Circuit-breaker 70 A maximum, SCCR: 100 kA at 480 V AC<br>Fuse J 60 A maximum, SCCR: 100 kA at 600 V AC<br>Fuse T 60 A maximum, SCCR: 100 kA at 600 V AC<br>Fuse RK1 60 A maximum, SCCR: 100 kA at 600 V AC<br>Fuse RK5 60 A maximum, SCCR: 100 kA at 600 V AC |
| **Coil Voltage** | 240 V AC 60 Hz<br>220 V AC 50 Hz |
| **Control Circuit Type** | Common control circuit |
| **Control Units** | No control units |
| **Pilot Light** | No indicator |
| **Auxiliary Contacts** | Without |
| **Other Equipment** | Fuse not supplied |
| **Terminal Type** | Screw clamp terminals |
| **Height** | 4.34 in (110.24 mm) |
| **Width** | 3.22 in (81.79 mm) |
| **Depth** | 4.22 in (107.19 mm) |

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

## Environmental

| | |
|---|---|
| **Enclosure Type** | Not rated (open device) |
| **Certifications** | UL listed file E78351 CCN NLDX<br>CSA |

## Ordering and shipping details

| | |
|---|---|
| **Category** | 21191-8502,36 SA,SB(NOT S*R,T,W) |
| **Discount Schedule** | CP1 |
| **GTIN** | 785901001836 |
| **Nbr. of units in pkg.** | 1 |
| **Package weight(Lbs)** | 3.90 lb(US) (1.77 kg) |
| **Returnability** | No |
| **Country of origin** | MX |

## Packing Units

| | |
|---|---|
| **Unit Type of Package 1** | PCE |
| **Package 1 Height** | 6.00 in (15.24 cm) |
| **Package 1 width** | 4.50 in (11.43 cm) |
| **Package 1 Length** | 8.00 in (20.32 cm) |

## Offer Sustainability

| | |
|---|---|
| **California proposition 65** | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| **REACh Regulation** | REACh Declaration |
| **EU RoHS Directive** | Not compliant |
| **China RoHS Regulation** | China RoHS declaration<br>Product out of China RoHS scope. Substance declaration for your information. |

## Contractual warranty

| | |
|---|---|
| **Warranty** | 18 months |

## Dimensions

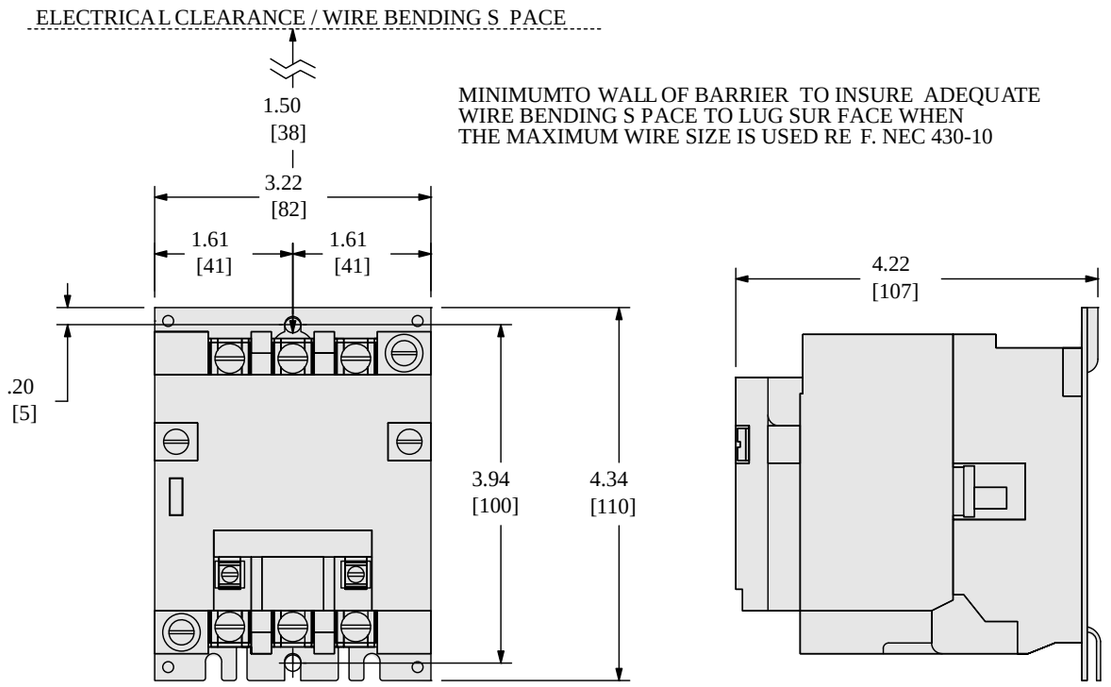


ALL DIMENSIONS ARE APPROXIMATE.
ALSO SEE TECHNICAL DRAWINGS AND DOCUMENTATION.