


L± 3%

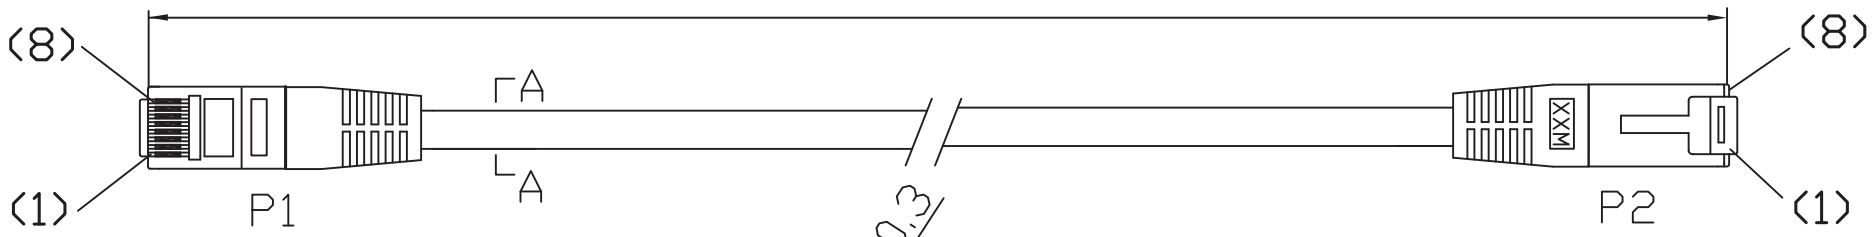


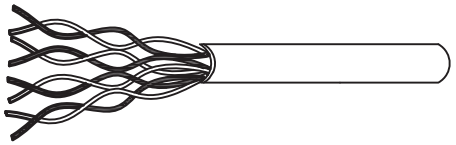


PIN OUT

| P1 | WIRE COLOR | P2 |
|---|---|---|
| 1 | ORANGE/WHITE | 1 |
| 2 | ORANGE | 2 |
| 3 | GREEN/WHITE | 3 |
| 6 | GREEN | 6 |
| 4 | BLUE | 4 |
| 5 | BLUE/WHITE | 5 |
| 7 | BROWN/WHITE | 7 |
| 8 | BROWN | 8 |

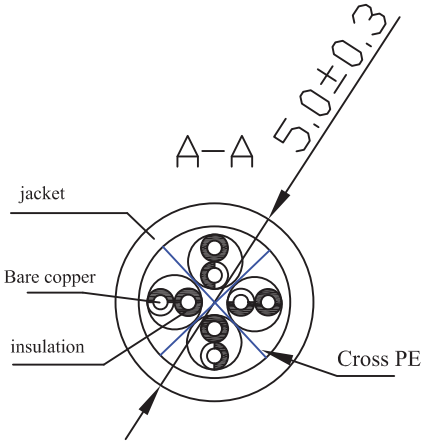

**Material:**

- Conductor: 26AWG 7*0.16±0.015mm
- Conductor Insulation color coding: (1)White/Orange, (1)Orange, (1)White/Green, (1)Green, (1)Blue, (1)White/Blue, (1)White/Brown, (1)Brown
- Included printing on cable jacket: *CM (UL) C(UL) 4P 26AWG UTP CAT.6 PATCH CABLE ISO/IEC & EN & ANSI/TIA-568-C.2*
- Cable Assembly: White cable tie, Wiring T568B color, Plug RJ45 8P8C 3μ pc UL 94V-2
- Cable Jacket color: Red, Yellow, Green or Blue
- Length: L±3%m
- Dielectric strength: 2.5KV dc-2seconds
- Working temperatures: -20°C~60°C

Order Code: A-MCU60**xxx**/**x**-R

Order lengths in meter: 0.5,1,2,3,5,7,10,15,20,30

Order color: Red, Yellow, Green, Blue

Unit: mm

RoHS Compliant

| Scale | |
|---|---|
| TOLERANCE | |
| X. | ±X |
| X.X | ±X |
| X.XX | ±X |
| DIM | TOL |
| X.° | ±X° |
| X.X° | ±X° |
| Angle | TOL |

| Id. | Modification | Date | Name |
|---|---|---|---|
| ① | Update | 20.02.13 | Wilson |

| | Date | Name |
|---|---|---|
| Drawn | 20.02.13 | Wilson |
| Approved | 20.02.13 | Groll |

ASSMANN WSW components

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title: Cat6 UTP Patch cable
26AWG, colored

ASSMANN WSW-No.: A-MCU60xxx/x-R

Drawing-No.:

rev01

Replace

Sheet 1/1