
ABC400 Series AC-DC Open Frame Power Supplies

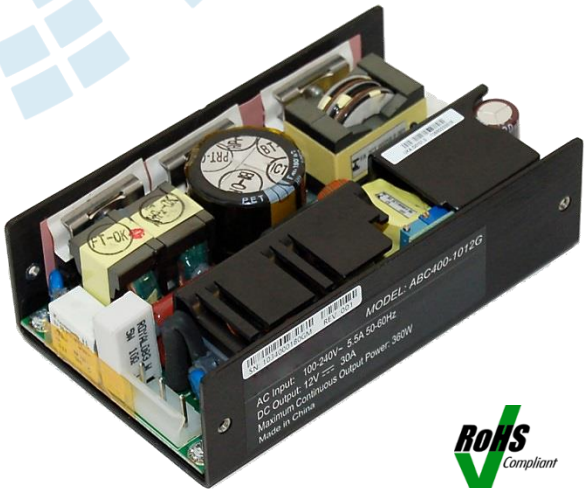

RoHS Compliant

Key Features & Benefits

- High Efficiency up to 91% at 230 VAC
- Universal AC Input Voltage Range: 90-264 VAC
- Active Power Factor Correction
- Over temperature, output overvoltage, overcurrent and short circuit protection
- Low Conducted and Radiated EMI (EN 55022 cl A)
- Safety approved to the latest edition of the following standards: CSA/UL60950-1, EN60950-1 and IEC60950-1
- High Power Density Design: 16 W/in^3
- Compact Size: 3.0 (W) x 1.5 (H) x 5.0 (L) inches
- RoHS Compliant
- CE Marked

ABC400 Series is a compact and efficient series of AC-DC open frame power supplies suited for telecom, datacom and many other applications.

The family meets the international information technology safety standards with the CE-Mark for the European Low Voltage Directive (LVD).

Their high efficiency allows a very minimal power loss in end equipment, resulting in higher reliability, ease of thermal management and regulatory approvals for an environmentally friendly end product.

Applications

- Telecom
- Datacom
- Industrial Applications

North America
+1-866.513.2839

Asia-Pacific
+86.755.29885888

Europe, Middle East
+353 61 225 977

tech.support@psbel.com
belpowersolutions.com

bel POWER SOLUTIONS & PROTECTION
a bel group

© 2015 Bel Power Solutions, Inc.

ORDERING INFORMATION

MODEL	INPUT VOLTAGE RANGE	OUTPUT VOLTAGE	NOM OUTPUT CURRENT	# OF OUTPUTS	OUTPUT POWER
ABC400-1012G	90 – 264 VAC	12 VDC	23 A	1	400 W
ABC400-1024G	90 – 264 VAC	24 VDC	13 A	1	400 W
ABC400-1048G	90 – 264 VAC	48 VDC	6.5 A	1	400 W

OVERVIEW

The ABC400-10XXG is a high efficiency and high power density AC to DC power supply. It incorporates interleaved transition mode PFC converter and well proven two-FET forward converter, providing increased system reliability and high efficiency with around 1m/s system air cooling, ABC400-1012G can delivery up to 360W continuous output power and 408W for ABC400-1024G and ABC400-1048G.

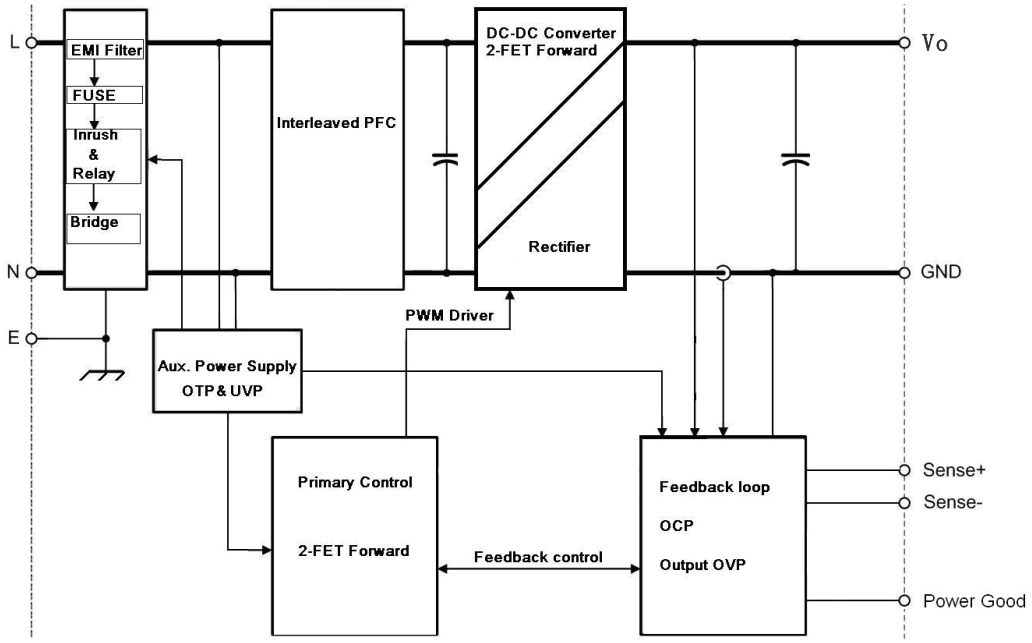


Figure 1: ABC400-10XXG block diagram

ABSOLUTE MAXIMUM RATINGS

Stresses in excess of the absolute maximum ratings may cause performance degradation, adversely affect long-term reliability, and cause permanent damage to the supply.

PARAMETER		CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNIT
$V_{i\,maxc}$	Max Continuous Input	Continuous Transient, 60 ms			264 300	VAC VAC

ENVIRONMENTAL AND MECHANICAL

PARAMETER		CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNIT
T_A	Ambient temperature	$V_{i\,min}$ to $V_{i\,max}$, $I_{o\,nom}$, $I_{SB\,nom}$	-10		+50	°C
T_{Aext}	Extended temp range	Derated output	+50		+70	°C
T_S	Storage temperature	Non-operational	-40		+85	°C
	Dimensions	Width		76.2		mm
		Height		38.1		mm
		Depth		127.0		mm
M	Weight			0.5		kg

+1.866.513.2839
tech.support@psbel.com
belpowersolutions.com

© 2015 Bel Power Solutions, Inc.

INPUT SPECIFICATIONS

General Condition: T_A = -10… 50 °C unless otherwise noted. Active fan air cooling required: 200 LFM (1 m/s)

PARAMETER		CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNIT
$V_{i\,nom}$	Nominal input voltage		100		240	VAC
V_i	Input voltage ranges	Normal operating ($V_{i\,min}$ to $V_{i\,max}$)	90		264	VAC
$I_{i\,max}$	Max input current				6.5	A_{rms}
$I_{i\,p}$	Inrush current limitation	$V_{i\,nom}$ = 115 VAC, T = 25°C (see Figure 2) $V_{i\,nom}$ = 230 VAC, T = 25°C (see Figure 3)			30 60	A_p
F_i	Input frequency		47	50/60	63	Hz
PF	Power factor	$V_{i\,nom}$ = 264 VAC, > 0.5 $I_{o\,nom}$	0.9			W/VA
$V_{i\,on}$	Turn-on input voltage[1]	Ramping up	80		88	VAC
$V_{i\,off}$	Turn-off input voltage[1]	Ramping down	72		80	VAC
η	Efficiency	$V_{i\,nom}$ = 230 VAC, 0.5·$I_{o\,nom}$, $V_{o\,nom}$, T_A = 25 °C $V_{i\,nom}$ = 230 VAC, 1.0·$I_{o\,nom}$, $V_{o\,nom}$, T_A = 25 °C		89 90		%
T_{hold}	Hold-up Time	After last AC zero point, V_o within regulation, V_i = 115 VAC, $P_{o\,nom}$	16			ms

INPUT FUSE

A slow-blow 8A input fuses (5 × 20 mm) in series with live line inside the power supply protects against severe defects. The fuse and a VDR form together with the input filter an effective protection against high input transients.

INRUSH CURRENT

The AC-DC power supply exhibits an X-capacitance of only 1.47 µF, resulting in a low and short peak current, when the supply is connected to the mains. The internal bulk capacitor will be charged through an power resistor which will limit the inrush current (see *Figure 2 and 3*).

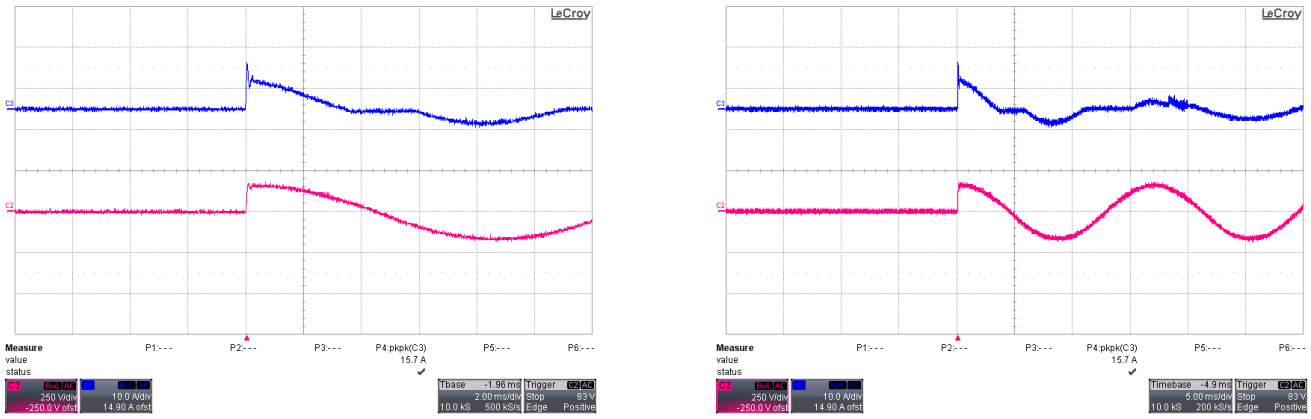


Figure 2: Inrush current, V_{in} = 115Vac, 90° CH2: V_{in} (250V/div), CH3: I_{in} (10A/div)

[1] The power supply is provided with a minimum hysteresis of 8 V during turn-on and turn-off within the ranges.

+1.866.513.2839
tech.support@psbel.com
belpowersolutions.com

© 2015 Bel Power Solutions, Inc.

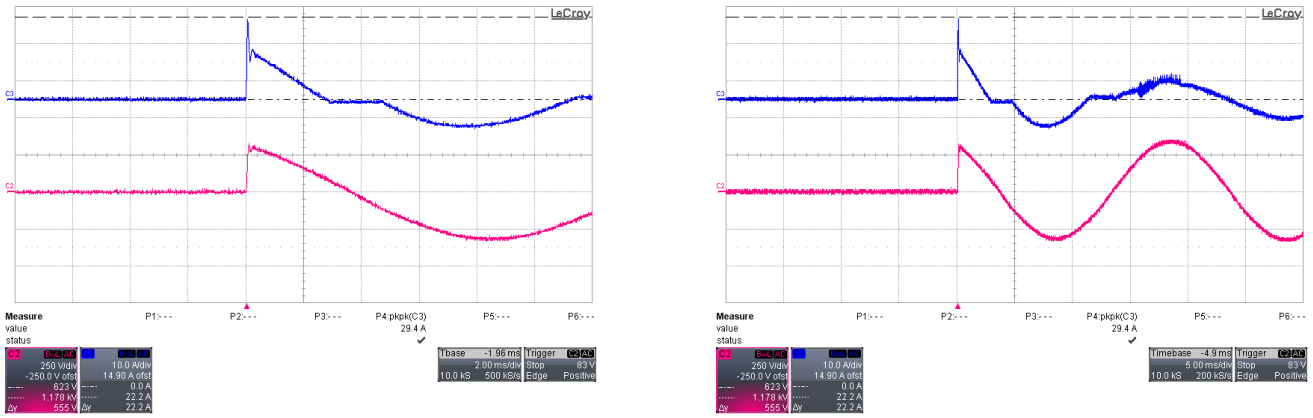


Figure 3: Inrush current, Vin = 230Vac, 90° CH2: Vin (250V/div), CH3: Iin (10A/div)

INPUT UNDER-VOLTAGE

If the sinusoidal input voltage stays below the input under voltage lockout threshold $V_{in\ on}$, the supply will be inhibited. Once the input voltage returns within the normal operating range, the supply will return to normal operation again.

POWER FACTOR CORRECTION

Power factor correction (PFC) is achieved by controlling the input current waveform synchronously with the input voltage. A specified PFC controller is implemented in the interleaved transition mode topology giving outstanding PFC results over a wide input voltage and load ranges. The input current will follow the shape of the input voltage.

EFFICIENCY

The high efficiency (see *Figure 4, 5 and 6*) is achieved by using state-of-the-art silicon power devices in conjunction with interleaved transition mode PFC topology minimizing switching losses. Synchronous rectifiers on the output reduce the losses in the high current output path for ABC400-1012G schottky diode and ultra-fast diode are used as rectifiers for ABC400-1024G and ABC400-1048G due to the high output voltage level.

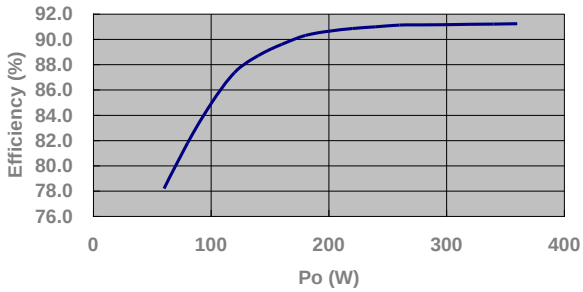


Figure 4: Efficiency vs. Output Power at 230VAC, ABC400-1012G

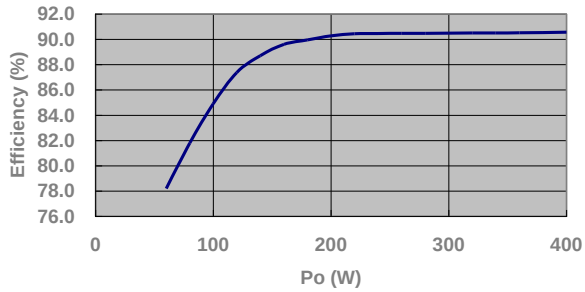


Figure 5: Efficiency vs. Output Power at 230VAC, ABC400-1024G

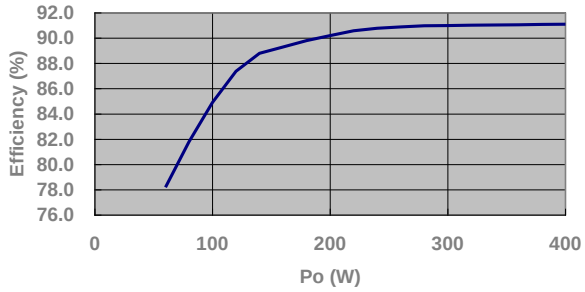


Figure 6: Efficiency vs. Output Power at 230VAC, ABC400-1048G

+1.866.513.2839
tech.support@psbel.com
belpowersolutions.com

© 2015 Bel Power Solutions, Inc.

OUTPUT SPECIFICATIONS

General Condition: T_A = -10 … +50 °C unless otherwise noted. Active fan air cooling required: 200 LFM (1 m/s)

PARAMETER		CONDITIONS / DESCRIPTION		MIN	NOM	MAX	UNIT
Main Output V_o							
V_o	Nominal Output Voltage	0.5 ·I_O, T_{amb} = 25 °C	ABC400-1012G		12.0		VDC
			ABC400-1024G		24.0		VDC
			ABC400-1048G		48.0		VDC
$V_{o\ set}$	Output Set Point Accuracy	0.5 ·I_O, T_{amb} = 25 °C	ABC400-1012G	-50		50	mV
			ABC400-1024G	-75		75	mV
			ABC400-1048G	-150		150	mV
$P_{o\ nom}$	Nominal Output Power		ABC400-1012G	0	276	360	W
			ABC400-1024G	0	312	408	W
			ABC400-1048G	0	312	408	W
$I_{o\ nom}$	Nominal Output Current		ABC400-1012G	0	23	30	A
			ABC400-1024G	0	13	17	A
			ABC400-1048G	0	6.5	8.5	A
$V_{o\ p-p}$	Output Ripple Voltage	$V_{o\ nom}$, $I_{o\ nom}$, 20 MHz BW	ABC400-1012G		60	120	mVpp
			ABC400-1024G		80	240	mVpp
			ABC400-1048G		150	480	mVpp
$dV_{o\ Load}$	Load Regulation	V_i = $V_{i\ nom}$, 0 - 100 % $I_{o\ nom}$	ABC400-1012G	-360	50	360	mV
			ABC400-1024G	-720	80	720	mV
			ABC400-1048G	-1440	130	1440	mV
$dV_{o\ Line}$	Line Regulation	V_i =$V_{i\ min}$...$V_{i\ max}$	ABC400-1012G	-360	80	360	mV
			ABC400-1024G	-720	120	720	mV
			ABC400-1048G	-1440	150	1440	mV
dV_{dyn}	Dynamic Load Regulation	ΔI_o = 50% $I_{o\ nom}$, I_o = 50 … 100% $I_{o\ nom}$, dI_o/dt = 1A/µs, recovery within 5% of $V_{o\ nom}$	ABC400-1012G	-0.6	0.25	0.6	V
			ABC400-1024G	-1.2	0.45	1.2	V
			ABC400-1048G	-2.4	0.7	2.4	V
t_{rec}	Recovery Time					2	ms
t_{delay}	Turn-On Delay	Time required for output within regulation after intial application of AC input @ 90 VAC		0	1	2	Sec
t_{rise}	Turn On Rise Time	V_O = 10…90% $V_{O\ nom}$	ABC400-1012G			20	ms
			ABC400-1024G			20	ms
			ABC400-1048G			30	ms
C_{Load}	Capacitive Loading		ABC400-1012G			6600	µF
			ABC400-1024G			3740	µF
			ABC400-1048G			1870	µF

+1.866.513.2839
tech.support@psbel.com
belpowersolutions.com

© 2015 Bel Power Solutions, Inc.

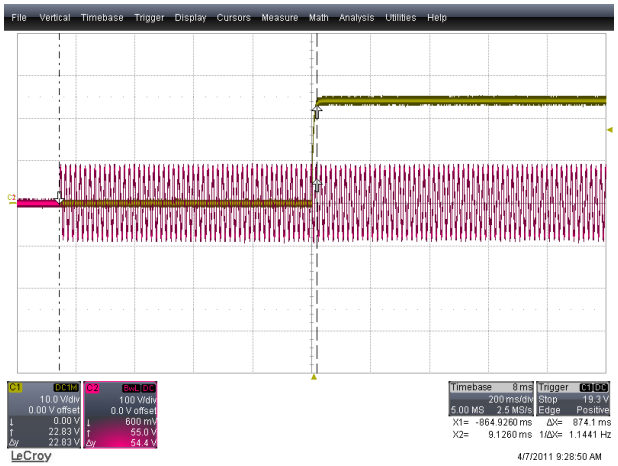


Figure 7: Turn-On AC Line 115 VAC, full load (200 ms/div)
CH1: V_o (10 V/div) CH2: Vin (100 V/div)

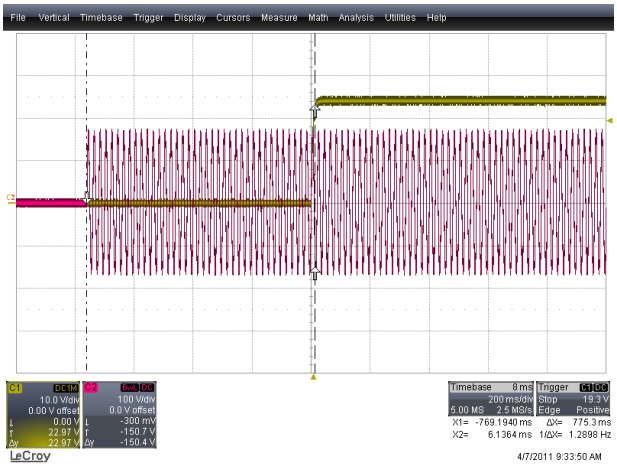


Figure 8: Turn-On AC Line 230 VAC, full load (200 ms/div)
CH1: V_o (10 V/div) CH2: Vin (100 V/div)

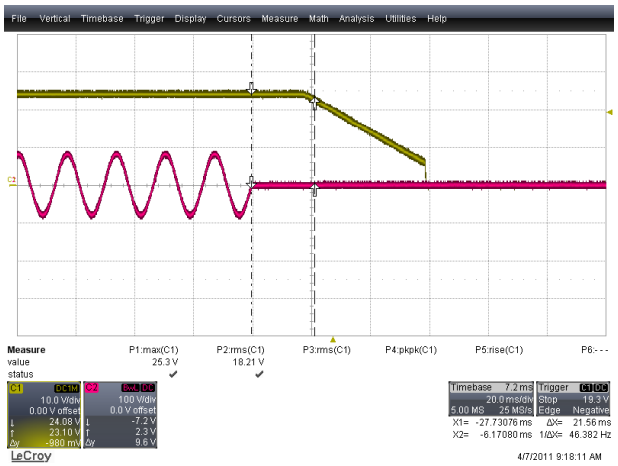


Figure 9: Turn-Off AC Line 115 VAC, full load (10 ms/div)
CH1: V_o (10 V/div) CH2: Vin (100 V/div)

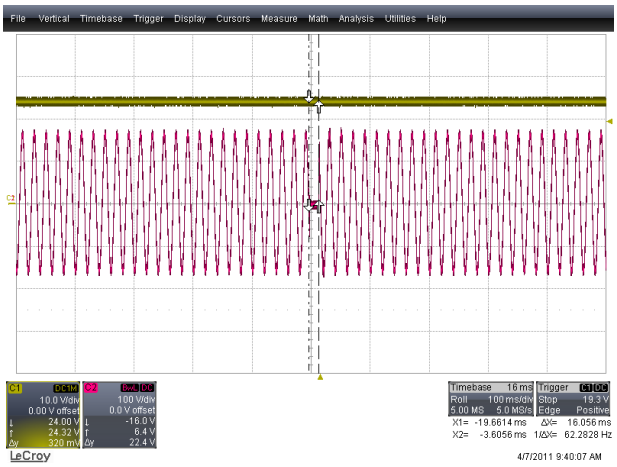


Figure 10:AC drop out 16ms (100 ms/div)
CH1: V_o (10 V/div) CH2: V_{in} (100 V/div)



Figure 11:AC drop out 30ms (500 ms/div), V_o restart
CH1: V_o (10 V/div) CH2: V_{in} (200 V/div)

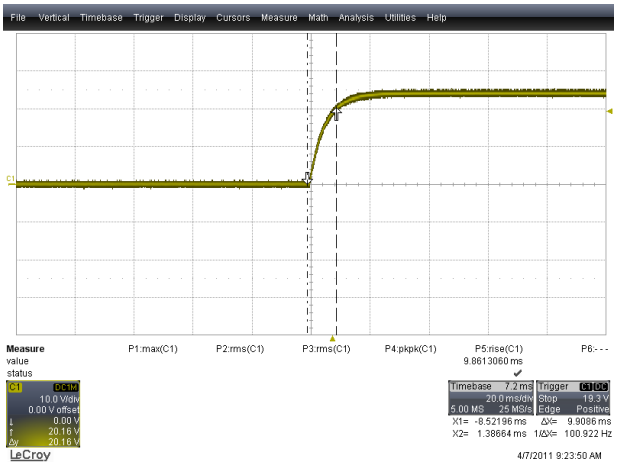


Figure 12:V_o rise time at 115VAC (20 ms/div)
CH1: V_o (10 V/div)

+1.866.513.2839
tech.support@psbel.com
belpowersolutions.com

© 2015 Bel Power Solutions, Inc.

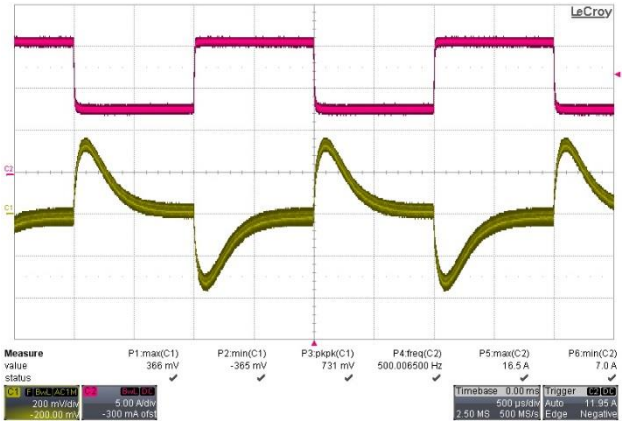


Figure 13:Load transient V_o (500µs/div), 8.5A <-> 17A 2A/µs
CH1: V_o (200mV/div) CH2: I_o (5.0 A/div)

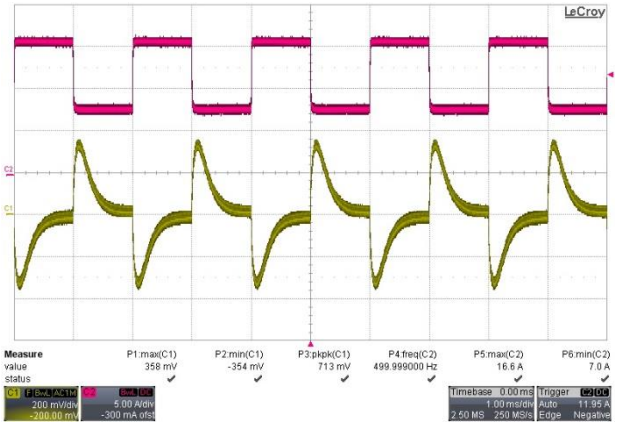


Figure 14:Load transient V_o (1.0ms/div), 8.5A <-> 17A, 2A/µs
CH1: V_o (200 mV/div) CH2: I_o (5 A/div)

PROTECTION

PARAMETER		CONDITIONS / DESCRIPTION		MIN	NOM	MAX	UNIT
F	Input Fuses (L only)	Not user accessible, time lag characteristic			8.0		A
Vo ov	OV Threshold		ABC400-1012G	14.0		16.0	VDC
			ABC400-1024G	28.0		32.0	VDC
			ABC400-1048G	53		57	VDC
$I_{o\ lim}$	Current Limit	V_i > 90 VAC, -10 °C < T_a < 50 °C	ABC400-1012G	31.5	33.0	39.0	A
			ABC400-1024G	20.0	21.0	23.0	A
			ABC400-1048G	8.9	10	11.1	A
T_{SD}	Over Temperature on Heat Sinks	Automatic shut-down			100		°C

OVERVOLTAGE PROTECTION

The AC-DC power supply provides a fixed threshold overvoltage (OV) protection implemented with a HW comparator. Once an OV condition has been triggered, the supply will shut down and latch the fault condition. the latch can be unlocked by disconnecting the supply from the AC mains only.

CURRENT LIMITATION

The main output current limitation will decrease with linear derating to 50% at 70 °C if the ambient (inlet) temperature increases beyond 50 °C (see *Figure 15*).

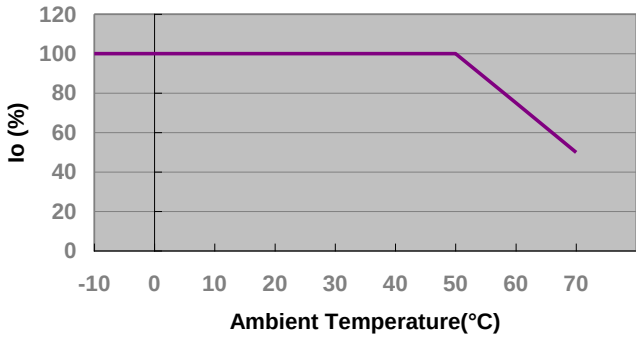


Figure 15: Output Current Limitation Curve

+1.866.513.2839
tech.support@psbel.com
belpowersolutions.com

© 2015 Bel Power Solutions, Inc.

POWER GOOD SIGNAL

The Out-OK output gives a status indication of the converter and the output voltages. It can be used for control functions such as data protection, central system monitoring or as a part of a self-testing system. Connecting the Out-OK as shown in *Figure 16*, Vok <1.0 V indicates that the output voltage(s) of the converter are within the range.

Note: using the potentiometer, the monitor level tracks the programmed output voltage. In an error condition, if the output voltage is out of range due to overload or an external overvoltage, Vok will approach Vp. The output is formed by an NPN transistor. The signal is isolated from the output.

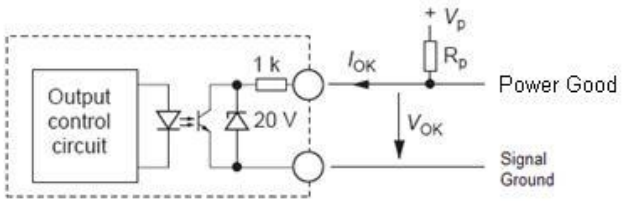


Figure 16: Power Good signal

Power Good Signal Description:

1. O/P V OK – Signal Low, Opto conducting, (max sink current 0.5 mA)
2. O/P V Bad – Signal High, Opto opening, (max leakage current 25 µA)

ELECTROMAGNETIC COMPATIBILITY

IMMUNITY

Note: Most of the immunity requirements are derived from EN 55024:1998/A2:2003.

TEST	STANDARD / DESCRIPTION	CRITERIA
ESD Contact Discharge	EN 61000-4-2, Level 2	A
RF Susceptibility	EN 61000-4-3, Level 3	A
Fast Transient/Burst	EN 61000-4-4, Level 3	B
Surge	EN 61000-4-5, Class 3	B
RF Conducted Immunity	EN 61000-4-6, Class 3	A
Voltage Dips and Interruptions	EN 61000-4-11	C
Magnetic Fields	EN 61000-4-8	A

+1.866.513.2839
tech.support@psbel.com
belpowersolutions.com

© 2015 Bel Power Solutions, Inc.

SAFETY / APPROVALS

Maximum electric strength testing is performed in the factory according to IEC/EN 60950, and UL 60950. input-to-output electric strength tests should not be repeated in the field. Bel Power Solutions will not honor any warranty claims resulting from electric strength field tests.

PARAMETER		DESCRIPTION / CONDITIONS	MIN	NOM	MAX	UNIT
	Safety Approvals	Safety approved to the latest edition of the following standards: CSA/UL60950-1, EN60950-1 and IEC60950-1. CE Mark for LVD CB Approval				
	Insulation Safety Rating	Input / Case		Basic		
		Input / Output		Reinforced		
		Output / Case		Functional		
dc	Creepage / Clearance	Primary (L/N) to protective earth (PE)		According to safety standard		mm
		Primary to secondary				mm
	Electrical Strength Test	Input to case		2121		VDC
		Input to output		4242		VDC
		Output and Signals to case		707		VDC

MECHANICAL

DIMENSIONS

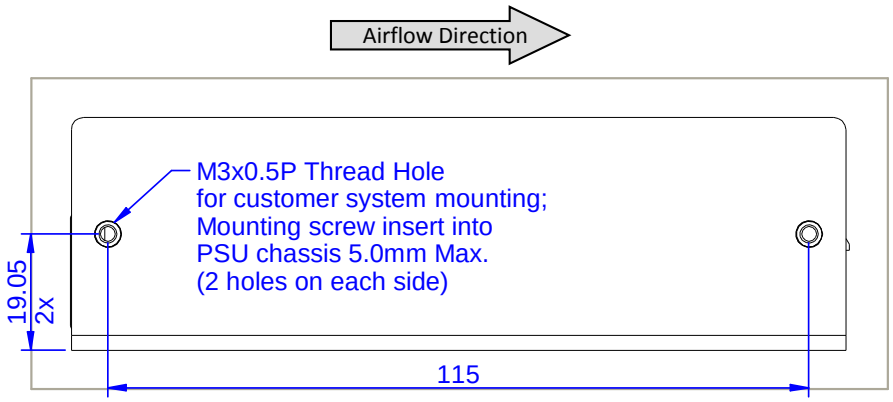


Figure 17: Side view 1

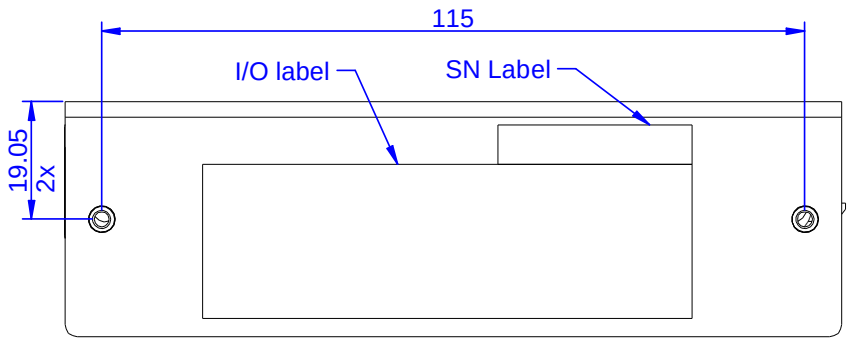


Figure 18: Side view 2

Note: A 3D step file of the power supply casing is available on request.

+1.866.513.2839
tech.support@psbel.com
belpowersolutions.com

© 2015 Bel Power Solutions, Inc.

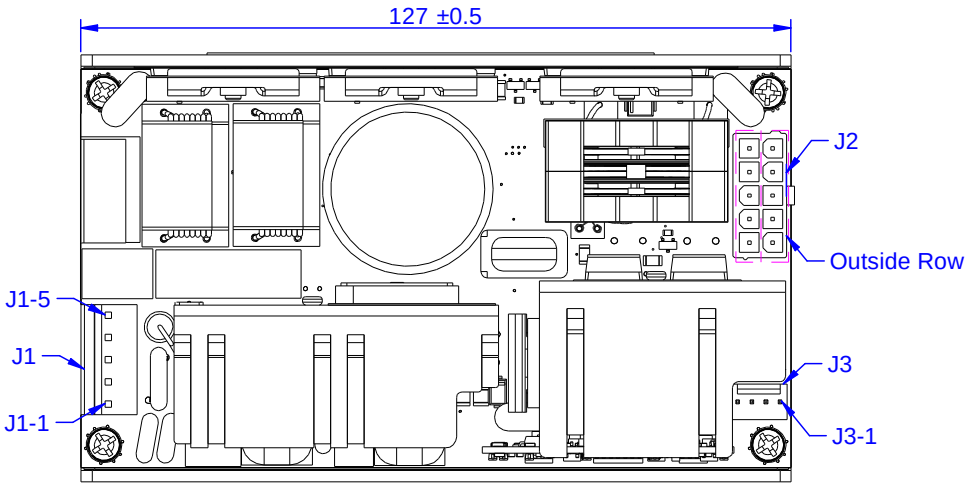


Figure 19: Top view

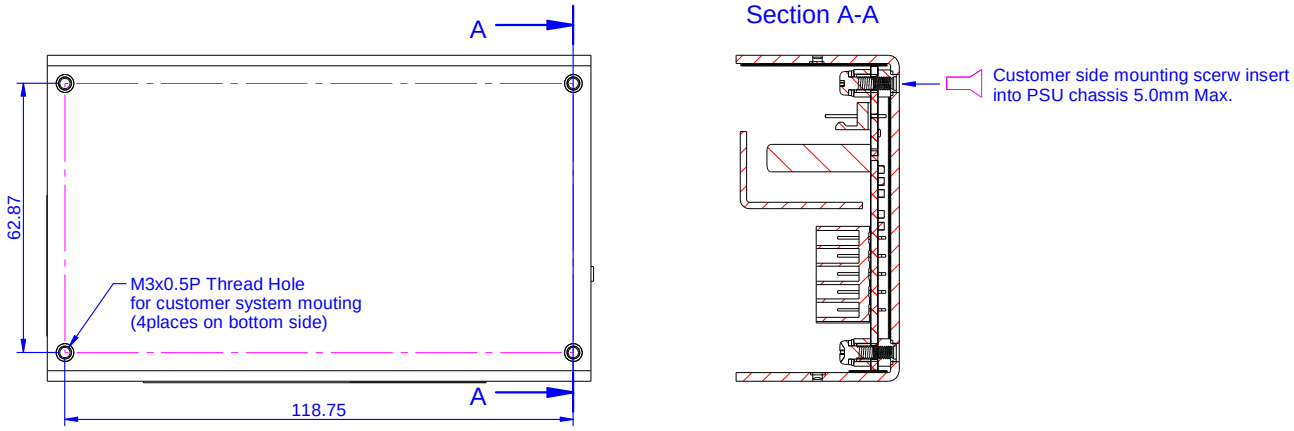


Figure 20: Bottom view 2

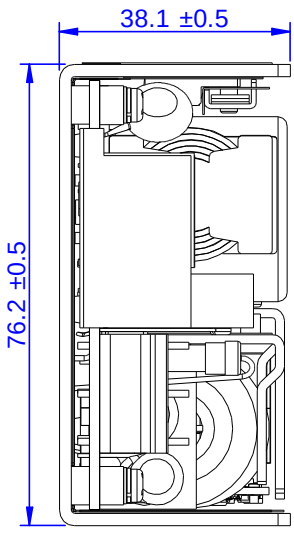


Figure 21: Front view

+1.866.513.2839
tech.support@psbel.com
belpowersolutions.com

© 2015 Bel Power Solutions, Inc.

ABC400 Series

CONNECTIONS

PIN	NAME	DESCRIPTION
Input Connector J1		
J1- 1	Earth	AC Input Earth
J1- 2	Not fitted	NA
J1- 3	Live	AC Input Live
J1- 4	Not fitted	NA
J1- 5	Neutral	AC Input Neutral
Output Connector J2		
J2-outside row	+Vo	+12V / +24V / +48V Output
J2-inside row	-Vo	+12V / +24V / +48V Output Return
Signal Connector J3		
J3- 1	-Vo Sense	Output Negative Sense
J3- 2	+Vo Sense	Output Positive Sense
J3- 3	Power Good	Power Good Signal
J3- 4	Power Good Return	Power Good Signal Return

Connector Mating Parts (Molex or equivalent)

CONNECTOR	HOUSING	CRIMP TERMINAL	WIRE GAUGE
J1	09-50-3051	08-50-0105	AWG#18
J2	39-01-2105	44476-3112	AWG#16
J3	22-01-3047	08-50-0113	AWG#22-30

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.
TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

+1.866.513.2839
tech.support@psbel.com
belpowersolutions.com

© 2015 Bel Power Solutions, Inc.