


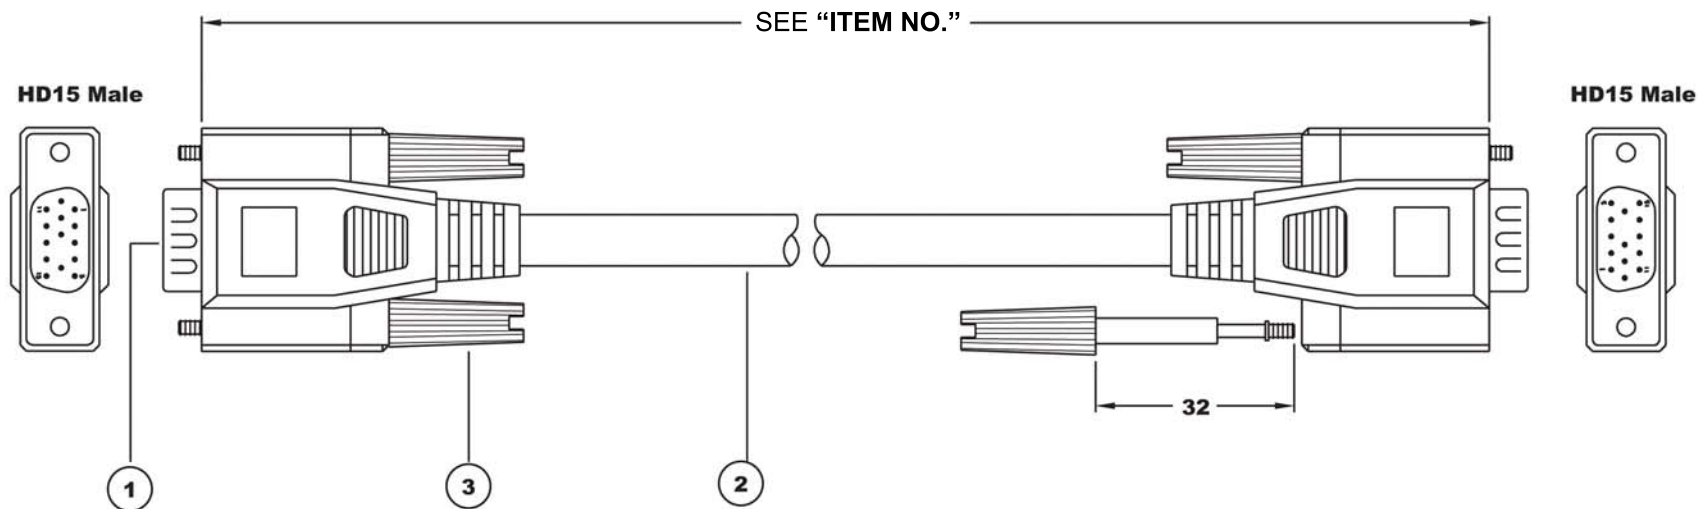

Material:

- 1.Cable: #28,UL2919, 3COAX+4C+1+AL/MY+B,O.D:8.1
- 2.Connector: HD15M, 9th Empty, Black
- 3.Thumbscrew:#4-40UNC, E32
- 4.Black Heat Shrink:Ø1.5x15:6PCS Ø3x8:6PCS
- 5.Copper Size:30X50

Note:

- 1.Total Length: SEE "ITEM NO."
- 2.Color: Beige
- 3.Molded Type
- 4.360° Solder

Configuration:

HD15M		HD15M
1	Red(Coax)	1
6	Red(Ground)	6
2	Green(Coax)	2
7	Green(Ground)	7
3	Blue(Coax)	3
8	Blue(Ground)	8
4	Brown	4
5	Black	5
13	Orange	13
14	White	14
Shield	(Braid)	Shield

RoHS
Compliant

ITEM NO AK3760-R (3 Meters)
AK3770-R (5 Meters)
AK3780-R (10 Meters)

TITLE
PREMIUM **VGA** Monitor Connection Cable,
HD DSUB 15-Pin Male to HD DSUB 15-Pin Male

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
© Copyright 2008 by Assmann Electronic Components
All International Rights Reserved