


Electrical Test:

1. 100% short, open, miswire test
2. Contractor Resistance: 2Ω Max.
3. Insulation Resistance: 5Ω Min.

NO.	DESCRIPTION
⑤	OUTER MOLD: PVC 45P COLOR BEIGE(CS-B02)
④	INNER MOLD: PE COLOR TRANSPARENT
③	CONNECTOR: USB A JACK SOLDER TYPE INSULATION: WHITE.
②	CONNECTOR: USB A PLUG SOLDER TYPE INSULATION: WHITE.
①	CABLE: UL2725 28AWG*1P+24AWG*2C+A.D+B65% O.D:4.7MM PVC JACKET COLOR BEIGE(CS-B02)

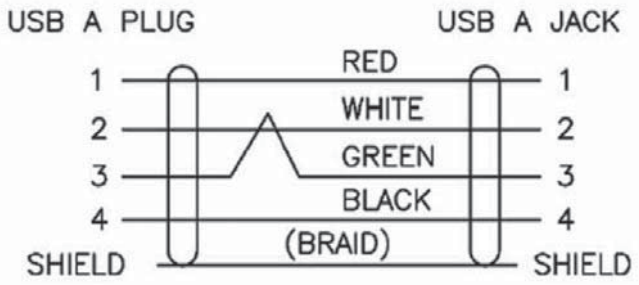

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	08.29.11	Chappell
Approved		

ASSMANN WSW components

Item No. **AK669-18-R (1.8 Meters)**
AK669-30-R (3.0 Meters)
AK669-50-R (5.0 Meters)

Title USB Extention Cable Version 1.1, USB A Male to USB A Female

Drawing No.

rev00

Replace

Sheet