


Part No. **AL-H483SW3C**

Diff No.

4.8 mm

Type : LED Lamps

Package Dimension :

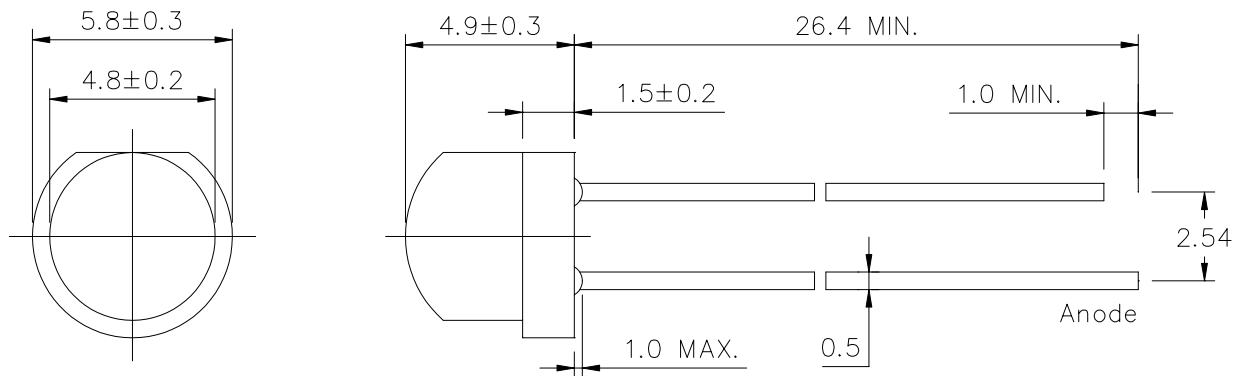

Notes:

1. All dimensions are in millimeter.
2. An epoxy meniscus may extend about.
1. 5mm(0.059") down to the lead
3. Tolerances unless Dimension ± 0.25 mm

■ Features :

- Choice of various viewing angles.
- Available on Tape and Reel.
- Reliable and robust.

■ Descriptions :

- The series is specially designed for application requiring higher brightness.
- The LED lamps are available with different colors, intensity, epoxy colors etc.

■ Applications :

- TV set
- Monitor
- Telephone

Part No. **AL-H483SW3C**

Diff No.

4.8 mm

Type : LED Lamps

PART NO.	Chip		Lens Color
	Material	Emitted Color	
AL-H483SW3C	InGaN	Sunset White	Water Clear

■ Absolute Maximum Ratings at Ta=25℃

Parameter	Symbol	Rating	Unit
Forward Current	I _F	20	mA
Operating Temperature	T _{opr}	-20 to +85	℃
Storage Temperature	T _{stg}	-40 to +100	℃
Soldering Temperature	T _{sol}	260 ± 5	℃
Electrostatic Discharge	ESD	1000	V
Power Dissipation	P _D	100	mW
Peak Forward Current (Duty 1/10@1KHz)	I _F (Peak)	100	mA
Reverse Voltage	V _R	5	V

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I _V	240	370	/	mcd	I _F =20mA
Viewing Angle	2θ _{1/2}	/	75	/	deg	I _F =20mA
Chromatically Coordinates	X	/	0.45	/	/	I _F =20mA
	Y	/	0.41	/		
Forward Voltage	V _F	/	3.5	4.0	V	I _F =20mA
Reverse Current	I _R	/	/	10	μA	V _R =5V

Part No. **AL-H483SW3C**

Diff No.

4.8 mm

Type : LED Lamps

■ Reliability test items and conditions :

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C±5°C	5SEC	76PCS	0/1
2	Temperature Cycle	H : +85°C 30min └ 5min L : -55°C 30min	50CYCLES	76PCS	0/1
3	Thermal Shock	H : +100°C 5min └ 10sec L : -10°C 5min	50CYCLES	76PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000HRS	76PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000HRS	76PCS	0/1
6	DC Operating Life	TEMP : 25°C I _F =20mA	1000HRS	76PCS	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000HRS	76PCS	0/1


Part No. **AL-H483SW3C**

Diff No.


4.8 mm

Type : LED Lamps


■ Typical Characteristics (The data typical, and the value is not guaranteed.)

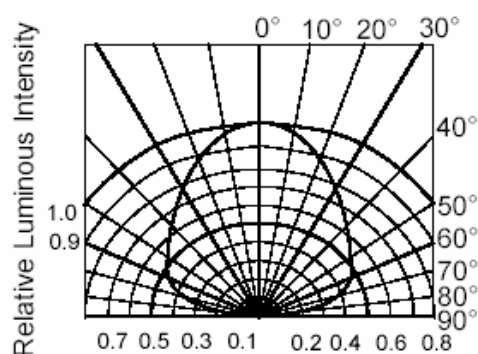


RADIATION DIAGRAM

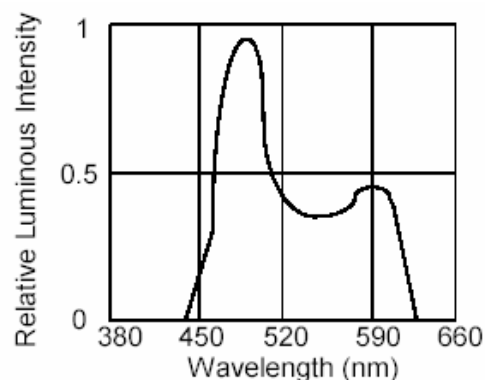


**RELATIVE LUMINOUS INTENSITY
Vs. WAVELENGTH**

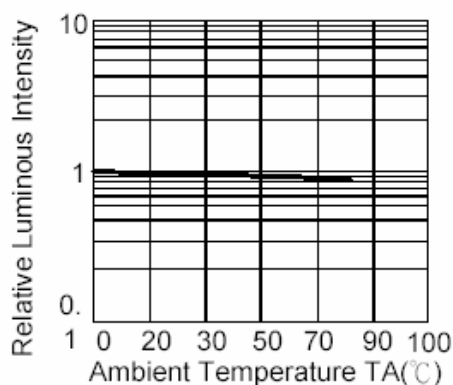


**LUMINOUS INTENSITY
Vs. AMBIENT TEMPERATURE**

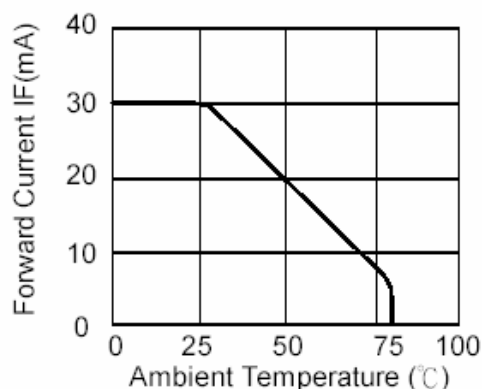

**FORWARD CURRENT
Vs. AMBIENT TEMPERATURE**

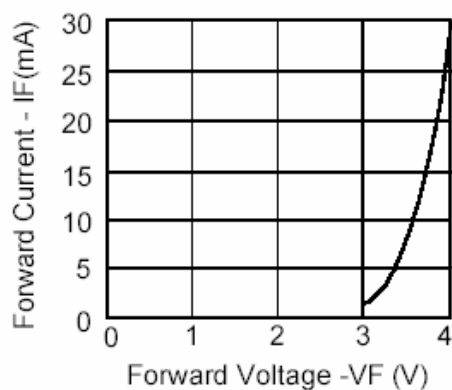

**FORWARD CURRENT
Vs. FORWARD VOLTAGE**

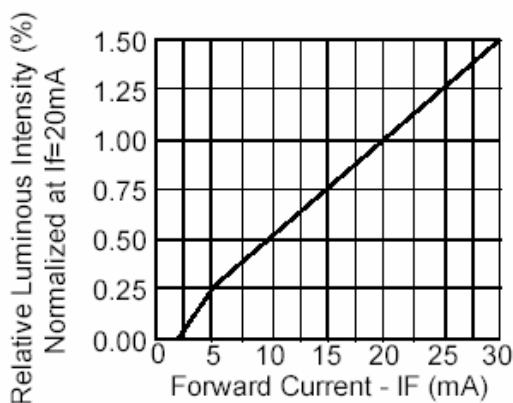

**LUMINOUS INTENSITY
Vs. FORWARD CURRENT**