

## LED NUMERIC DISPLAY, 2 DIGIT

BL-D80X-21

### Features:

- Ø 20.3mm (0.80") Dual digit Seven Segment LED display series
- Ø Low current operation.
- Ø Excellent character appearance.
- Ø Easy mounting on P.C. Boards or sockets.
- Ø I.C. Compatible.
- Ø ROHS Compliance.



### Super Bright

**Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)**

| Part No         |                 | Chip          |                 |                     | VF Unit:V |      | Iv<br>TYP.(mcd) |
|-----------------|-----------------|---------------|-----------------|---------------------|-----------|------|-----------------|
| Common Cathode  | Common Anode    | Emitted Color | Material        | $\lambda_p$<br>(nm) | Typ       | Max  |                 |
| BL-D80C-21S-XX  | BL-D80D-21S-XX  | Hi Red        | GaAlAs/GaAs,SH  | 660                 | 1.85      | 2.20 | 120             |
| BL-D80C-21D-XX  | BL-D80D-21D-XX  | Super Red     | GaAlAs/GaAs,DH  | 660                 | 1.85      | 2.20 | 150             |
| BL-D80C-21UR-XX | BL-D80D-21UR-XX | Ultra Red     | GaAlAs/GaAs,DDH | 660                 | 1.85      | 2.20 | 180             |
| BL-D80C-21E-XX  | BL-D80D-21E-XX  | Orange        | GaAsP/GaP       | 635                 | 2.10      | 2.50 | 70              |
| BL-D80C-21Y-XX  | BL-D80D-21Y-XX  | Yellow        | GaAsP/GaP       | 585                 | 2.10      | 2.50 | 70              |
| BL-D80C-21G-XX  | BL-D80D-21G-XX  | Green         | GaP/GaP         | 570                 | 2.20      | 2.50 | 75              |

### Ultra Bright

**Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)**

| Part No          |                  | Chip             |          |                     | VF Unit:V |      | Iv<br>TYP.(mcd) |
|------------------|------------------|------------------|----------|---------------------|-----------|------|-----------------|
| Common Cathode   | Common Anode     | Emitted Color    | Material | $\lambda_p$<br>(nm) | Typ       | Max  |                 |
| BL-D80C-21UHR-XX | BL-D80D-21UHR-XX | Ultra Red        | AlGaInP  | 645                 | 2.10      | 2.50 | 180             |
| BL-D80C-21UE-XX  | BL-D80D-21UE-XX  | Ultra Orange     | AlGaInP  | 630                 | 2.10      | 2.50 | 120             |
| BL-D80C-21YO-XX  | BL-D80D-21YO-XX  | Ultra Amber      | AlGaInP  | 619                 | 2.10      | 2.50 | 120             |
| BL-D80C-21UY-XX  | BL-D80D-21UY-XX  | Ultra Yellow     | AlGaInP  | 590                 | 2.10      | 2.50 | 120             |
| BL-D80C-21UG-XX  | BL-D80D-21UG-XX  | Ultra Green      | AlGaInP  | 574                 | 2.20      | 2.50 | 145             |
| BL-D80C-21PG-XX  | BL-D80D-21PG-XX  | Ultra Pure Green | InGaN    | 525                 | 3.80      | 4.50 | 210             |
| BL-D80C-21B-XX   | BL-D80D-21B-XX   | Ultra Blue       | InGaN    | 470                 | 2.70      | 4.20 | 95              |
| BL-D80C-21W-XX   | BL-D80D-21W-XX   | Ultra White      | InGaN    | /                   | 2.70      | 4.20 | 95              |

### -XX: Surface / Lens color :

| Number            | 0           | 1              | 2            | 3              | 4               | 5 |
|-------------------|-------------|----------------|--------------|----------------|-----------------|---|
| Ref Surface Color | White       | Black          | Gray         | Red            | Green           |   |
| Epoxy Color       | Water clear | White diffused | Red Diffused | Green Diffused | Yellow Diffused |   |

# LED NUMERIC DISPLAY, 2 DIGIT

BL-D80X-21

## Absolute maximum ratings (Ta=25°C)

| Parameter                                          |                                                                       | S   | D   | UR  | E   | Y   | G   | Unit |
|----------------------------------------------------|-----------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|------|
| Forward Current $I_F$                              |                                                                       | 25  | 25  | 25  | 25  | 25  | 30  | mA   |
| Power Dissipation $P_d$                            |                                                                       | 60  | 60  | 60  | 60  | 60  | 65  | mW   |
| Reverse Voltage $V_R$                              |                                                                       | 5   | 5   | 5   | 5   | 5   | 5   | V    |
| Peak Forward Current $I_{PF}$<br>(Duty 1/10 @1KHZ) |                                                                       | 150 | 150 | 150 | 150 | 150 | 150 | mA   |
| Operation Temperature $T_{OPR}$                    | -40 to +80                                                            |     |     |     |     |     |     | °C   |
| Storage Temperature $T_{STG}$                      | -40 to +85                                                            |     |     |     |     |     |     | °C   |
| Lead Soldering Temperature<br>$T_{SOL}$            | Max.260±5°C for 3 sec Max.<br>(1.6mm from the base of the epoxy bulb) |     |     |     |     |     |     | °C   |

## Absolute maximum ratings (Ta=25°C)


| Parameter                                          | UHR                                                                   | UE  | YO  | UY  | UG  | PG  | UB  | UW  | Unit |
|----------------------------------------------------|-----------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|------|
| Forward Current $I_F$                              | 30                                                                    | 30  | 30  | 30  | 30  | 30  | 30  | 30  | mA   |
| Power Dissipation $P_d$                            | 75                                                                    | 65  | 65  | 65  | 75  | 110 | 120 | 120 | mW   |
| Reverse Voltage $V_R$                              | 5                                                                     | 5   | 5   | 5   | 5   | 5   | 5   | 5   | V    |
| Peak Forward Current $I_{PF}$<br>(Duty 1/10 @1KHZ) | 150                                                                   | 150 | 150 | 150 | 150 | 150 | 100 | 100 | mA   |
| Operation Temperature $T_{OPR}$                    | -40 to +80                                                            |     |     |     |     |     |     |     | °C   |
| Storage Temperature $T_{STG}$                      | -40 to +85                                                            |     |     |     |     |     |     |     | °C   |
| Lead Soldering Temperature<br>$T_{SOL}$            | Max.260±5°C for 3 sec Max.<br>(1.6mm from the base of the epoxy bulb) |     |     |     |     |     |     |     | °C   |

## LED NUMERIC DISPLAY, 2 DIGIT


BL-D80X-21

### Package configuration & Internal circuit diagram


#### BL-D80X-21 Series

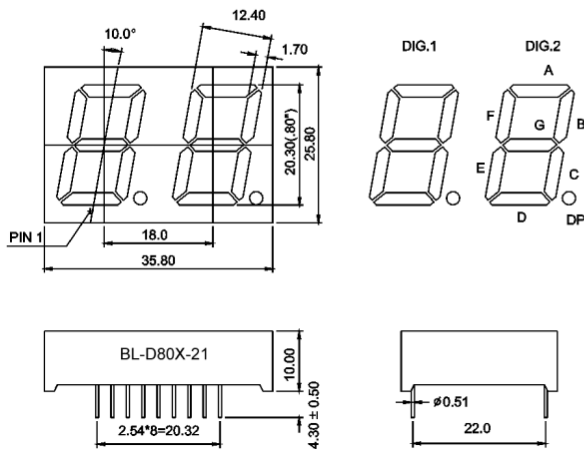


#### BL-D80C-21




#### BL-D80D-21



#### BL-D80E-21



#### BL-D80F-21




#### Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is  $\pm 0.25$  (0.01") unless otherwise noted.
3. Specifications are subject to change without notice.

# LED NUMERIC DISPLAY, 2 DIGIT

BL-D80X-21


## Typical electrical-optical characteristics curves:

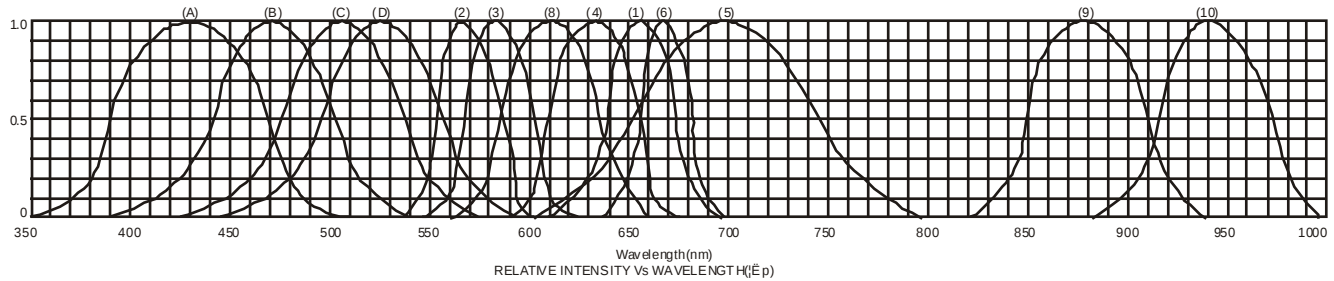


- |                                           |                                      |
|-------------------------------------------|--------------------------------------|
| (1) - GaAsP/GaAs 655nm/Red                | (9) - GaAlAs 880nm                   |
| (2) - GaP 570nm/Yellow Green              | (10) - GaAs/GaAs & GaAlAs/GaAs 940nm |
| (3) - GaAsP/GaP 585nm/Yellow              | (A) - GaN/SiC 430nm/Blue             |
| (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B) - InGaN/SiC 470nm/Blue           |
| (5) - GaP 700nm/Bright Red                | (C) - InGaN/SiC 505nm/Ultra Green    |
| (6) - GaAlAs/GaAs 660nm/Super Red         | (D) - InGaAl/SiC 525nm/Ultra Green   |
| (8) - GaAsP/GaP 610nm/Super Red           |                                      |




FORWARD VOLTAGE (Vf)  
FORWARD CURRENT VS.  
FORWARD VOLTAGE





FORWARD CURRENT (mA)  
RELATIVE LUMINOUS  
INTENSITY VS. FORWARD  
CURRENT

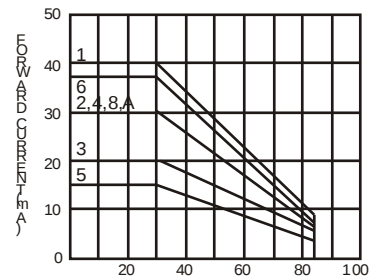

AMBIENT TEMPERATURE Ta( ° )  
FORWARD CURRENT VS. AMBIENT  
TEMPERATURE

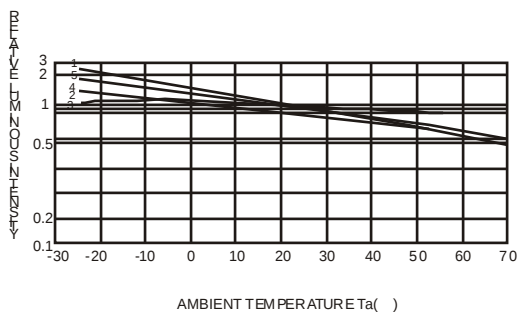

AMBIENT TEMPERATURE Ta( ° )

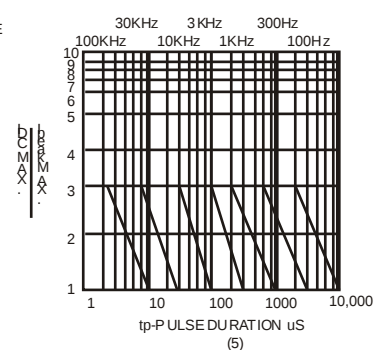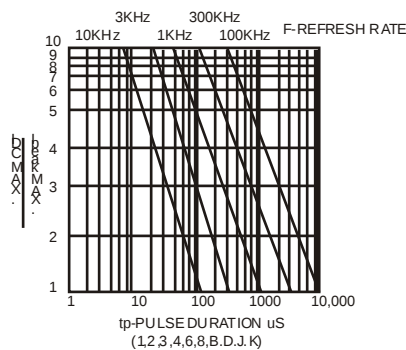

NOTE: 25 °C free air temperature unless otherwise specified

# LED NUMERIC DISPLAY, 2 DIGIT

BL-D80X-21

## Packing and weighting

