

FAST RECOVERY RECTIFIERS

VOLTAGE RANGE: 100 --- 1000 V
CURRENT: 5.0 A


FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC DO-27, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.041 ounces, 1.15 grams
- ◇ Mounting position: Any

DO - 27

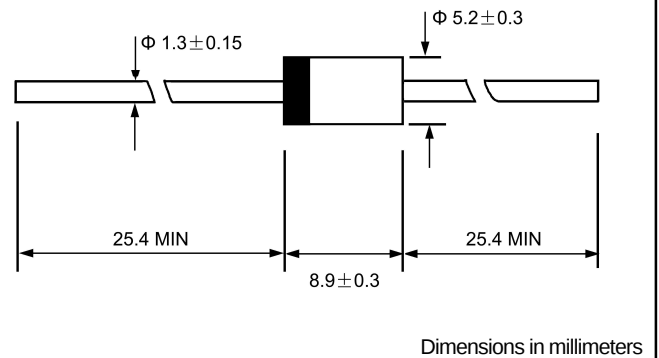

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.


		BY500 -100	BY500 -200	BY500 -400	BY500 -600	BY500 -800	BY500 -1000	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	100	200	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A = 75^\circ\text{C}$	$I_{F(AV)}$	5.0						A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J = 125^\circ\text{C}$	I_{FSM}	200.0						A
Maximum instantaneous forward voltage @ 5.0 A	V_F	1.3						V
Maximum reverse current @ $T_A = 25^\circ\text{C}$ at rated DC blocking voltage @ $T_A = 100^\circ\text{C}$	I_R	10.0 1000.0						μA
Maximum reverse recovery time (Note1)	t_{rr}	200						ns
Typical junction capacitance (Note2)	C_J	55						pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	15						$^\circ\text{C/W}$
Operating junction temperature range	T_J	-55 --- + 150						$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55 --- + 150						$^\circ\text{C}$

NOTE: 1. Measured with $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $t_{rr} = 0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

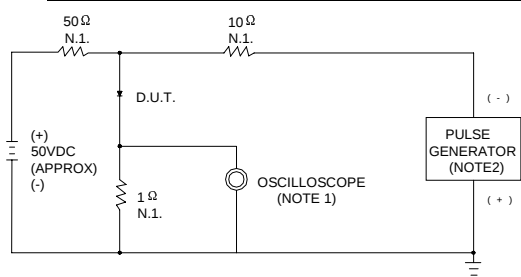

NOTES:1.RISE TIME=7ns MAX. INPUT IMPEDANCE=1MΩ, 22pF
2.RISE TIME=10ns MAX. SOURCE IMPEDANCE=50Ω

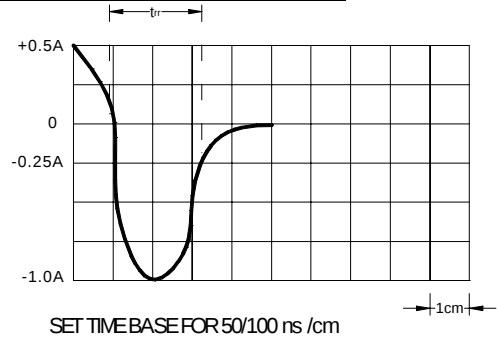


FIG.2 –FORWARD DERATING CURVE

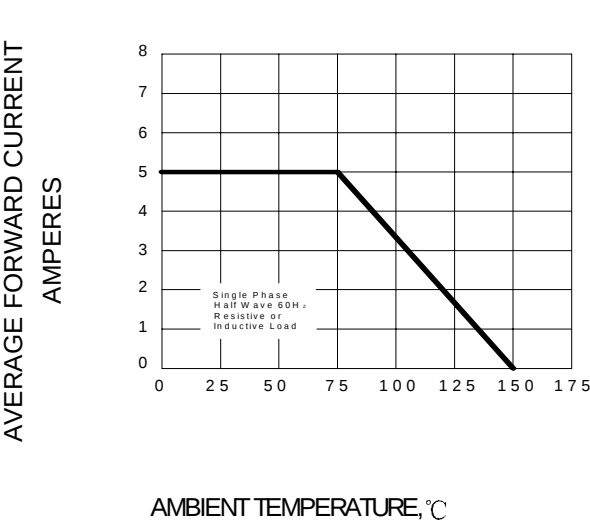


FIG.3 –PEAK FORWARD SURGE CURRENT

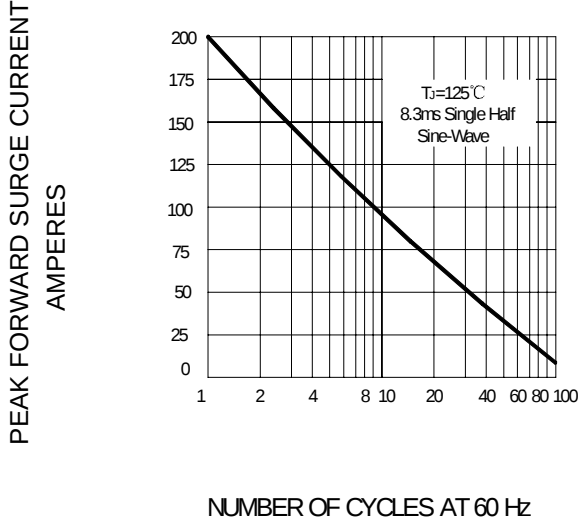


FIG.4–TYPICAL FORWARD CHARACTERISTIC

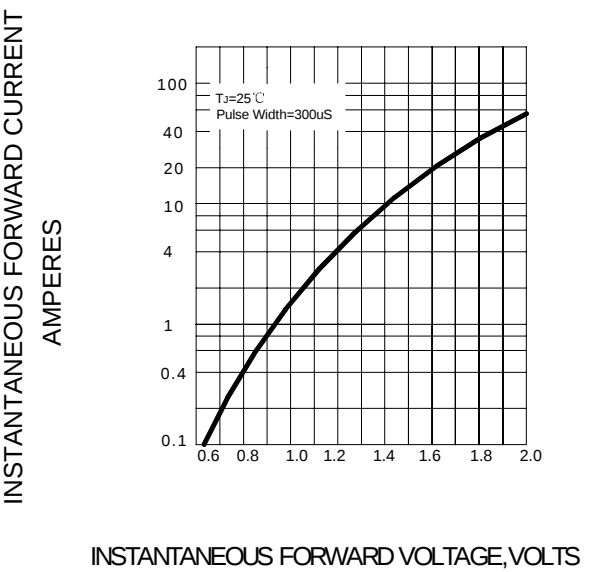


FIG.5– TYPICAL JUNCTION CAPACITANCE

