

CC112x TI-SIGFOX SDK Demo

Getting Started Guide



Literature Number: SWRU487
June 2016

Introduction

This user's guide is intended to help users set up and get started with the CC112x SIGFOX Demo application. This document explains how to acquire the hardware and software for the development kit. It also contains instructions on how to get the kit to communicate with the SIGFOX network.

1.1 Get a SIGFOX Device ID With Temporary Access

Send an email to: tech-p1-team@sigfox.com to request the activation-code extraction firmware. For this initial request, SIGFOX requires the following information:

- Full legal company name
- First and last name of employee being granted access to the SIGFOX network
- Country and state, or region where development work will occur
- Country, or countries of target product deployment

SIGFOX responds with a binary file called `TI_SIGFOX_activation_code_application.txt`. Follow the instructions in [Section 1.2](#).

1.2 Get the Hardware

The hardware is slightly different for the Americas and Europe.

To make a development kit for the Americas, order one of each of the following:

- MSP430F5529 LaunchPad™
 - <http://www.ti.com/tool/msp-exp430f5529lp>
- CC1120 CC1190 BoosterPack™
 - <http://www.ti.com/tool/TIDC-SIGFOX-CC1120-CC1190-BP>

To make a development kit for Europe, order one of each of the following:

- MSP430F5529 LaunchPad
 - <http://www.ti.com/tool/msp-exp430f5529lp>
- CC1125 BoosterPack
 - <http://www.ti.com/tool/boostxl-cc1125>

To make a development kit for Japan, order one of each of the following:

- MSP430F5529 LaunchPad
 - <http://www.ti.com/tool/msp-exp430f5529lp>
- CC1125 BoosterPack
 - <http://www.ti.com/tool/boostxl-cc1125>

1.3 Setup the Hardware

To assemble the kits for either FCC or ETSI/ARIB, simply connect the BoosterPack to the LaunchPad as shown in [Figure 1-1](#) and [Figure 1-2](#).

Figure 1-1. LaunchPad and BoosterPack Assemble for FCC SIGFOX Applications


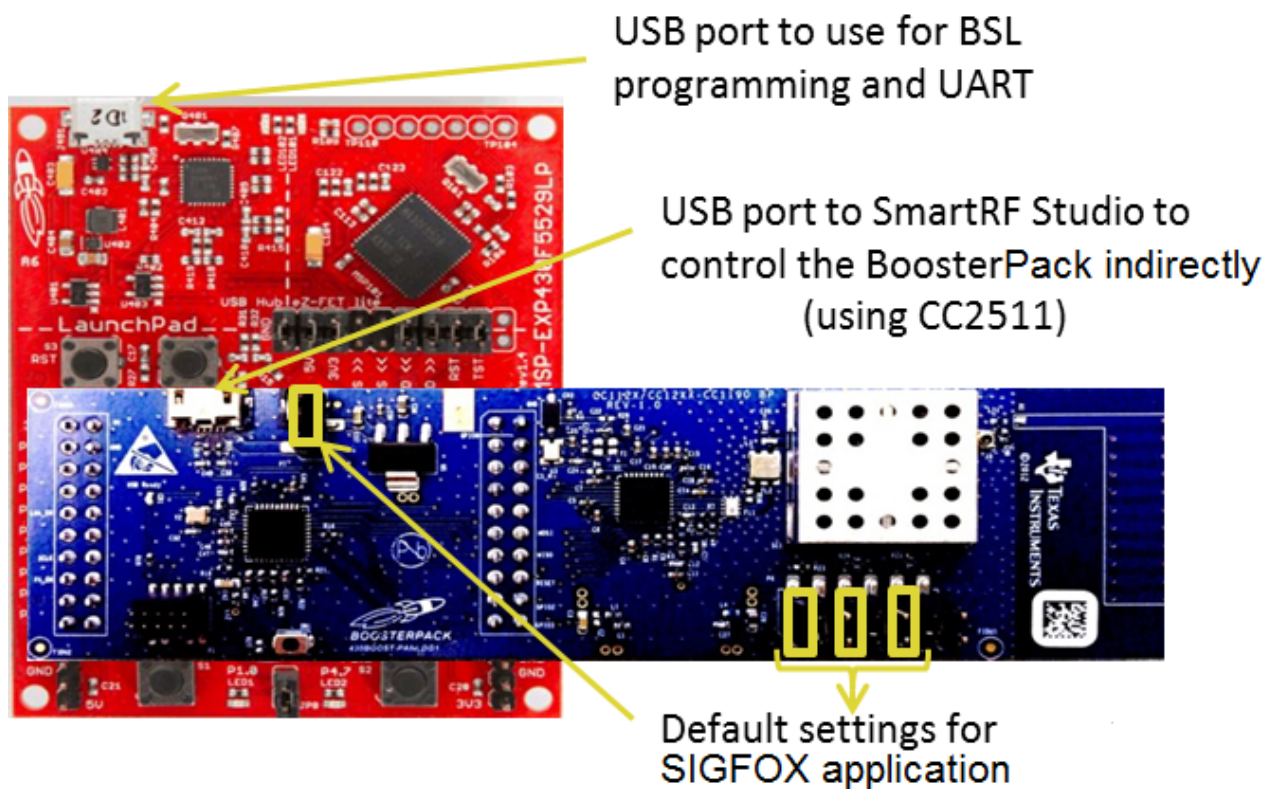


Figure 1-2. LaunchPad and BoosterPack Board Settings for ETSI/ARIB SIGFOX Applications

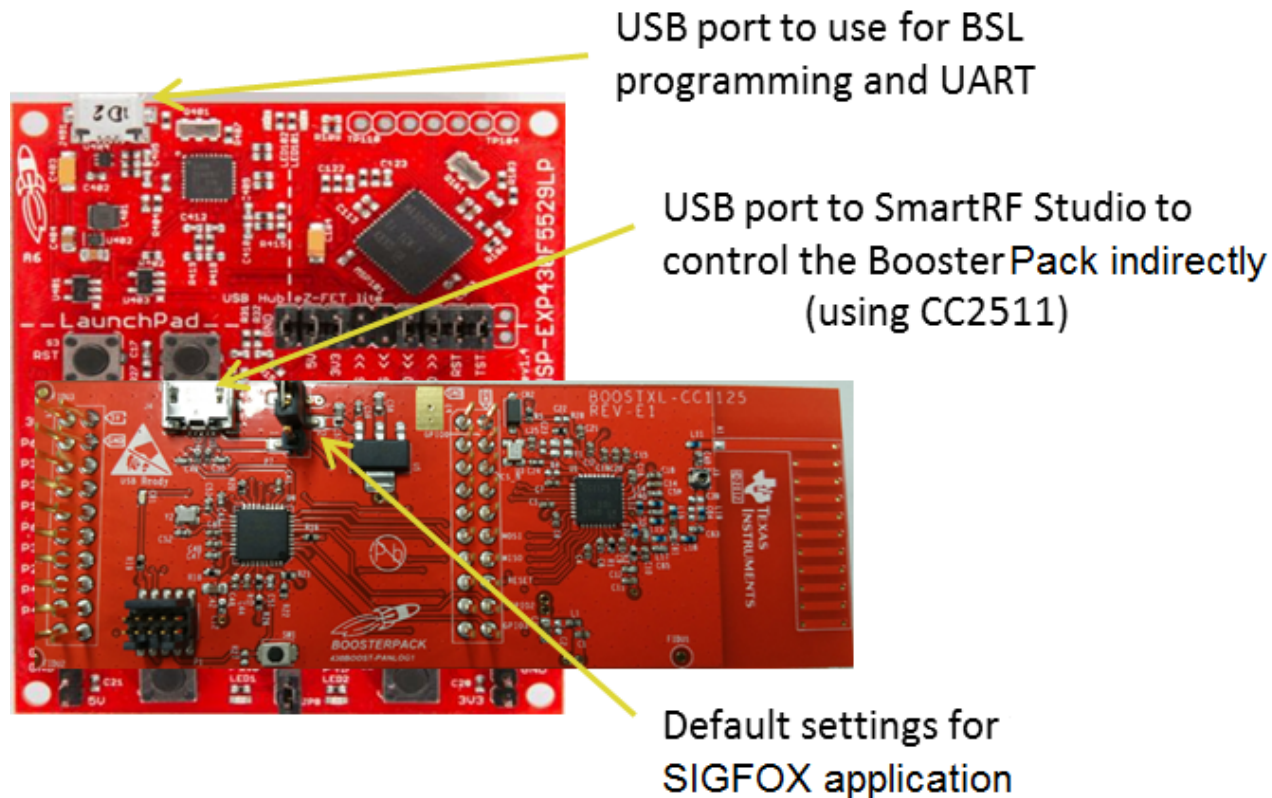


1.4 Extract Activation ID from LaunchPad

Download the image that reads the activation code from the LaunchPad and BoosterPack combo. The file is called TI_SIGFOX_activation_code_application.txt and is provided by SIGFOX as described in [Section 1.1](#). Then, flash the file to the LaunchPad. Each activation code is specific for a specific region of the world, which is why it is important to provide the location information to SIGFOX in the initial request.

The two ways to flash the LaunchPad follow. Flashing can be done using the SmartRF Flash programmer (<http://www.ti.com/tool/flash-programmer>, version 1 only). Rename the .txt file to a .hex file, and flash it using the SmartRF Flash programmer, as shown in [Figure 1-3](#).

Figure 1-3. SmartRF Flash Programmer Configuration Page Settings

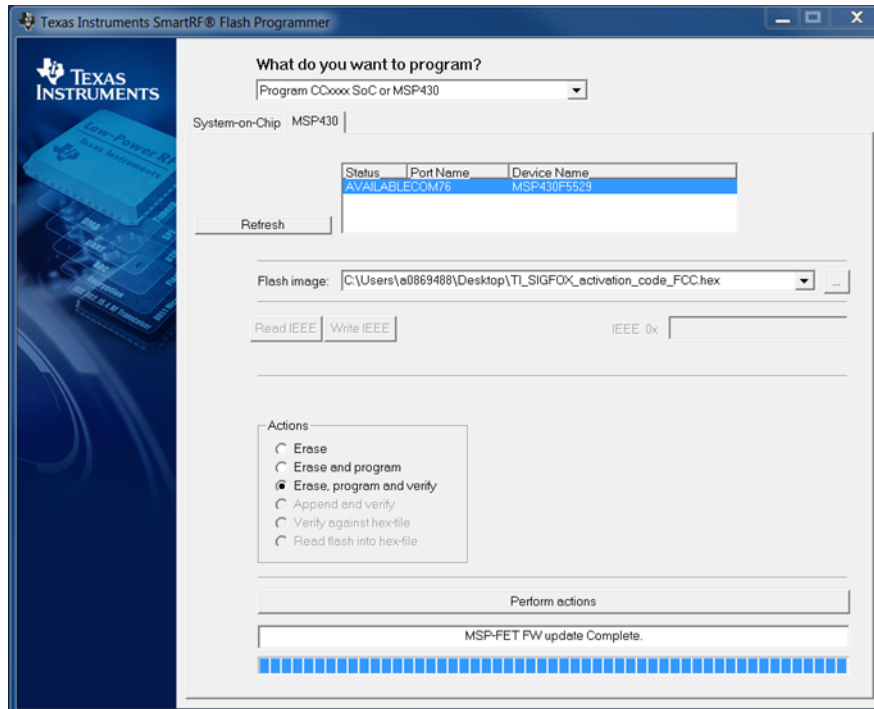


The alternative way to flash is by using the MSP430™ Flasher application.

1. Download and install the application from <http://www.ti.com/tool/msp430-flasher>.
2. Using the command prompt, execute the following commands from the correct folder.


```
> MSP430Flasher -w ".\TI_SIGFOX_activation_code_FCC.txt" -v -g -z [VCC]
```
3. If using a Linux® computer, set the path for the executable before executing the flash command.

```
> export LD_LIBRARY_PATH=~/.MSP430Flasher_1.3.7/
```
4. Connect to the LaunchPad using a terminal program.
5. Download and install your favorite terminal program. We have tested Coolterm (<http://freeware.the-meiers.org/>) and TeraTerm (<http://logmett.com/tera-term-the-latest-version>).
6. Identify the UART port number using the device manager, as shown in Figure 1-4.


Figure 1-4. Identifying Applications UART Port Number

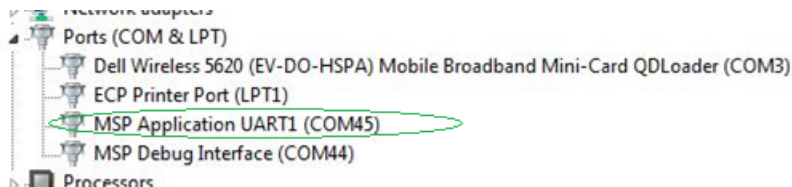

7. Set up the serial port that is identified by MSP Application UART1 (see Figure 1-5).

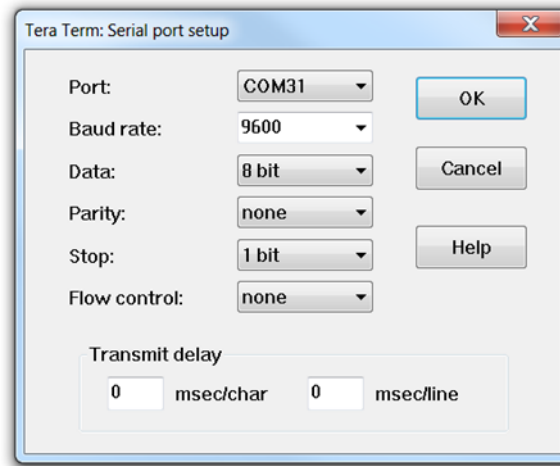Figure 1-5. UART Serial Port Setup


8. Enable local echo on the terminal to see the characters that are typed on the terminal (see [Figure 1-6](#)).

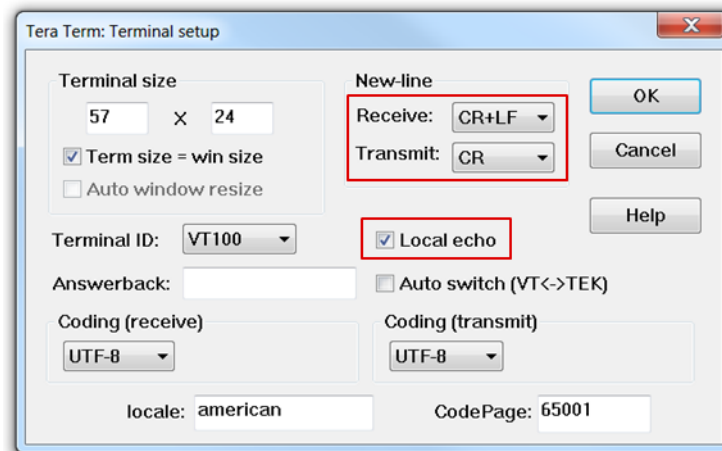Figure 1-6. UART Terminal Setup


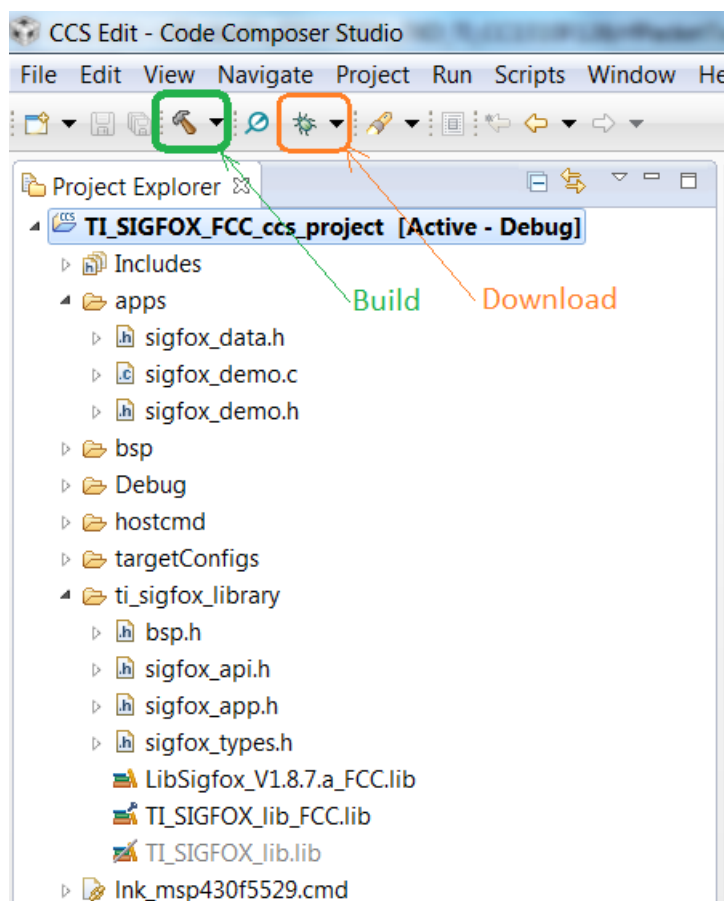
9. Once the terminal set up is complete, connect the LaunchPad to the PC using the USB connector. The BoosterPack remains unconnected to PC.
10. Once the connection with the device is established, press ENTER. Then, the following message should appear:

```
!!! Launchpad and Boosterpack boards must be fit together!!!
Press Enter to get your device's numbers:
```
11. Press ENTER again to retrieve the 20-digit activation code in this format: 6BAE144709AA12004823.
12. If the HEX identifies that you are trying to extract an ID from an incorrect combination of devices it returns: "Not a VALID Board for TI-SIGFOX project". In this case, check the hardware setup and try again.
13. Send a second email to: tech-p1-team@sigfox.com to request access to the full project by supplying the activation code that was extracted from the hardware. SIGFOX responds to the request by creating a unique development project that has been targeted for the unique MSP430 and CC112x device combination. This process can take up to 24 hours.
14. If not already installed, then install Code Composer 6, by going to this [link](#). The installation must be Version 6.1.0.00104 or later, and ensure to select the MSP Ultra Low Power MCUs option for processor support.

1.5 CCS Project

Open the TI_SIGFOX_project into the CCS application; this is a MSP430 application using the radio on the BoosterPack. Compile the project, load it onto the LaunchPad, and run it. Once the project is running, the device is ready to send and receive packets to the SIGFOX network. The device is expected to be within range of a SIGFOX base station. The device accepts instructions from the user using AT commands. [Figure 1-7](#) shows the Code Composer build and download buttons.

Figure 1-7. Code Composer Build and Download Buttons



SIGFOX Backend

2.1 What is Backend?

SIGFOX backend is a web portal that gives users access to manage devices and data on the SIGFOX network. Users can log in to the backend to add and access their devices. <https://backend.sigfox.com/>.


2.2 Adding a User Device to Backend

The device ID and PAC number are required to add a device to the backend. This information can be obtained using AT commands through the terminal. Press ENTER after every command.

- To obtain the device ID, type command: AT\$ID?
- To obtain the device PAC, type command: AT\$PAC?

To add a device to the backend, login to the SIGFOX backend, click on Device, and then click New, in the top right corner of the browser. Now add the new device by filling out the form. Figure 2-1 shows how to add a new device to the SIGFOX backend.

Figure 2-1. Add New Device to SIGFOX Backend

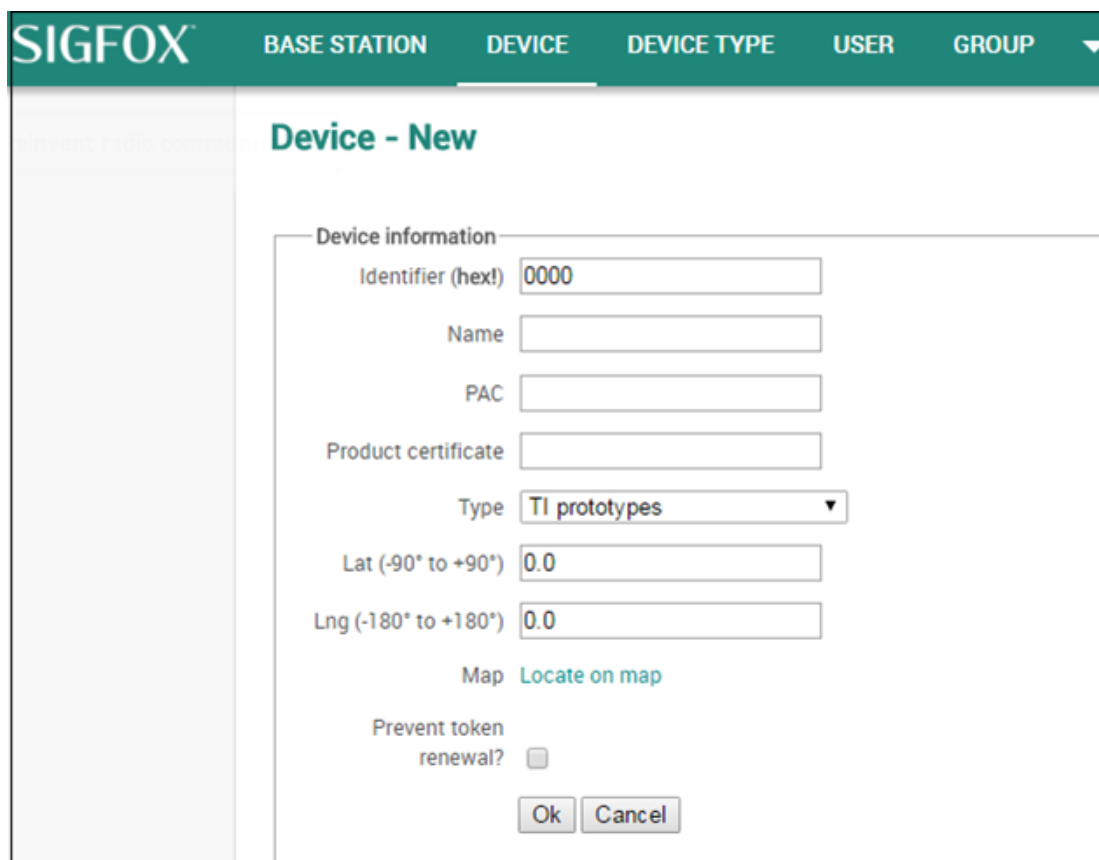

SIGFOX BASE STATION **DEVICE** DEVICE TYPE USER GROUP ▼

Device - New

Device information

Identifier (hex!)

Name

PAC

Product certificate

Type

Lat (-90° to +90°)

Lng (-180° to +180°)

Map [Locate on map](#)

Prevent token renewal? ☐

2.3 Communicating With the SIGFOX Base Station

Data can be sent and received from the closest SIGFOX base station using AT commands. To send one bit of data, use command AT\$SB=0/1. To send a frame of data, use command AT\$SF=<payload data>. Payload data is a hexadecimal number with even bytes. Example: 123abc.

Once the command is issued, a packet is transmitted three times at three different frequencies, to increase the chances of reception. [Figure 2-2](#) shows the spectrum at the base station.


Figure 2-2. Spectrum at the Base Station

Base station OCFE - Spectrum

Units

Spectrum: ↓ RSSI (dBm), ↔ Frequency (MHz)

Waterfall: ↓ Seconds (s), ↔ Frequency (MHz)

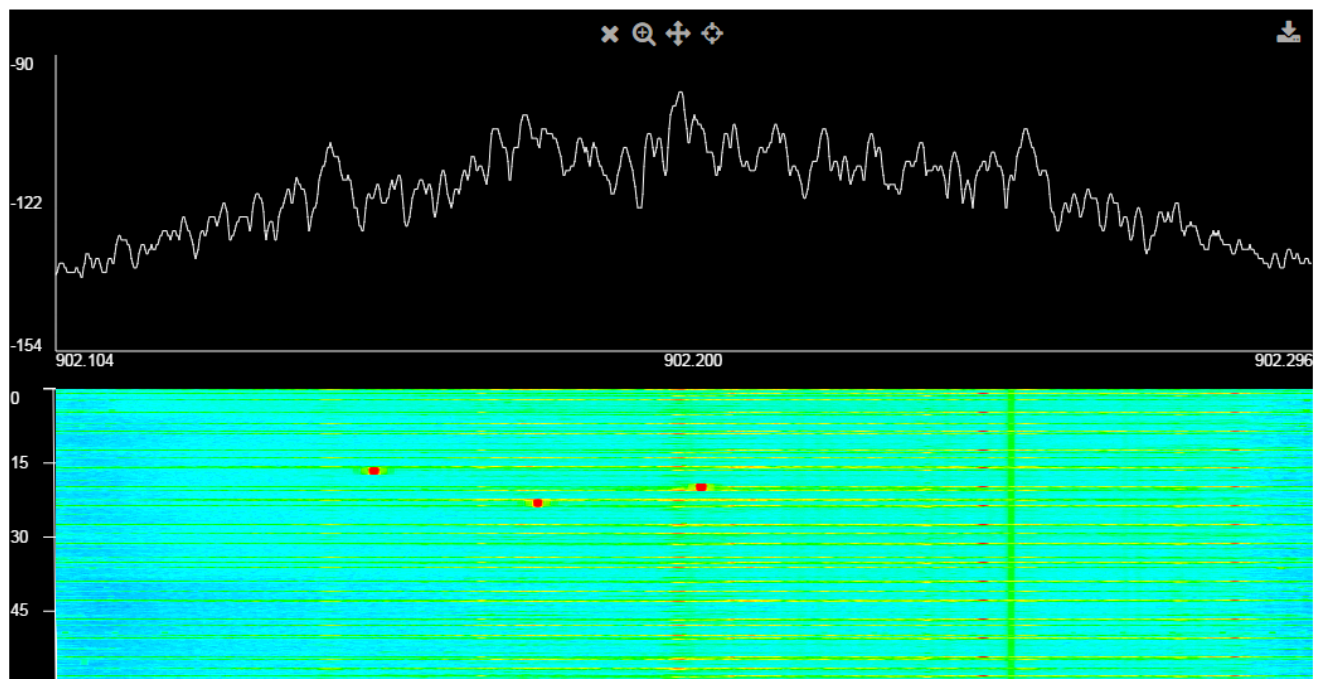

NOTE: After flashing or resetting any device connected to the SIGFOX network, users must press Disengage Sequence Number button, on the Device or Device Type page, in the SIGFOX backend. The sequence number is a security measure, which prevents device spoofing by verifying that an incremental sequence number is generated by the device each time it transmits to the network. This number is reset each time the device is flashed. Without disengaging the sequence number on the backend, no messages can be received.

2.4 Retrieving Messages From the Base Station

To check the message received at the base station from your device, perform the following steps.

1. Click on the Device tab.
2. Select your Device ID.
3. Select the Messages button.

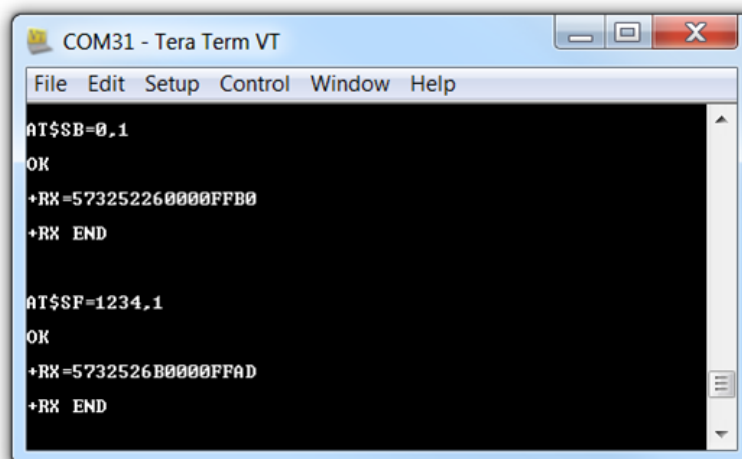
[Figure 2-3](#) shows examples of messages on the base station.

Figure 2-3. Messages on the Base Station

Time	Delay (s)	Header	Data / Decoding	Location	Base station	RSSI (dBm)	SNR (dB)	Freq (MHz)	Rep	Calibrates
2016-05-10 21:28:14	3.4	0010	09e40c1c0cfa0013 Temp: 25.0 °C VDD idle: 3.300 V VDD tx: 3.100 V RSSI: -81.0		0CFE	-88.00	23.06	902.2590	1	
2016-05-10 21:27:39	3.2	0000 ack required	1234		0CFE	-83.00	23.80	902.2186	3	
2016-05-10 21:27:05	2.8	0010	09e40c1c0cfa000f Temp: 25.0 °C VDD idle: 3.300 V VDD tx: 3.100 V RSSI: -85.0		0CFE	-84.00	27.02	902.1738	1	
2016-05-10 21:26:30	2.1	0000 ack required	00		0CFE	-80.00	29.11	902.1739	3	

2.5 Sending Bidirectional Messages

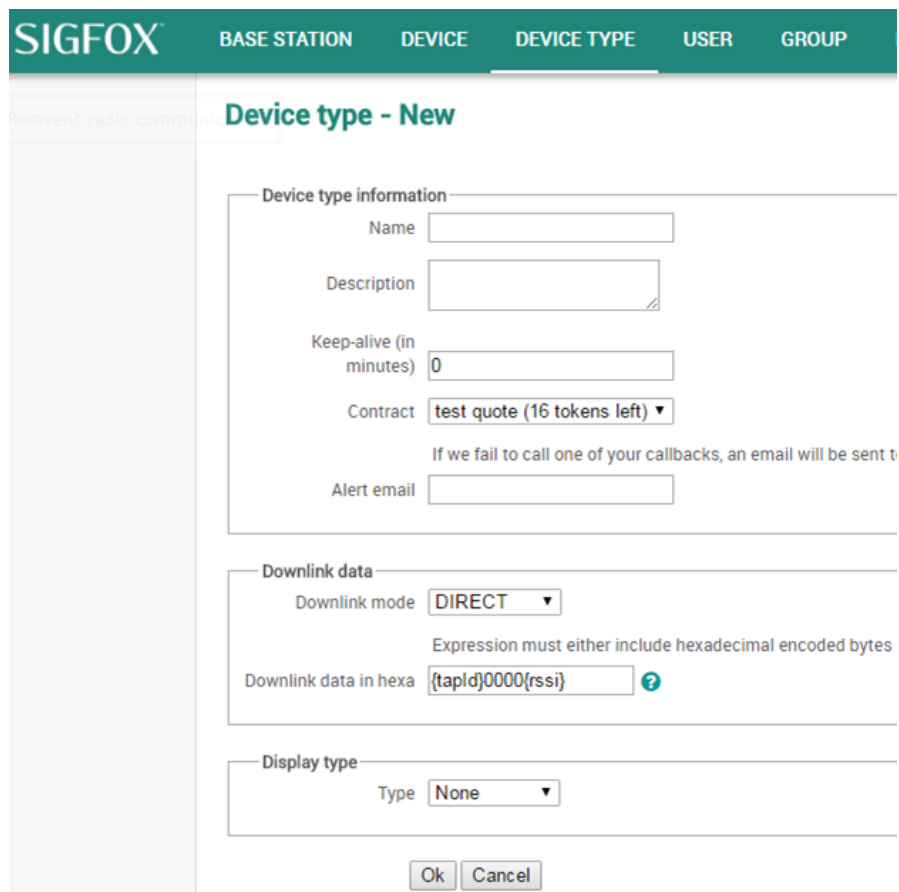
Using AT\$SB or AT\$SF with a second argument set to 1 initiates a bidirectional message. The response from the base station is printed on the terminal. [Figure 2-4](#) shows the bidirectional message.

Figure 2-4. Bidirectional Message


2.6 Creating Device Type

Creating a device type in the backend lets users to group a set of devices, and manage the base station as desired. To add a new device type, perform the following steps.

1. Click the Device Type tab.
2. Click the New button in the top right corner.
3. Choose the group, and fill out the form that appears (see [Figure 2-5](#)).

Figure 2-5. New Device Type Setup


SIGFOX BASE STATION DEVICE **DEVICE TYPE** USER GROUP

Reinvent radio communication

Device type - New

Device type information

Name

Description

Keep-alive (in minutes)

Contract **test quote (16 tokens left)** ▼

If we fail to call one of your callbacks, an email will be sent to

Alert email

Downlink data

Downlink mode **DIRECT** ▼

Expression must either include hexadecimal encoded bytes

Downlink data in hexa ?

Display type

Type **None** ▼

Ok Cancel

2.7 Associate a Device to a Device Type

To associate the device to a device type, perform the following steps.

1. Click on the Device tab.
2. Click on the ID of the device.
3. Click the Edit button, and select the device type from the drop-down list, then click OK (see [Figure 2-6](#)).

Figure 2-6. Add a Device to a Device Type



The screenshot shows the Sigfox web interface with the 'DEVICE TYPE' tab selected. The main content area displays the 'Device 18A5F9 - Edition' form. The form includes fields for Identifier (hex!), Name, PAC, Product certificate, Type (dropdown), Lat, Lng, Map, and Prevent token renewal. The 'Type' dropdown menu is highlighted with a green box and contains the value 'TestPS'.


2.8 Changing the Downlink Message

Once the device is associated with a device type, users can modify the downlink message for a device type. Perform the following steps.

1. Click on the Device Type tab.
2. Select the device type.
3. Click the Edit button in the top right corner.
4. Modify the downlink data in hexa to change the downlink message.
5. Send a bidirectional message using the command `AT$SF=<payload data>,1`.

Figure 2-7 shows the field where downlink data can be modified.


Figure 2-7. Downlink Data



The screenshot shows the 'Downlink data in hexa' field in the Sigfox web interface. The field contains the text 'abcd12345678{rssi}' and a help icon. A tooltip above the field explains the syntax for hexadecimal encoded bytes and variables.

Figure 2-8 shows the modified downlink received data.

Figure 2-8. Downlink Received Data

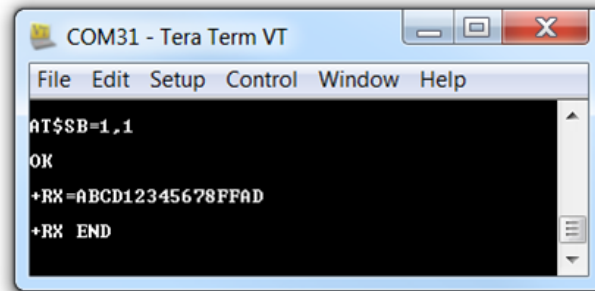

2.9 Adding Custom Callbacks

Users can create a callback for a device type. A callback defines how the base station should respond to devices from a device type. Callbacks are triggered when a new device message is received, or device communication loss is detected. A set of available variables are replaced by their value when a callback is called. More information can be found here: <https://backend.sigfox.com/apidocs/callback>.

To add a new callback, perform the following steps.

1. Click the Device Type tab.
2. Select the Device type.
3. Click the Callbacks button.
4. Click the New button.
5. Click the Custom Callbacks button.

Figure 2-9 shows adding a callback that sends out an email when an uplink message is received from a device.

Figure 2-9. Add a Callback for a Device Type

Device type **- Callback edition**

Callbacks

Type: DATA UPLINK

Channel: EMAIL

Send duplicate: ☐

Recipient:

Subject syntax: Subject with device {device}
 Message syntax: Message containing time {time}, key1 {var1}, key2 {var2}...
 Available variables: device, time, duplicate, signal, station, data, avgSignal, lat, lng, rssi

Subject:

Message:

AT Commands

ATtention (AT) commands are instructions used to control a modem. Every command starts with AT, and is case sensitive. Figure 3-1 lists the structure of the AT commands.

Figure 3-1. AT Command Structure

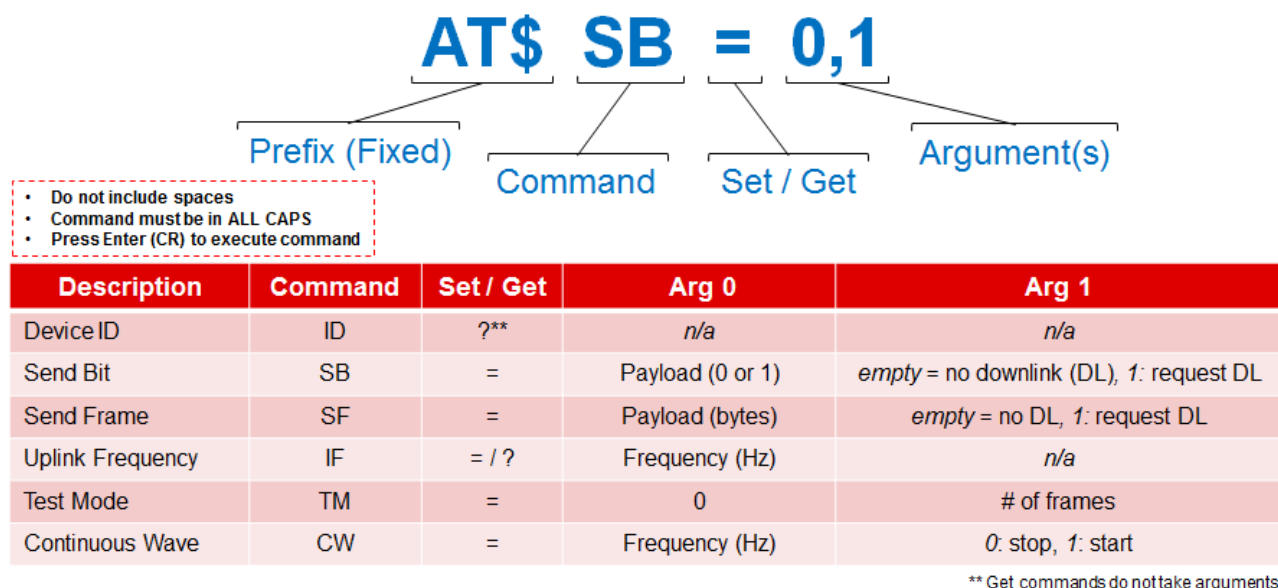


Table 3-1 lists the available AT commands and their usage.

Table 3-1. List of AT Commands

Task	Command and Response	Parameter Description
Send bit status	CMD: AT\$SB=<stat_val><CR> RESP: OK<CR>	<stat_val>: status value 1/0 <dl_data>: 8 bytes of downlink message ⁽¹⁾
Send bit status with downlink request	CMD: AT\$SB=<stat_val>,1<CR> RESP: OK<CR> +RX=<dl_data><CR> +RX END<CR>	
Send payload (in bytes)	CMD: AT\$SF=<ul_data><CR> RESP: OK<CR>	<ul_data>: 0 to 12 bytes of uplink message ⁽¹⁾
Send payload with downlink request	CMD: AT\$SF=<ul_data>,1<CR> RESP: OK<CR> +RX=<dl_data><CR> +RX END<CR>	<dl_data>: 8 bytes of downlink message ⁽¹⁾
Get device id	CMD: AT\$ID?<CR> RESP: <dev_id><CR>	<dev_id>: device ID

⁽¹⁾ ASCII coded HEX value

Table 3-1. List of AT Commands (continued)

Task	Command and Response	Parameter Description
Get uplink frequency	CMD: AT\$IF?<CR> RESP: <ul_freq><CR>	<ul_freq>: central uplink frequency (Hz)
Set uplink frequency ⁽²⁾	CMD: AT\$IF=<ul_freq><CR> RESP: OK<CR>	
Get downlink frequency	CMD: AT\$DR?<CR> RESP: <dl_freq><CR>	<dl_freq>: central downlink frequency (Hz)
Set downlink frequency ⁽²⁾	CMD: AT\$DR=<dl_freq><CR> RESP: OK<CR>	
TX test mode ⁽³⁾	CMD: AT\$ST=<count>,<ch><CR> RESP: OK<CR>	<count>: number of random 12-byte messages to send in test mode. 0 to 32767, or –1 for infinite packet TX. <ch>: channel for uplink. 0 to 480 or –1 for channel hopping
RX test mode ^{(3), (4)}	CMD: AT\$SR=<seq_num>,<ch>,<rxtout><CR> RESP: RX=<msg1><CR> RSSI=<rssi_val1><CR> ... RX=<msgN><CR> RSSI=<rssi_valN><CR>	<seq_num>: downlink message sequence number. <ch>: channel for downlink message. 0 to 480. <rxtout>: number seconds for RX time window. Automatically time out RX after this. for X count, <msgX>: 8 bytes of downlink data. ⁽¹⁾ <rssi_valX>: rssi value
TX continuous wave mode ⁽³⁾	CMD: AT\$CW=<freq>,<mode><CR> RESP: OK<CR>	<freq>: frequency for CW mode (Hz) <mode>: 1 to start CW mode and 0 to stop CW mode

⁽²⁾ If the uplink or downlink frequency value is not set to the correct value, use this function to set the correct frequency value.

⁽³⁾ Test mode function.

⁽⁴⁾ A special tool is required to emulate a downlink message from a base station.

Each AT command and response is terminated with a carriage return <CR>. All the commands are case sensitive. There are no spaces between the characters or fields of these commands.

Acronyms

- ADMIN - Administrator
- CCS - Code Composer Studio
- CMD - Command
- CR - Carriage Return (0x0D)
- HEX - Hexadecimal Value
- LNA - Low-Noise Amplifier
- OOB - Out of Band
- PA - Power Amplifier
- RESP - Response
- RX - Receive
- TCXO - Temperature Controlled crystal (XTAL) Oscillator
- TX - Transmit
- XTAL - Crystal Oscillator

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com