

Generation 2

CHM-14-XH20 LED

High Density White

COB Array




Table of Contents

Technology Overview	2
Test Specifications	2
Chromaticity Bins	3
Product Ordering & Shipping Part Numbers	4
Ordering Part Numbers.	5
Operating Characteristics	6
Optical and Electrical Character- istics	7
Spectra	8
Mechanical Dimensions	9
Handling Notes	10

Features:

- High lumen output, density
 - Over 8,000 lumens, @ 3000K, 80 CRI, Tj=85°C
 - Over 7,000 lumens per square centimeter of Light Emitting Surface (LES)
 - Center beam candle power with 75mm reflector and 10° beam > 65W CDM lamp
- CCT 2700K, 3000K, 3500K, 4000K, 5000K and 6500K
- CRI in 80 for all colors, 70 and 90 for most other colors
- R9 up to 90 min. CRI 98 typical in 2700K, 3000K, 3500K and 4000K
- 3 SDCM color binning accuracy
- Excellent optical emission uniformity and color over angle consistency
- Exceptional long term color stability
- Package thermal conductivity more than twice the industry average
- Environmentally friendly: RoHS and REACH compliant
- 

Applications

- | | |
|---------------------------|-------------------------------|
| • Spotlights/Track Lights | • Hospitality Lighting |
| • Downlights | • Architectural and Specialty |
| • Shop Lighting | • Metal Halide Replacement |

Technology Overview

Luminus Chip-on-Board (COB) LED series offers a complete lighting class solution designed for high performance illumination applications. The selection covers a wide lumen range from less than 400lm to over 25,000lm, all major color temperatures and can deliver color rendering greater than 95 at 2700K and 3000K and R9 greater than 90. These breakthroughs allow illumination engineers and designers to develop beautifully lit spaces without sacrificing efficacy, brightness and overall quality.

Reliability

Designed from the ground up, the Luminus COB LED is one of the most reliable light sources in the world today. Having passed a rigorous suite of environmental and mechanical stress tests, including mechanical shock, vibration, temperature cycling and humidity. Only then are the devices qualified for use in a wide range of lighting application including some of the most demanding commercial applications. Delivered with fully qualified LM80 test data and TM21 lifetime results that certify lumen maintenance at 35,000 hours or more, Luminus COB LEDs are ready for the toughest challenges.

UL Recognized Compliance

Luminus COB arrays are tested in accordance with ANSI/UL 8750 to ensure safe operation for their intended applications.

REACH & RoHS Compliance

All LED products manufactured by Luminus are REACH and RoHS compliant and free of hazardous materials, including lead and mercury.

Understanding Luminus COB LED Test Specifications

Every Luminus LED is fully tested to ensure it meets the high quality standards customers have come to expect from Luminus' products.

Traceability

Each Luminus COB LED is marked with a 2D bar code that contains a unique serial number. With this serial number, Luminus has the ability to provide customers with actual test data measurements for a specific LED. In addition, the 2D bar code is linked to manufacturing date codes that enables traceability of production processes and materials.

Chromaticity Bin Range

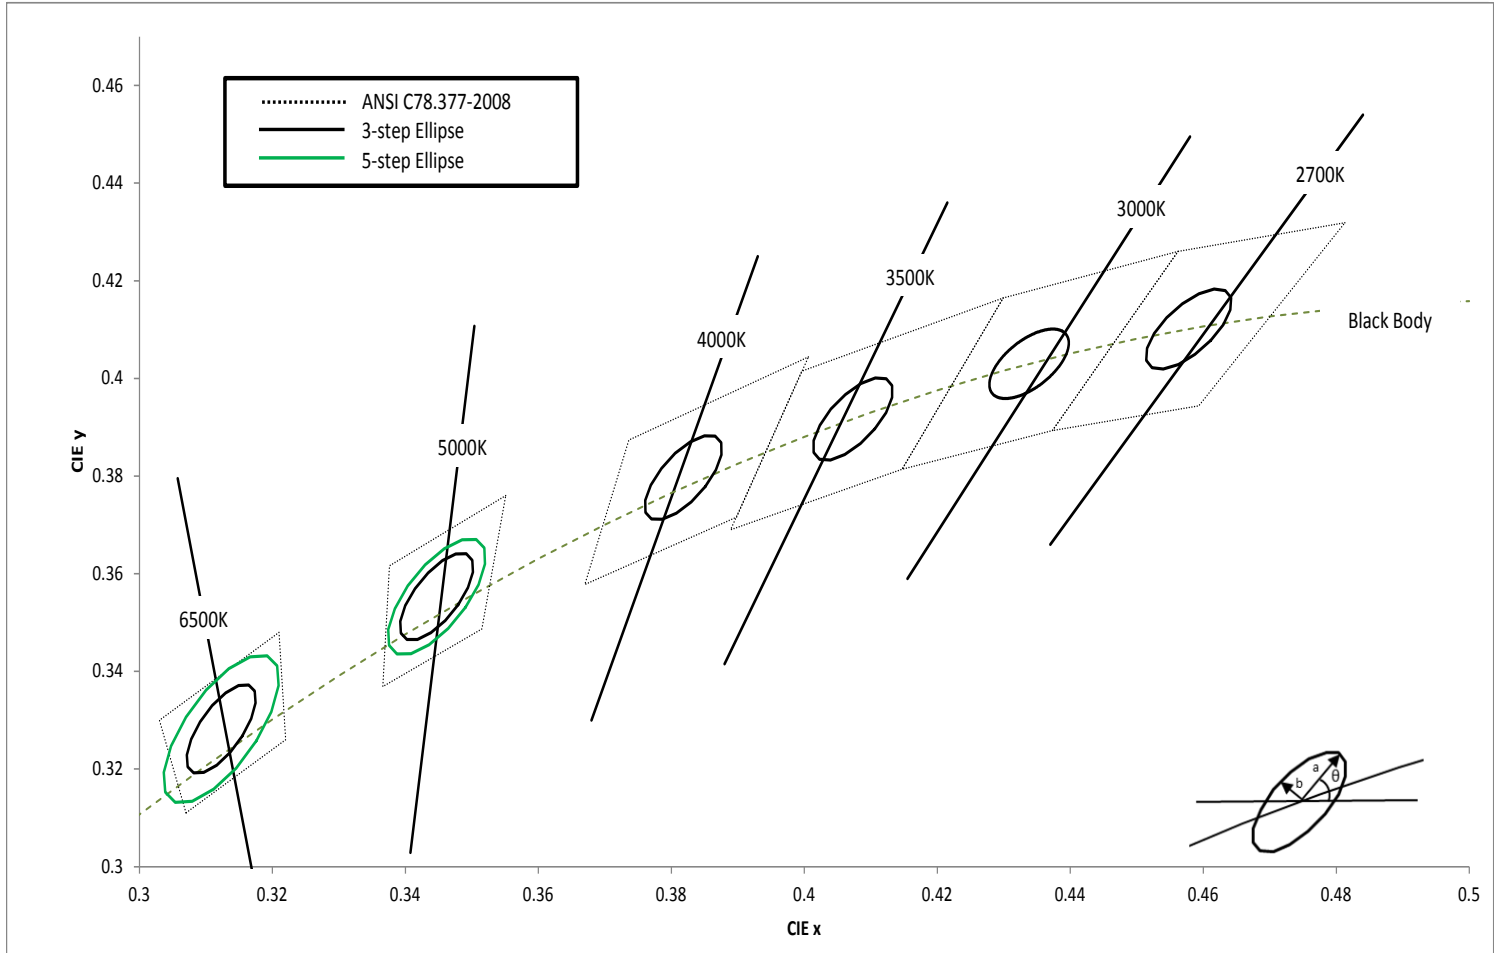
Chromaticity binning delivers color consistency for every order. Standard products are delivered with a 3-step MacAdam ellipse. This ensures color performance matching in the application. For the most demanding application, Luminus is one of only a few companies that can provide a 2-step ellipse bin. These tightly controlled, small distribution bins provide customers predictable, repeatable colors.

Testing Temperature

Luminus COB products are measured at temperatures typical for the LED operating in the fixture. Each device is tested at 85°C junction temperature eliminating the need to scale data sheet specifications to real world situations.

Chromaticity Bin Structure

Chromaticity Bins: 1931 CIE Curve



CHM-14-XH20 White Chromaticity Bins

The following tables describe the ANSI bin center points, the orientation angle for the MacAdam ellipse (θ°), and the maximum radii for the ellipses. The ANSI Bin is provided for reference.

CCT	Center Point		Angle θ°	3-step Bin		5-step Bin	
	CIE _x	CIE _y		a	b	a	b
2700K	0.4578	0.4101	53.7	0.0081	0.0042		
3000K	0.4338	0.403	53.2	0.00834	0.00408		
3500K	0.4073	0.3917	54	0.00927	0.00414		
4000K	0.3818	0.3797	53.7	0.00939	0.00402		
5000K	0.3447	0.3553	59.6	0.00822	0.00354	0.0137	0.0059
6500K	0.3123	0.3282	58.57	0.00669	0.00285	0.01115	0.00475

*Note: Luminus maintains a +/- 0.005 tolerance on chromaticity (CIE_x and CIE_y) measurements.

Product Ordering and Shipping Part Number Nomenclature

All CHM-14 products are packaged and labeled with part numbers as outlined in the table on page 5. When shipped, each package will contain only a single flux and chromaticity bin. The part number designation is as follows:

CHM — 14 — NN — XX — 36 — QQPP — FG — W

Product Family	Light Emitting Surface Diameter	Color Temperature	Color Rendering Index (CRI)	Voltage (typical)	Package Configurator	Flux Bin	Chromaticity Bin
CHM: Chip on Board, High Density, Multi-die	LES Diameter (mm)	Color See Note 1 below	CRI	Volts	XH20	Lumens	See page 3 for bins

Note 1: NN nomenclature corresponds to the following:

27 = 2700K
 30 = 3000K
 35 = 3500K
 40 = 4000K
 50 = 5000K
 65 = 6500K

Color Temperature, CRI and R9 Values

Color Temperatures	XX Value	CRI	R9
4000K, 5000K, 6500K	70	>70	-
2700K, 3000K, 3500K, 4000K, 5000K, 6500K	80	>80	>0
2700K, 3000K, 3500K, 4000K, 5000K	90	>90	>50
2700K, 3000K	95	>95	>90
3500K, 4000K			>75

Note: Luminus part numbers may be accompanied by prefixes or suffixes. The most common is the "Rev01" suffix indicating a part is fully released and carries a full warranty. These additional characters may appear on shipping labels, packing slips and invoices. In all cases the basic part number described above will always be included.

CHM-14-XH20 Part Numbers

The following tables describe products with typical flux and minimum flux measured at 1750mA and specified at Tj = 85°C. The values at 25°C are calculated and shown for reference only.

CCT	Output Flux (lm)		Reference	Color Rendering Index	Ordering Part Number
	Typ. (85°C)	Min. (85°C)	Typ. (calculated) (25°C)	CRI (min.)	3-step MacAdam Ellipse
2700K	7,600	7,070	8,200	80	CHM-14-27-80-36-XH20-F3-3
	6,265	5,830	6,760	90	CHM-14-27-90-36-XH20-F3-3
	5,990	5,570	6,465	95	CHM-14-27-95-36-XH20-F3-3
3000K	8,030	7,470	8,665	80	CHM-14-30-80-36-XH20-F3-3
	6,755	6,285	7,290	90	CHM-14-30-90-36-XH20-F3-3
	6,310	5,870	6,810	95	CHM-14-30-95-36-XH20-F3-3
3500K	8,270	7,695	8,925	80	CHM-14-35-80-36-XH20-F3-3
	6,890	6,410	7,435	90	CHM-14-35-90-36-XH20-F3-3
	6,590	6,130	7,110	95	CHM-14-35-95-36-XH20-F3-3
4000K	8,985	8,360	9,695	70	CHM-14-40-70-36-XH20-F3-3
	8,380	7,795	9,040	80	CHM-14-40-80-36-XH20-F3-3
	7,265	6,760	7,840	90	CHM-14-40-90-36-XH20-F3-3
	6,745	6,275	7,280	95	CHM-14-40-95-36-XH20-F3-3

CCT	Output Flux (lm)		Reference	Color Rendering Index	Part Number	
	Typ. (85°C)	Min. (85°C)	Typ. (calculated) (25°C)	CRI (min.)	5-step MacAdam Ellipse	3-step MacAdam Ellipse
5000K	9,135	8,500	9,855	70	CHM-14-50-70-36-XH20-F3-5	CHM-14-50-70-36-XH20-F3-3
	8,435	7,845	9,100	80	CHM-14-50-80-36-XH20-F3-5	CHM-14-50-80-36-XH20-F3-3
	7,305	6,795	7,880	90	CHM-14-50-90-36-XH20-F3-5	CHM-14-50-90-36-XH20-F3-3
6500K	9,145	8,505	9,865	70	CHM-14-65-70-36-XH20-F3-5	CHM-14-65-70-36-XH20-F3-3
	8,405	7,820	9,070	80	CHM-14-65-80-36-XH20-F3-5	CHM-14-65-80-36-XH20-F3-3

*Note: Luminus maintains a +/- 6% tolerance on flux measurements, a +/- 2% tolerance on CRI measurements, and a +/- 5% tolerance of R9

CHM-14-XH20 Operating Characteristics¹**Optical and Electrical Characteristics**

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Forward Current ²	I_f		1,750	2,625	mA
Forward Voltage ³	V_f	35.2	37.1	39	V
Power			65	104	W
Operating Case Temperature ⁴	T_c			105	°C
Light Emitting Surface Diameter	LES		13.5		mm
Thermal Resistance (junction-to-case)	Θ_{jc}		0.18		°C/W
Junction Temperature	T_j			140	°C
Viewing Angle			120		Degree

Note 1: Ratings are based on operation at a constant junction temperature of $T_j = 85^\circ\text{C}$.

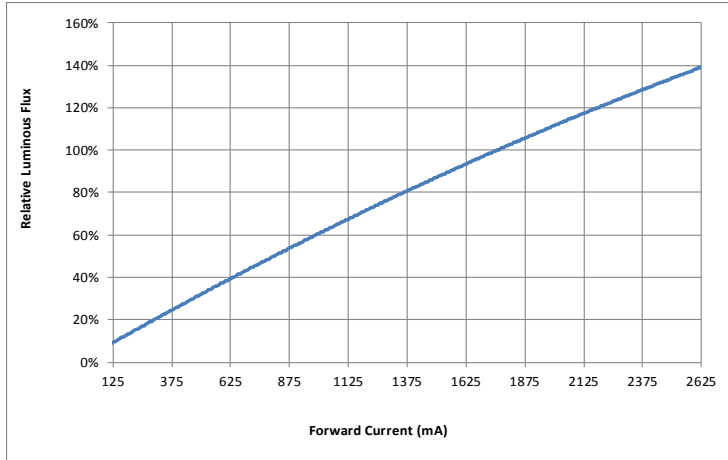
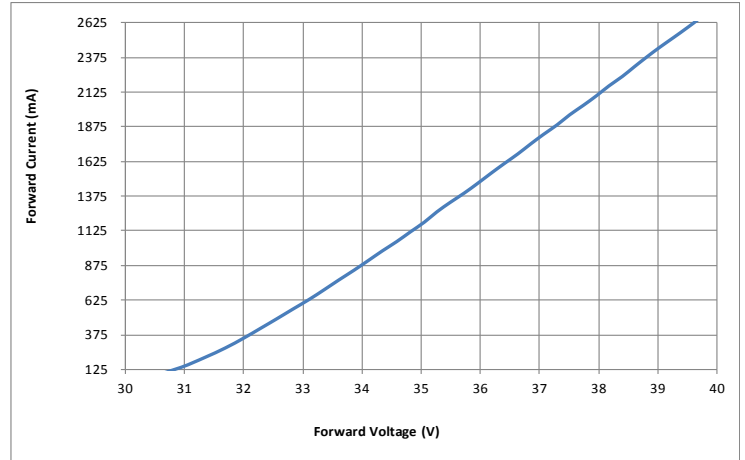
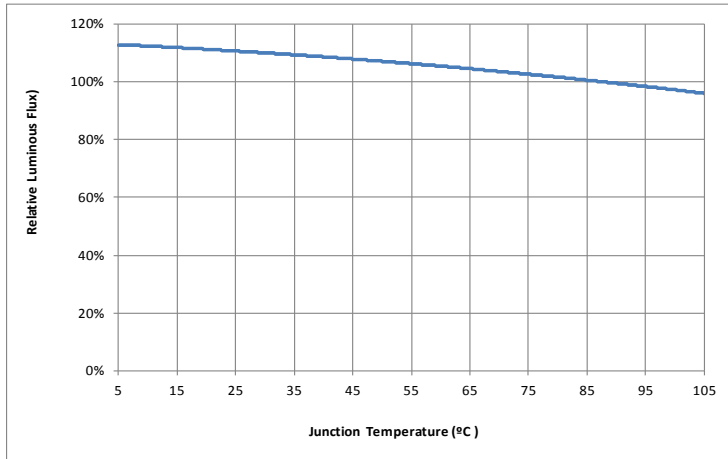
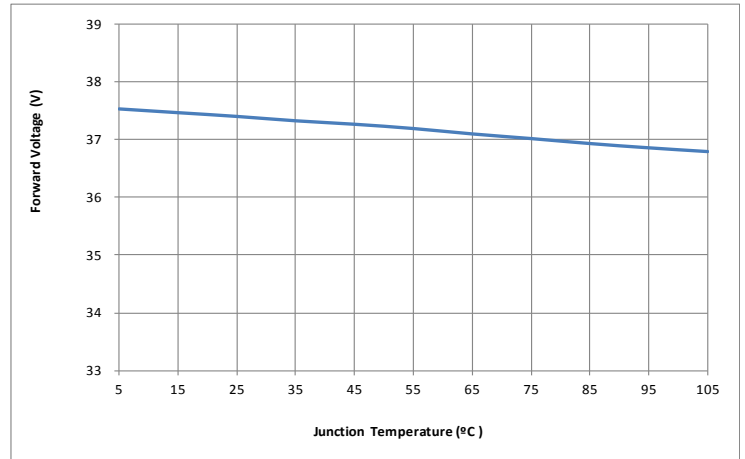
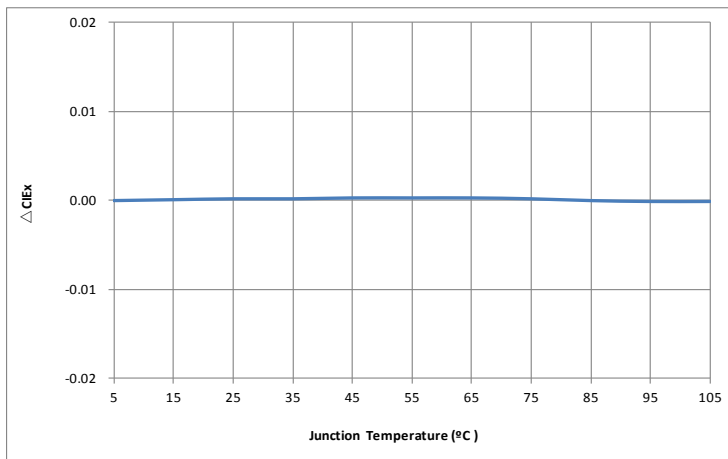
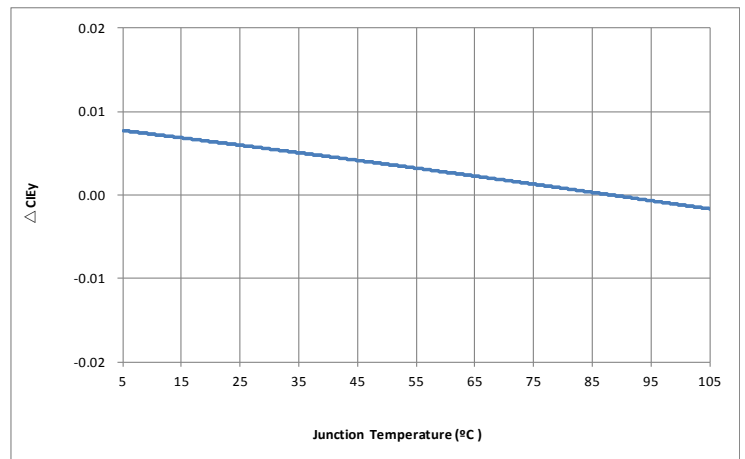
Note 2: To prevent damage refer to operating conditions for maximum operating conditions

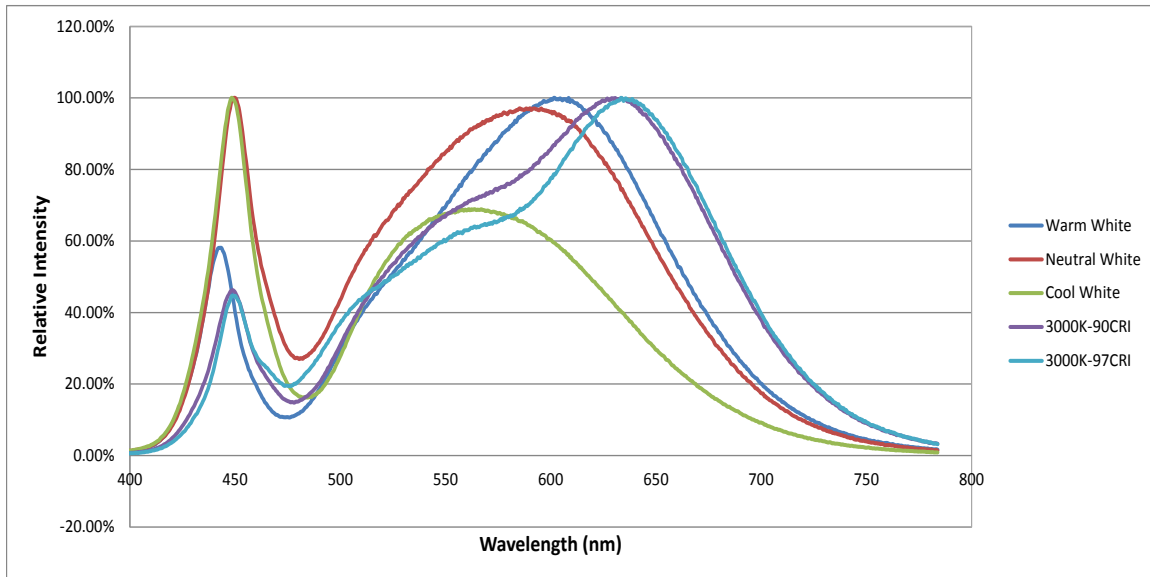
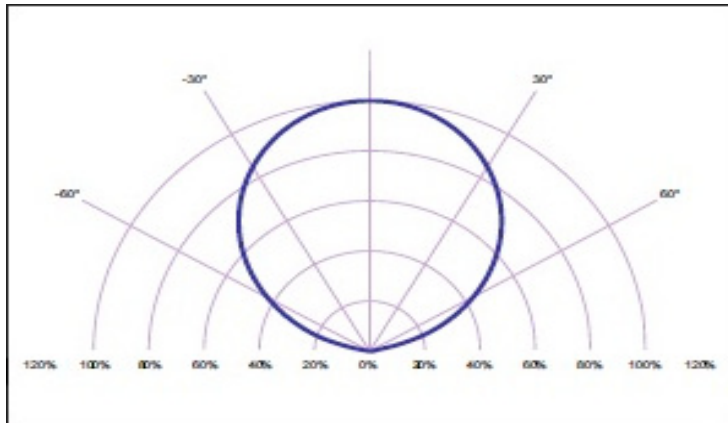
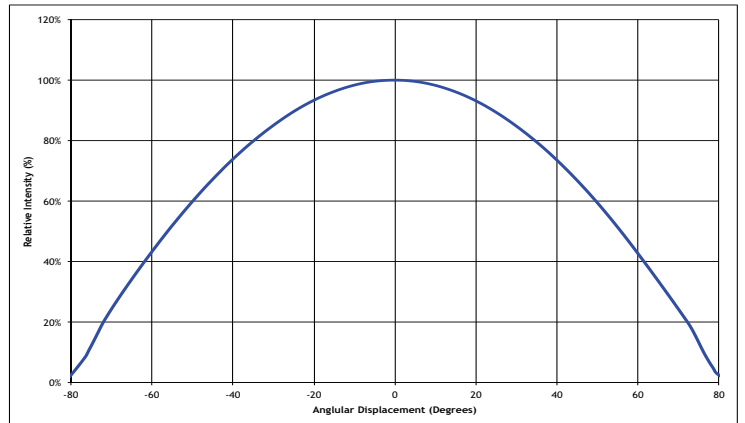
Note 3: Voltage is rated at typical forward current. For voltage at higher drive current, refer to performance graphs.

Note 4: CHM-14 COB minimum operating current is suggested to be no less than 20% of the typical value. While lower levels will not harm the device, they may result in uneven lighting across the LES area.

Note 5: Caution must be taken not to stare at the light emitted from these LEDs. Under special circumstances, the high intensity could damage the eye.

Note 6: Data sheets are subject to changes without prior notice. Please refer to the Luminus web site for the latest data sheet revisions.

CHM-14-XH20 Optical & Electrical Characteristics
Relative Output Flux vs. Forward Current @ 85°C

Forward Current vs. Forward Voltage @ 85°C

Relative Output Flux vs. Junction Temperature

Change in Voltage vs. Junction Temperature

Change in CIE_x vs. Junction Temp. (3000K, 80CRI)

Change in CIE_y vs. Junction Temp. (3000K, 80CRI)


CHM-14 Optical & Electrical Characteristics
Typical Spectrum

Typical Polar Radiation Pattern

Typical Angular Radiation Pattern


The technical drawing illustrates the Luminus sensor assembly from three perspectives:

- Top View:** Shows a square base plate with a central circular lens area. Key features include:
 - Overall width and height: 28.00 ± 0.25 [1.102 ± 0.010].
 - Four mounting holes at the corners, each with a diameter of $\phi 1.60$ [$.063$] and spaced $2X$ 3.20 [$.126$] from the edges.
 - A central circular feature with an outer diameter (RING OD) of $\phi 15.00$ [$.591$] and an inner lens diameter of $\phi 13.50$ LES [$.531$].
 - Two small circular holes, each with a diameter of $\phi 1.50$ [$.059$], located near the center.
 - Dimensions for the bottom edge: two sets of holes spaced $2X$ 11.40 [$.449$] and $2X$ 9.00 [$.354$] from the bottom edge, with a total width of 22.80 [$.898$].
 - The brand name "Luminus" is printed on the bottom edge.
- Side View:** Shows the profile of the assembly with a total thickness of 0.87 ± 0.15 [$.034 \pm .006$]. The ring height is specified as 0.50 ± 0.10 [$.020 \pm .004$].
- Perspective View:** A 3D representation of the square plate with the yellow central lens and four corner mounting holes.



The diagram shows a top-down view of a Luminus LED package. The package is rectangular with a central square die. The following markings are shown:

- Top Left:** LUMINUS logo.
- Top Right:** Luminus Devices Inc.
- Left Side:**
 - XXXXXX-XX-XX (Manufacturer Part Number & Bin Kits)
 - Bar code (in a box)
- Right Side:**
 - Rev XX
 - Bar code (in a box)
- Bottom Left:**
 - XXX-XX-XX-XX-XXXX-XX-X (Customer Part Number)
 - XXXXXXXXXXXXXXXX (Box ID)
 - Bar code (in a box)
- Bottom Right:**
 - Qty: XX
 - Bar code (in a box)

A vertical label on the far right indicates the package is **RoHS Compliant**.

Handling Notes for Luminus COBs

Luminus products are designed for robust performance in general lighting application. However, care must be taken when handling and assembling the LEDs into their fixtures. To avoid damaging Luminus COBs please follow these guide lines.

The following is an overview of the application notes detailing some of the practices to follow when working with these devices. More detailed information is available on the Luminus web site at www.luminus.com.

General Handling

Devices are made to be lifted or carried with tweezers on two adjacent corners opposite the contact pads. At no time should the devices be handled by or should anything come in contact with the light emitting surface (LES) area. This area includes the yellow colored circular area and the ring surrounding it. There are electrical connections under the LES which if damaged will cause the device to fail.

In addition, the ring frame itself should not be used for moving, lifting or carrying the device. Also do not attach any optics or mechanical holders to the ring as it is not capable to handle the mechanical stress.

Static Electricity

Luminus COBs are electronic devices which can be damaged by electrostatic discharge (ESD). Please use appropriate measures to assure the devices do not experience ESD during their handling and or storage. ESD protection guidelines should be used at all times when working with Luminus COBs.

Storage: Luminus products are delivered in ESD shielded bags and should be stored in these bags until used.

Assembly: Individuals handling Luminus COBs during assembly should be trained in ESD protection practices. Assemblers should maintain constant conductive contact with a path to ground by means of a wrist strap, ankle straps, mat or other ESD protection system.

Transporting: When transporting the devices from one assembly area to another, ESD shielded carts and carriers should be used.

Electrical Contact

Luminus COBs are designed with contact pads on their top surface. These pads are clearly marked with + and – polarity. Wires can be soldered to the contact pads for electrical connections or other solderless connector products are available.

If wires are being soldered to the COB product, we recommend attaching these wires prior to mounting the devices to a heat sink. Please contact Luminus for specific recommendations on how to solder wires if not familiar with the standard practice. Luminus can also offer design recommendations for jigs to allow easily soldering multiple products in rapid succession.

Chemical Compatibility

The resin material used to form the LES can getter hydrocarbons from the surrounding environment. As a results, certain chemical compounds are not recommended for use with the Luminus products. Use of these compounds can cause damage to the light output of the device and may permanently damage the device. Please refer to www.luminus.com for a list of the compounds not recommended for use with the Luminus COB products.

Thermal Interface Material (TIM)

Proper thermal management is critical for successful operation of any LED system. Excess operating temperature can reduce the light output of the device. And excessive heating can cause permanent damage to the device. Proper TIM material is a crucial component for effective heat transfer away from the LED during normal operation. Please refer to www.luminus.com for specific recommendations for TIM solutions.