



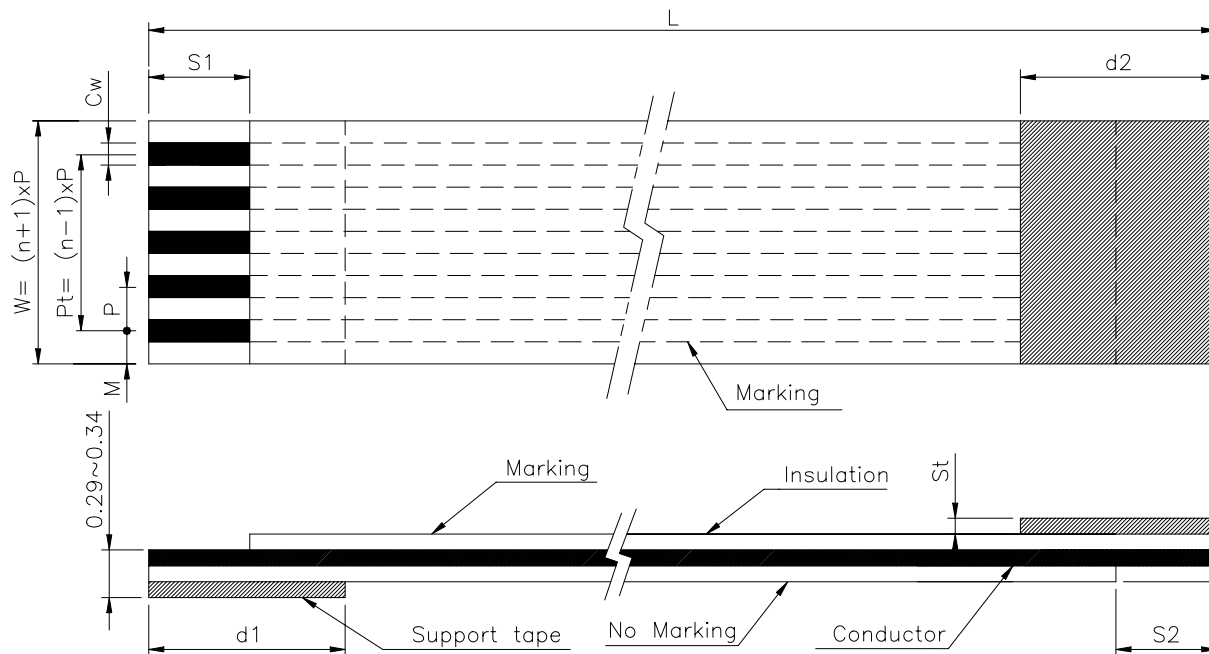

TOLERANCE:

Abbr.	TOLERANCE				
	P=0.5	P=0.8	P=1.0	P=1.25	P=2.54
P	±0.05	±0.08	±0.08	±0.10	±0.15
Pt	±0.08	±0.10	±0.10	±0.15	±0.20
W	±0.08	±0.10	±0.10	±0.20	±0.20
M	±0.08	±0.12	±0.12	±0.15	±0.20
Cw	±0.02	±0.03	±0.03	±0.03	±0.04
L	(30~100)±3, (101~300)±5, (301~600)±10, (Length more than 601mm)±15mm				



Tolerance of Cutting Tilt

	Dimension
Ft±0.01	0.043
St±0.01	0.225

RoHS Compliant

UL Style :20706

Customer P/N	CviLux P/N	No. of Conductor	Dimension											Support Tape Color
			P	Pt	L	W	M	Cw	Ct±0.01	S1±1.0	S2±1.0	d1±2.0	d2±2.0	
	FFCE2808T213000-300	28	0.5	13.5	130	14.5	0.5	0.3	0.05	4	4	8	8	BLUE

4					DATE	UNIT: mm		TITLE: FLAT FLEXIBLE CABLE (TERMINAL TYPE : T2)	 瀚荃股份有限公司 CviLux Corporation			
3				DRAWN BY: Lan	5/18-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2				ENGINEER: Lan	5/18-16'	.X ±	X" ± 2"	CUST. CODE:				
1				CHECKED BY: Lan	5/18-16'	.XX ±	.X" ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY: Lan	5/18-16'	.XXX ±	.XX" ±		DRAWING NO.	FFC002SF	FILE NO.	T216052-4A
									SCALE	1 / 1	SHEET	1 OF 1