
FN07350 SERIES CRYSTAL FILTERS

High Frequency Crystal Filter - Narrow Band

- **High frequency crystal filter - narrow band**

OUTLINE & DIMENSIONS

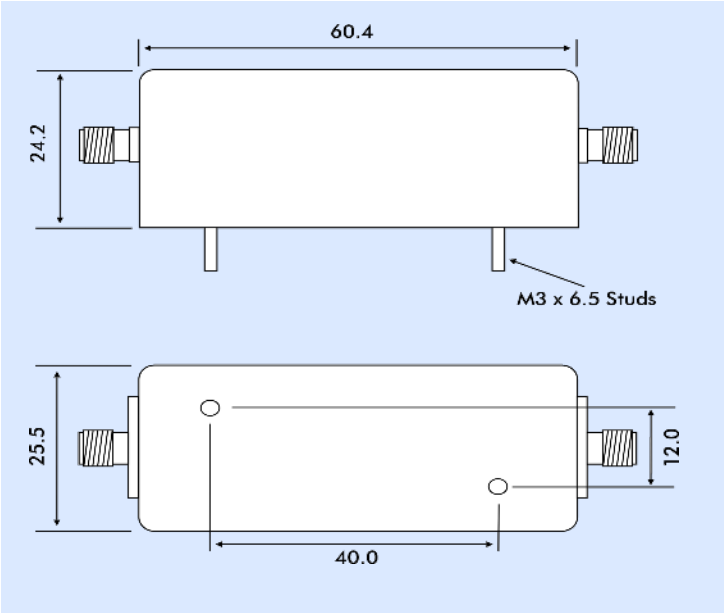

SPECIFICATION

Centre Frequency:	150.0MHz to 175.0MHz
±7.5kHz minimum:	3dB
±25kHz maximum:	30dB
±30kHz:	40dB
±40kHz:	50dB
Ultimate Attenuation:	60dB
Insertion Loss:	6dB maximum
Terminations:	50Ω
Poles:	4
Operating Temperature Range:	-20° to +70°C
Spurious:	20dB min (HF Band) typical 30dB

Part Number	Connector In	Connector Out
FN07350	BNC Female	BNC Female
FN07351	SMA Female	SMA Female
FN07352	N Type Female	N Type Female
FN07353	N Type Male	N Type Male
FN07354	Please specify	Please specify

Connector Types	
BNC - Female	BNF
BNC - Male	BNM
SMA - Female	SMF
SMA - Male	SMM
N Type - Female	NF
N Type - Male	NM

PART NUMBER GENERATION

150.000MHz	**FN07354**	**BNF**	/	**BNF**
Frequency	Part Number	Connector IN		Connector OUT

EUROQUARTZ LIMITED Blacknell Lane CREWKERNE Somerset UK TA18 7HE
Tel: +44 (0)1460 230000 Fax: +44 (0)1460 230001 info@euroquartz.co.uk www.euroquartz.co.uk