
GSX-533

5.0 x 3.2mm SM Crystal for Bluetooth / Wireless

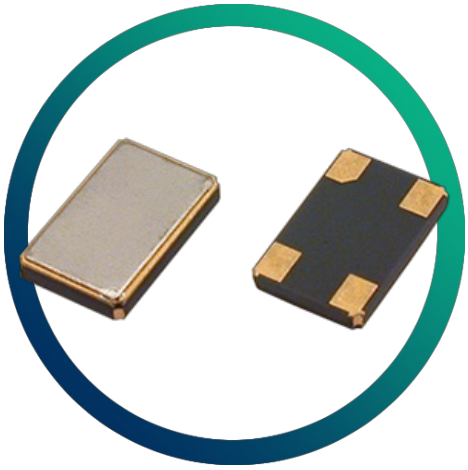

- Good frequency perturbation
- Metal lid can be grounded to minimise EMI
- Seam seal for excellent long-term stability
- Tight specifications available
- Ultra-miniature for maximum space saving


CONFIGURABLE OPTIONS


Parameter	Option Code
Frequency	
Calibration tolerance	
Any	
±10ppm	1
±20ppm	2
±30ppm	3
Temperature stability	
Any	
±10ppm	1
±20ppm	2
±30ppm	3
Operating temperature range	
Any	
-10 to +60°C	1
-20 to +70°C	2
-30 to +80°C	3
-40 to +85°C	4
Circuit condition	
Any	
9pF	N
12pF	B
16pF	D
Oscillation mode	
Any	
Fundamental	F
3rd overtone (>54.0MHz)	3

SPECIFICATIONS


Frequency range	8.0 ~ 54.0MHz (54.0 ~ 160MHz, 3rd OT under dev)
Dimensions	5.0 x 3.2 x 0.9mm
Operating temperature range	-10 to +60°C
Storage temperature range	-40 to +85°C
Equivalent series resistance (max)	100Ω (8.0 ~ 11.99MHz) .. 60Ω (12.0 ~ 13.99MHz) .. 50Ω (14.0 ~ 15.99MHz) .. 40Ω (16.0 ~ 54.0MHz)
Perturbations	±1ppm max
Ageing	±1ppm max first year
Test drive level	10µW
Soldering condition	260°C, 10 sec x2 max

PACKAGE DRAWING





SOLDER PAD LAYOUT



TOP VIEW

PAD	CONNECTION
1	Crystal
2	Ground & lid
3	Crystal
4	Ground & lid

Dimensions in mm


ORDERING INFORMATION

To request a quotation for the GSX-533 please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

MARKING



Marking type: Laser
DC = Date code


DC = Date code in YW

Year	2013 2017	2014 2018	2015 2019	2016 2020
Code	Z	z	Z	z

Week codes:
A ~ Z: weeks 1 to 26
a ~ z: weeks 27 to 52


Example: "zC" = 2018 week 3

SOLDERING PROFILE

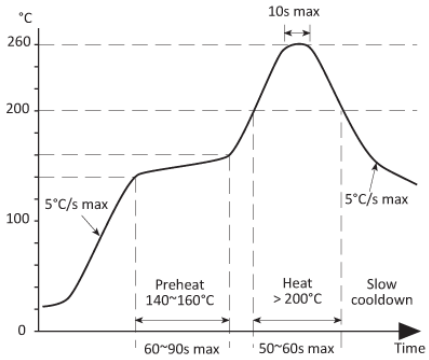

Solderability limits: 260°C max x 10sec max x 2 max

TAPE & REEL SPECIFICATION

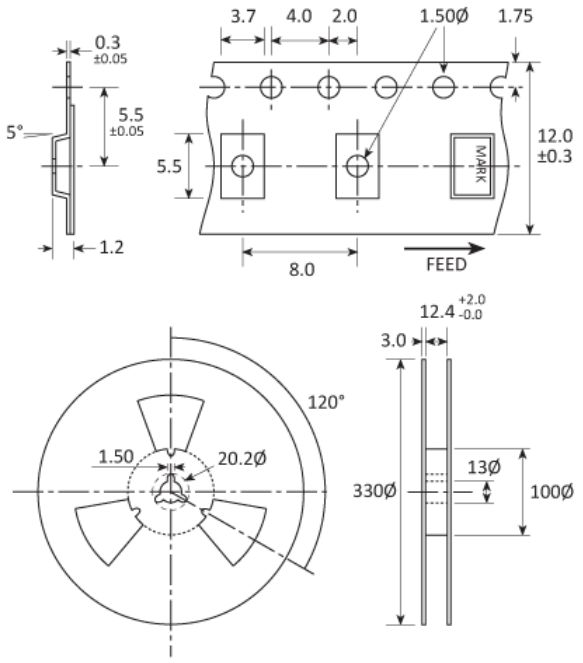

Dimensions in mm

HANDLING & STORAGE

Human Body Model (HBM) 1A (250V to <500V)

Moisture Sensitivity Level (MSL): 1 (or not applicable)

CONSTRUCTION

Ceramic body with gold-plated pads
Metal lid, seam sealed

MATERIAL COMPOSITION

Lead-free (< 0.1% by weight)

RoHS 2 compliant with no exemptions. See our declaration

REACH compliant. See our statement

Free of conflict minerals. See our declaration

Free of Halogens. See our declaration

Free of Ozone-depleting substances. See our declaration

Nominal Net Mass: 43mg

COMPOSITION

MCDFamily GSX-533.pdf

OTHER INFORMATION

About Golledge

We are the UK's leading supplier of frequency control products and are proud to serve the global electronics industry. Our philosophy is a focus firmly on your requirements by striving to meet and exceed your needs. We do this by ensuring the utmost quality and consistency in our products and services. If you have any queries about the Golledge service or any of our products please get in touch, we'd love to hear from you.

Come and visit

Eaglewood Park, ILMINSTER,
Somerset,TA19 9DQ, England

Give us a call

Tel: +44 1460 256 100
Fax: +44 1460 256 101

Email us

sales@golledge.com

Our Worldwide Distributors

Belgium & Luxembourg

Alcom Electronics NV/SA

Email info@alcom.be
Web www.alcom.be
Tel +32 (0)3 458.30.33

China, Hong Kong - 中国 / 香港

Meiya China

Email sales@meiyatech.com
Web www.meiyatech.com
Tel +86 755 2823 1923

France

Equipments Scientifique

Email comp@es-france.com
Web www.es-france.com
Tel +33 1 47 95 99 89

Germany

MEV Elektronik Service GmbH

Email info@mev-elektronik.com
Web www.mev-elektronik.com
Tel +49 54 24 23 40-0

India

V5 Semiconductors

Email sales@v5semiconductors.com
Web v5semiconductors.com
Tel +91-80-2661 0621

Israel

Phoenix Technologies Ltd

Email sales@phnx.co.il
Web www.phnx.co.il
Tel +972 9 764 4800

Netherlands

Alcom Electronics BV

Email info@alcom.nl
Web alcom.nl
Tel +31 (0)10 288.25.00

Norway

Link Nordic

Email bjorn.nyjordet@linknordic.com
Web linknordic.com
Tel +47 93 22 68 90

Russia - Россия

EFO Ltd

Email elena@efo.ru
Web www.golledge.ru
Tel +7(812)327-8654

Spain & Portugal

R.C. Microelectronica, S.A.

Email ventas@rcmicro.es
Web www.rcmicro.es
Tel +34 93 260 21 66

Our customer feedback is testament to our quality; "Never had such good service as this from anyone in 35 years of being in the industry, this is impressive and has really helped us out of a corner to keep the design flowing" Andy (Senior Design Engineer), "As always your support is state of the art" Nicoleta (Material Management), "Legendary work - as usual it has to be said" John (Operations).
To take advantage of our highly praised service get in touch with us today.