



Specification for LCD Glass


JAZZ-EC-PMP

Revision A



JAZZ	3 1/2 Digit LCD Glass Panel
EC	Serial EC, Dimension 50.80 x 30.48 x 3.00 mm
P	Positive TN Mode
MP	Pink Character on Gray Background
/	Reflective
/	6 o'clock Viewing Direction
/	Top: -20~+70°C; Tstr: -30~+80°C
/	No Backlight
/	RoHS Compliant
/	Pin Connection



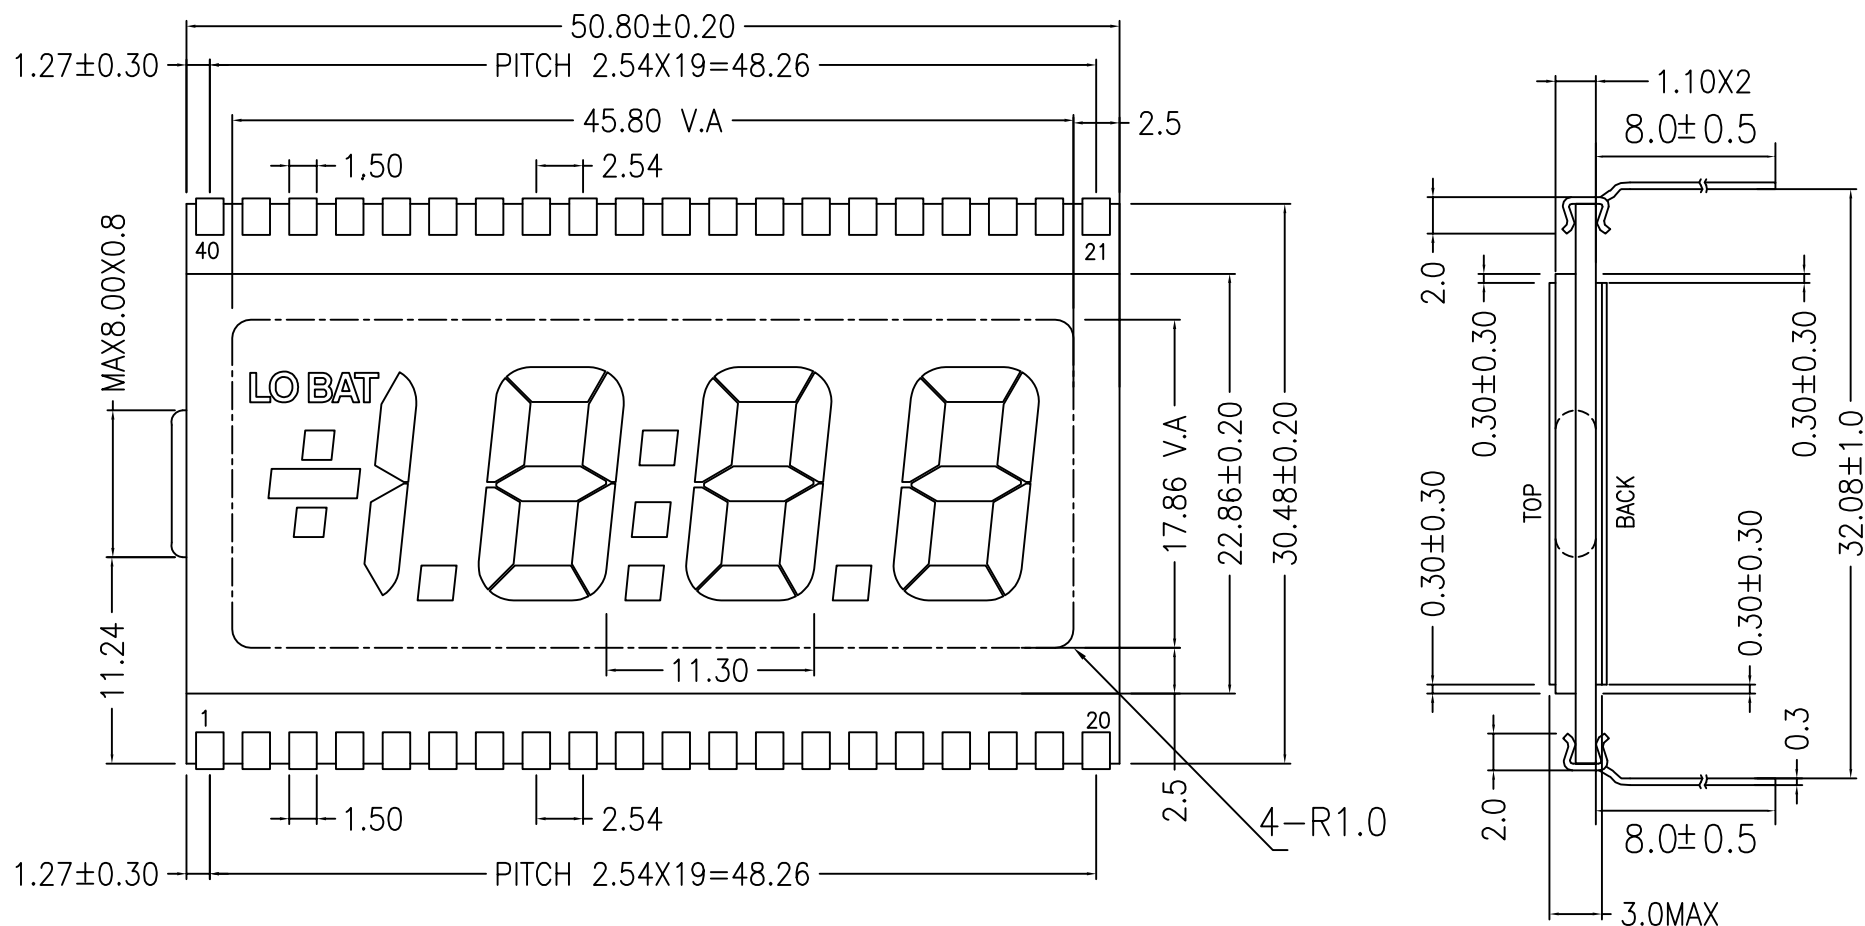

NOTES:


- | | | | |
|--------------------|------------|--|----------|
| 1. LCD type: | TN | 6. Drive voltage: | 5.0V |
| 2. Display mode: | Positive | 7. Drive method: | STATIC |
| 3. Polarizer type: | Reflective | 8. Operating Temp: | -20~70°C |
| 4. Viewing Angle: | 6:00 | 9. Storage Temp: | -30~80°C |
| 5. Connector: | Pin | 10. Green Character on Gray Background | |



PART NUMBER:
JAZZ-EC-PMG

DATE:
2013/08/21

NO.	REVISION	DATE
1	INITIAL VERSION	2013/08/21



SCALE: NTS

UNITS: mm

SHEET 1 OF 2

PIN	SEG	PIN	SEG	PIN	SEG	PIN	SEG
1	BP	11	2C	21	4A	31	2F
2	TX	12	DP2	22	4F	32	2G
3	1BC	13	3E	23	4G	33	
4		14	3D	24	3B	34	
5		15	3C	25	3A	35	
6		16	DP3	26	3F	36	
7		17	4E	27	3G	37	
8	DP1	18	4D	28	COL	38	LO BAT
9	2E	19	4C	29	2B	39	TY
10	2D	20	4B	30	2A	40	BP

