


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

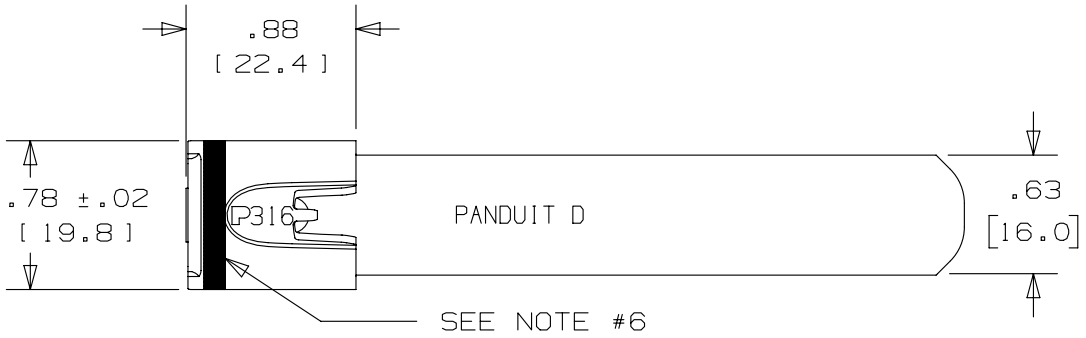


PANDUIT PART NUMBER	MAXIMUM BUNDLE DIAMETER	PKG QTY	"L" LENGTH +/- .3 [7]
MLT4DSH-Q316	4" [102]	25	29.5" [749]
MLT6DSH-Q316	6" [152]	25	41.5" [1054]
MLT8DSH-Q316	8" [203]	25	53.5" [1359]

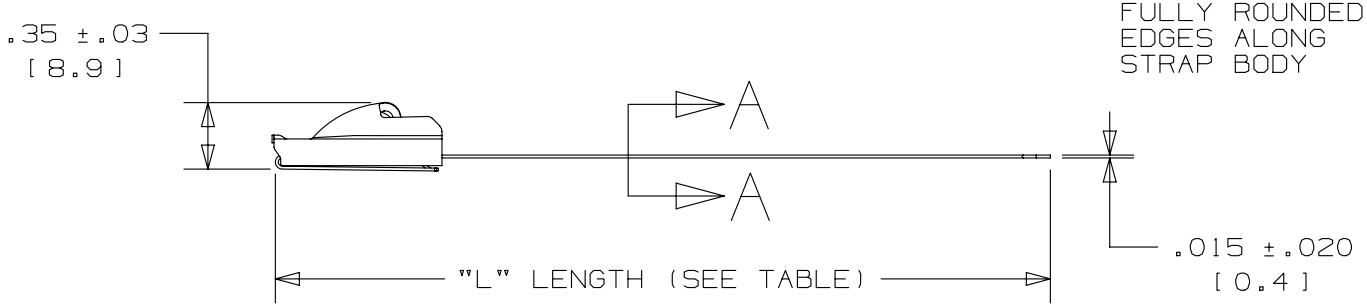



SECTION A - A
SCALE 4 : 1

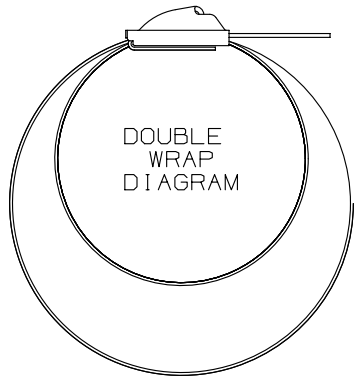

BODY WRAPS AROUND BUNDLE TWO TIMES
PASSING THROUGH THE HEAD TWICE
(NOT TO SCALE)

NOTES:
1. APPLICATION TOOLS - RT2HT, RT2HTN & PBTMT
2. MINIMUM LOOP TENSILE STRENGTH - 1200 LBS. (5340 NEWTONS) WHEN TESTED ON A 3" MANDREL
3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
   .XXX = ±.010 [.25] .XX = ±.02 [.5]
   .X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL
6. GREEN COLOR STRIPE IDENTIFIER FOR DOUBLE LOOP WRAP PRODUCT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
08A	02/13	JAMB	SKB	RGRO	UPDATE DRAWING TO NEW PANDUIT GLOBAL TITLE BLOCK WITH PANDUIT LOGO. ADDED APPLICATION TOOL PBTMT.	SSECN01028
07A	02/12	MIM	SKB	RGRO	NOTE 3: METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	------
06A	09/09	MIM	CCH	SKB	REPLACE EASY-THREAD HEAD DESIGN WITH THE ORIGINAL CONVENTIONAL HEAD DESIGN	------
05A	08/08	MIM	ROL	---	1. DRAWING TO REVISED TO REFLECT EASY THREAD HEAD DESIGN 2. REPLACED OLD TITLEBLOCK DESIGN WITH NEW 3. MOVED NOTE #5 TOLERANCE TO TITLE BLOCK 4. ADDED APPLICATION TOOL RT2HT AND RT2HTN TO NOTE #1	-------
04	08/05	JAMB	PAB	---	ADDED GREEN COLOR STRIPE IDENTIFIER. ADDED NOTE 6	SS00026
03	06/05	JAMB	EJD	JJB	ADDED NEW TIP CONFIGURATION	SS00011
02	08/04	JAMB	EJD	JJB	REMOVED "AISI NO. 5"	11907

TITLE
METAL LOCKING TIE SUPER HEAVY DUTY DOUBLE LOOP 316 STAINLESS STEEL
CUSTOMER DRAWING

ITEM REVISION NAME: N41166BS/08

DATASET FILE NAME: N41166BS_DC/08A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.x ± .1 [2.54] .xxx ± .005 [.127]
.xx ± .01 [.25] ANGLES ± 5 °
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: N41166BS_DC

DRAWN BY	DATE	CHK	SCALE	SIZE
MIM	08/27/08	SKB	2:1	A

SHT 1 OF 1