
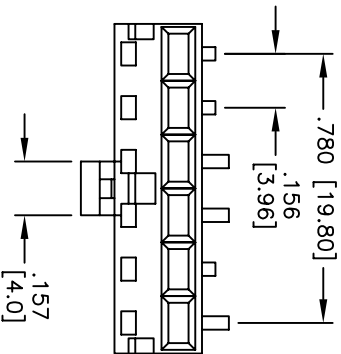


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/7/06	

APPROVED: _____

DATE: _____ TITLE: _____

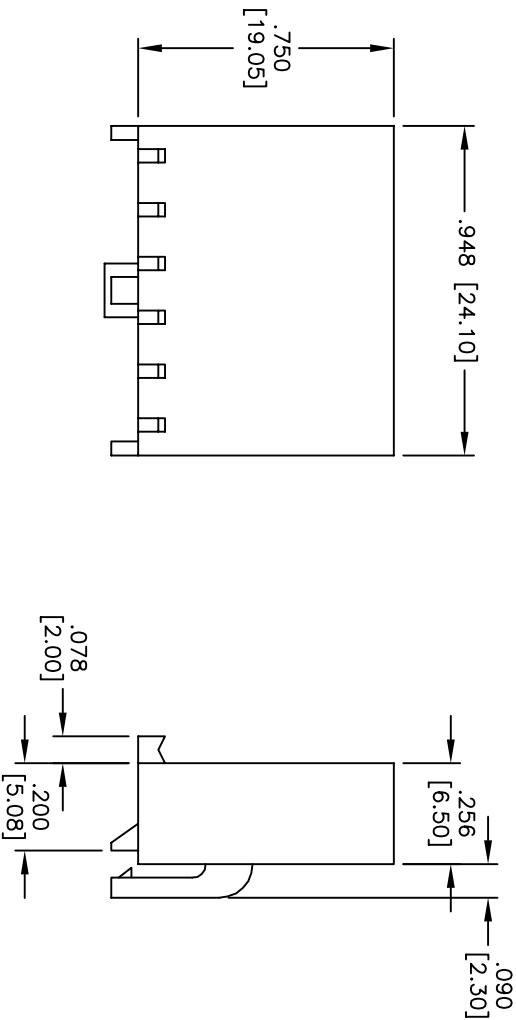

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Natural

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max.

Current rating: 5 Amps max.

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +85°C

Environmental:

Lead free, RoHS compliant



ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE

POWER LATCH CRIMP HOUSING
.156 [3.96] PITCH

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES							
.X	± .10	ØXX	± .10				
.XX	± .020	ØXXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS			DATE				
DRAWN	SS		7/7/06				
CHECKED							
APPROVED							
				SIZE	PART NO.	REV.	
				X	MTG-06	-	
				REF:	SCALE: NTS	SHEET 1 OF 1	