
SANYO

Cadnica

Cell Type N-150NS
Specifications






Dimensions of Bare Cell	H	28.5 $^{\pm0.3}$	mm
		1.122 $^{\pm0.012}$	inch
	D	11.5 $^{\pm0.2}$	mm
		0.453 $^{\pm0.008}$	inch
	d	5.5	mm
		0.217	inch


Nominal Capacity		135mAh
Nominal Voltage		1.2V
Standard Charging Current		4.5mA
Charging Time		above 48Hrs.
Ambient Temperature	Charge	0°C to +70°C [+32°F to 158°F]
	Discharge	-20°C to +70°C [-4°F to 158°F]
	Storage	-30°C to +70°C [-22°F to 158°F]
Internal Impedance (Av.) (at 50% discharge)		50.0mΩ (at 1000Hz)
Weight		9g/0.32oz
Dimensions(D)×(H) (with tube)		$12.0\ ^{0}_{-0.5} \times 29.3\ ^{0}_{-1}$ mm $0.47\ ^{0}_{-0.02} \times 1.15\ ^{0}_{-0.04}$ inch

Typical Characteristics


Charge

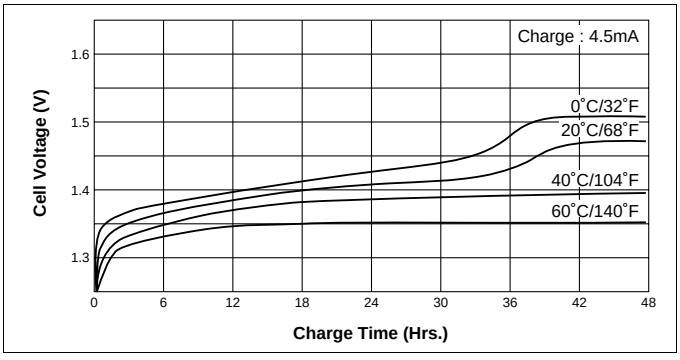


Discharge (at very low rate)

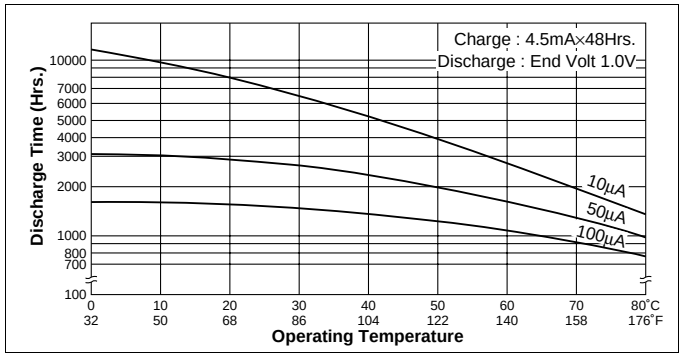


Cell Capacity (at various discharge rate)

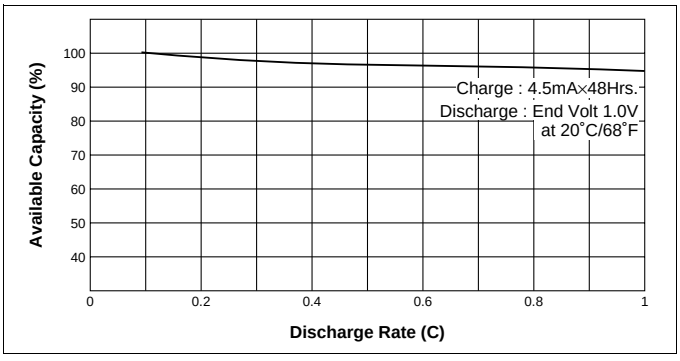

Discharge (at various temperature)

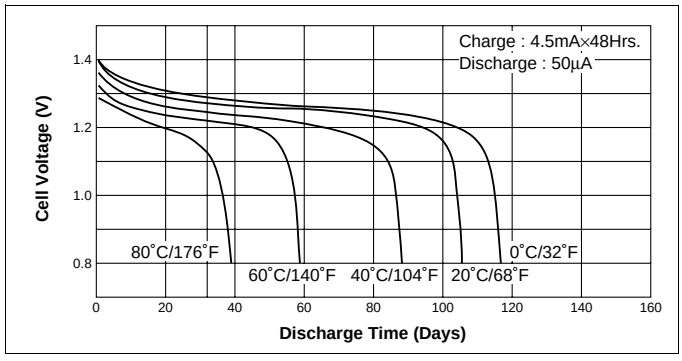

Discharge (at low rate)

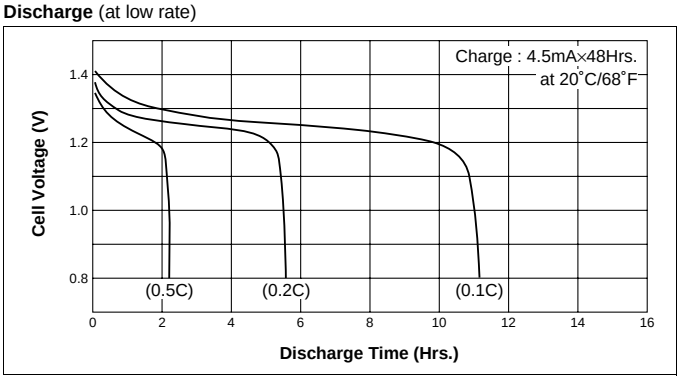

Temperature (Charge & Discharge)

