MATERIALS	
BODY	PASSIVATED STAINLESS STEEL
CONTACT	GOLD PLATED
INSULATOR	PPO

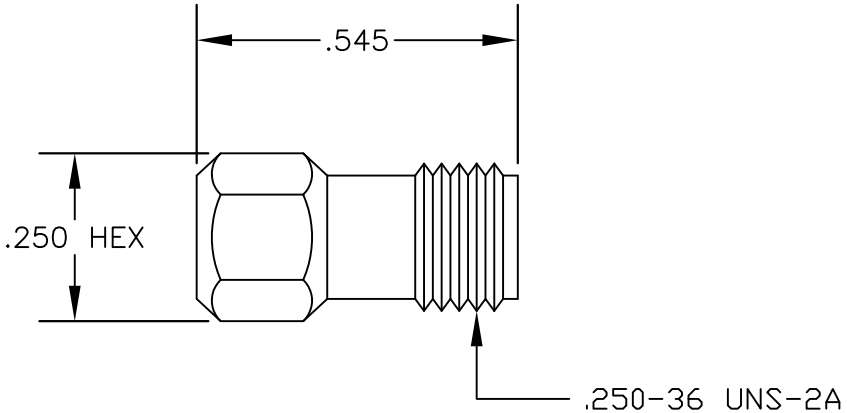

SPECIFICATIONS

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC TO 26.5 GHz
POWER HANDLING CAPABILITY: 1 WATT
MAXIMUM VSWR: 1.35:1

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE
PE6079

DES. SMA FEMALE PRECISION TERMINATION
FREQUENCY RANGE: DC TO 26.5 GHz

SIZE A	FSCM NO. 53919	CAD FILE 072806	SCALE N/A		127

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.