

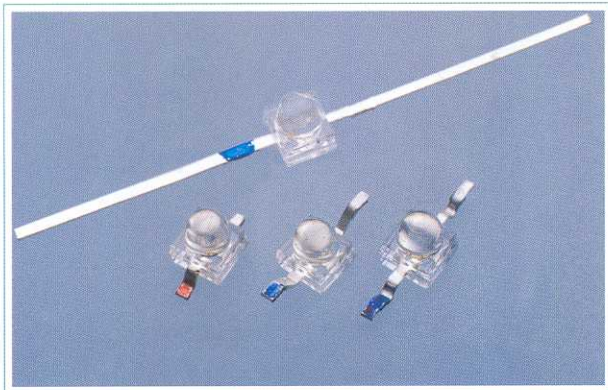
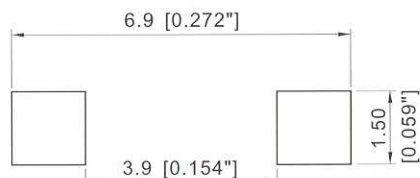


MINI TYPE LED LAMPS


小型化發光二極體指示

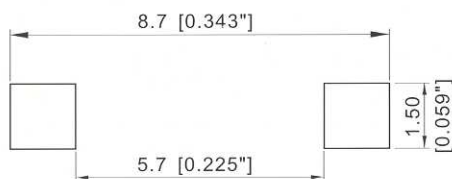

Recommended Soldering Pattern For Reflow Soldering

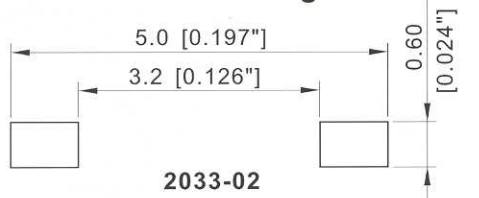


Package Outline Drawing:

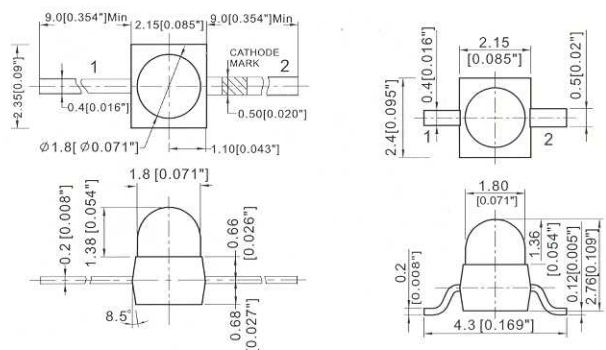

2333-01

2333-02

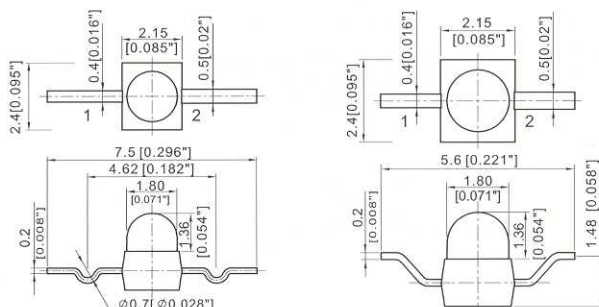


2333-03

2333-04

- NOTES 1. All dimensions are in millimeters (inches);
2. Tolerances are $\pm 0.1\text{mm}$ (0.004inch) unless otherwise noted;
3. Resin color: water clear.

Recommended Reflow Soldering Profile.

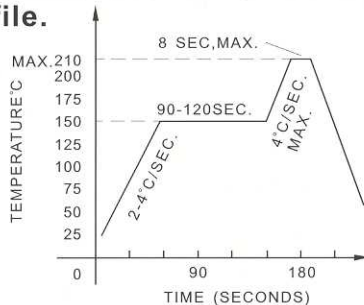

1.8mm Round Subminiature Axial LEDs

Part Number	Raw Material	Wave Length λ D(nm)	Emitting color	Lens Type	Vf(V) Typ	Iv(mcd) Typ	Viewing angle 2 θ 1/2(°)
					At 20mA		
RF-RS2033TS-(01-04)E	GaAlAs	645	Red	Water Clear	1.8	90	20
RF-RU2033TP-(01-04)E	AlGaInP	630	Red	Water Clear	2.0	210	20
RF-OU2033TP-(01-04)E	AlGaInP	620	Orange	Water Clear	2.0	270	20
RF-YU2033TP-(01-04)E	AlGaInP	587	Yellow	Water Clear	2.0	270	20
RF-YG2033TP-(01-04)E	GaP	570	Yellow Green	Water Clear	2.2	72	20
RF-GP2033TP-(01-04)E	AlInGaIn	525	Green	Water Clear	3.3	720	20
RF-BN2033TP-(01-04)E	AlInGaIn	470	Blue	Water Clear	3.3	215	20
RF-WN2033TP-(01-04)E	AlInGaIn		White	diffused	3.3	480	20