
SB30-45-258M SB30-40-258M
SB30-45-258AM SB30-40-258AM
SB30-45-258RM SB30-40-258RM

MECHANICAL DATA
Dimensions in mm

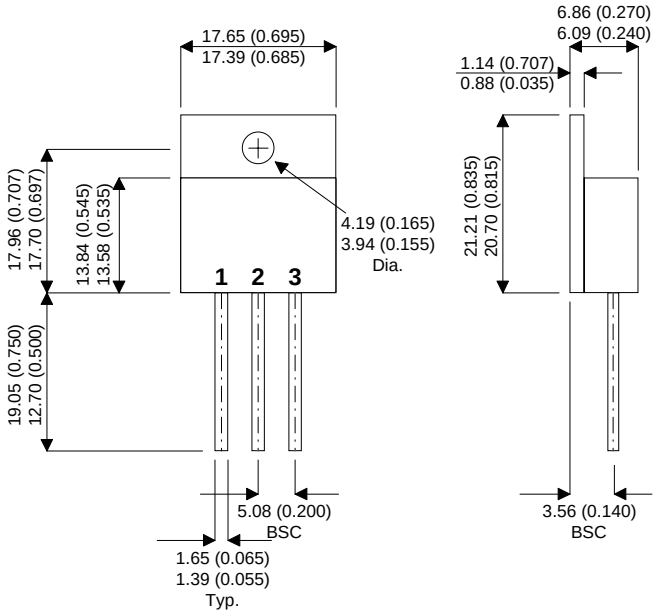


TO258 METAL PACKAGE

DUAL SCHOTTKY BARRIER DIODE IN TO258 METAL PACKAGE FOR HI–REL APPLICATIONS

FEATURES
- **HERMETIC TO258 METAL PACKAGE**
- **ISOLATED CASE**
- **AVAILABLE IN COMMON CATHODE, COMMON ANODE AND SERIES VERSIONS**
- **SCREENING OPTIONS AVAILABLE**
- **OUTPUT CURRENT 30A**
- **LOW V_F**
- **LOW LEAKAGE**

Common Cathode	Common Anode	Series Connection
SB30-45-258M	**SB30-45-258AM**	**SB30-45-258RM**
SB30-40-258M	**SB30-40-258AM**	**SB30-40-258RM**



1 = A_1 Anode 1	1 = K_1 Cathode 1	1 = K_1 Cathode 1
2 = K Cathode	2 = A Anode	2 = Centre Tap
3 = A_2 Anode 2	3 = K_2 Cathode 2	3 = A_2 Anode

ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C unless otherwise stated)		**SB30-40-258M SB30-40-258AM SB30-40-258RM**	**SB30-45-258M SB30-45-258AM SB30-45-258RM**
V_{RRM}	Peak Repetitive Reverse Voltage	40V	45V
V_{RSM}	Peak Non-Repetitive Reverse Voltage	40V	45V
V_R	Continuous Reverse Voltage	40V	45V
I_O	Output Current	30A	
I_{FSM}	Peak Non-Repetitive Surge Current (50Hz)	245A	
T_{STG}	Storage Temperature Range	-55°C to 150°C	
T_J	Maximum Operating Junction Temperature	150°C/W	

Semelab plc. Telephone +44(0)1455 556565. Fax +44(0)1455 552612.
E-mail: sales@semelab.co.uk Website: http://www.semelab.co.uk

SEME LAB

SB30-45-258M SB30-40-258M
SB30-45-258AM SB30-40-258AM
SB30-45-258RM SB30-40-258RM

ELECTRICAL CHARACTERISTICS (Per Diode)(T_{CASE} = 25°C unless otherwise stated)

Parameter		Test Conditions		Min.	Typ.	Max.	Unit
V_F	Forward Voltage	I_F = 15A	T_J = 125°C			0.6	V
		I_F = 20A	T_J = 25°C			0.8	
I_R	Reverse Current	$V_R = V_{RRM}$	T_J = 100°C			30	mA
		$V_R = V_{RRM}$	T_J = 25°C			500	µA
C_d	Junction Capacitance	V_R = 5 V	f = 1 MHz		500		pF

Pulse test tp=300µs $\delta \leq$ 2%

THERMAL CHARACTERISTICS

$R_{TH(j-c)}$	Maximum Thermal Resistance Junction To Case	2.0	°C/W

Semelab plc. Telephone +44(0)1455 556565. Fax +44(0)1455 552612.
E-mail: sales@semelab.co.uk Website: http://www.semelab.co.uk