



SHANGHAI SUNRISE ELECTRONICS CO., LTD.

SB320 THRU SB360

SCHOTTKY BARRIER RECTIFIER

TECHNICAL SPECIFICATION


VOLTAGE: 20 TO 60V CURRENT: 3.0A

FEATURES

- Epitaxial construction for chip
- High current capability
- Low forward voltage drop
- Low power loss, high efficiency
- High surge capability
- High temperature soldering guaranteed:
250°C/10sec/0.375"(9.5mm) lead length
at 5 lbs tension

MECHANICAL DATA

- Terminal: Plated axial leads solderable per
MIL-STD 202E, method 208C
- Case: Molded with UL-94 Class V-O
recognized flame retardant epoxy
- Polarity: Color band denotes cathode
- Mounting position: Any

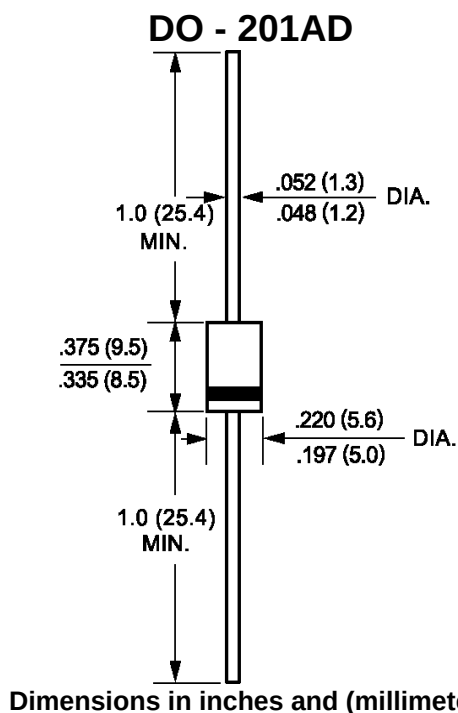

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Single-phase, half-wave, 60Hz, resistive or inductive load rating at 25°C, unless otherwise stated, for capacitive load, derate current by 20%)

RATINGS	SYMBOL	SB 320	SB 330	SB 340	SB 350	SB 360	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	V
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	V
Maximum Average Forward Rectified Current (9.5mm lead length at T _L =95°C)	I _{F(AV)}	3.0					A
Peak Forward Surge Current (8.3ms single half sine-wave superimposed on rated load)	I _{FSM}	80					A
Maximum Forward Voltage (at 3.0A DC)	V _F	0.55			0.75		V
Maximum DC Reverse Current T _a =25°C	I _R	3.0					mA
at rated DC blocking voltage T _a =100°C		30					mA
Typical Junction Capacitance (Note 1)	C _J	220					pF
Typical Thermal Resistance (Note 2)	R _{θ(ja)}	30					°C/W
Operating Temperature	T _J	-65 to +125			-65 to +150		°C
Storage Temperature	T _{STG}	-65 to +150					°C

Note:

1. Measured at 1.0 MHz and applied reverse voltage of $4.0V_{dc}$
2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, vertical P.C. board mounted

<http://www.sse-diode.com>