

6

5

4

3




2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/7/04	

APPROVED: _____

DATE: _____ TITLE: _____

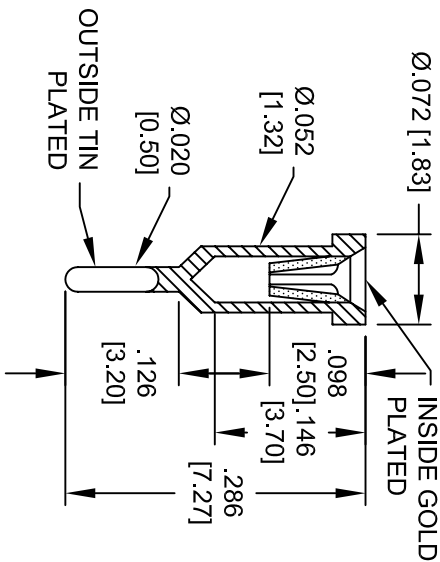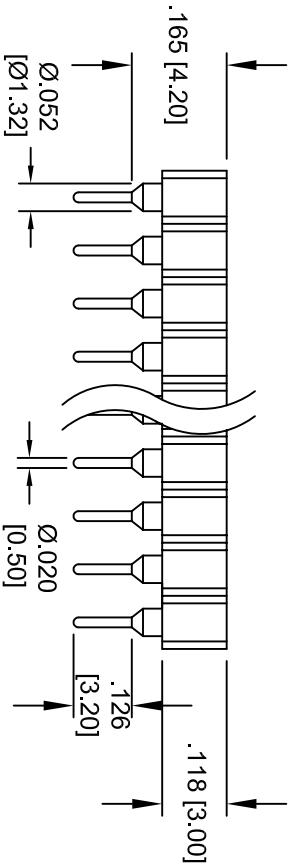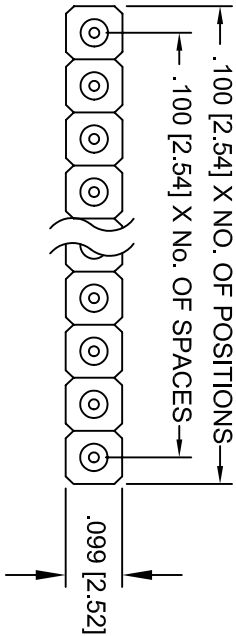

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Inner contact: Gold Flash over Nickel underplate

Outer contact: Tin over Copper underplate

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 5000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

SINGLE ROW MACHINE CONTACT STRIP

INNER GOLD / OUTER TIN

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		Holes	
.X	± .10	Ø.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010	Ø.XXX	± .010
APPROVALS		DATE			
DRAWN	SS	9/7/04			
CHECKED					
APPROVED					
SIZE		PART NO.		REV.	
X		SICM-XX-1-GT		-	
REF:		SCALE: NTS		SHEET 1 OF 1	