Low Droop Rate/Accurate Sample-and-Hold Amplifiers

SMP-10/SMP-11

FEATURES

SMP-10

- **Low Droop Rate 5.0μV/ms**
- **Linearity Error 0.005%**
- **High Sample/Hold Current Ratio ..... 2×10^9**

SMP-11

- **Low Droop Rate Over Temperature 2400μV/ms**
- **High Sample/Hold Current Ratio ..... 1.7×10^8**

BOTH SMP-10 AND SMP-11

- **Fast Acquisition Time, 10V Step to 0.1% 3.5μs**
- **High Slew Rate 10V/μs**
- **Low Aperture Time 50ns**
- **Trimmed for Minimum Zero-Scale Error 0.45mV**
- **Feedthrough Attenuation Ratio 96dB**
- **Low Power Dissipation 160mW**
- **DTL, TTL & CMOS Compatible Logic Input**
- **HA-2420, HA-2425, SHM-IC-1, and AD583 Socket Compatible**
- **Available in Die Form**

ORDERING INFORMATION †

$T_A = +25°C$				
		PACKAGE		
V_{ZS} (mV)	DROOP RATE IN μV/ms	14-PIN DIP HERMETIC	LCC	OPERATING TEMPERATURE RANGE
1.5	20	SMP10AY*	–	MIL
1.5	20	SMP10EY	–	COM
3.0	50	SMP10FY	–	COM
1.5	200	SMP11AY*	–	MIL
3.0	500	SMP11BY*	SMP11BRC/883	MIL
1.5	200	SMP11EY	–	COM
3.0	500	SMP11FY	–	COM
7.0	900	SMP11GY	–	COM
7.0	900	SMP11GS	–	XIND
7.0	900	SMP11GP	–	XIND

* For devices processed in total compliance to MIL-STD-883, add /883 after part number. Consult factory for 883 data sheet.

† Burn-in is available on commercial and industrial temperature range parts in CerDIP, plastic DIP, and TO-can packages.

GENERAL DESCRIPTION


The SMP-10/11 are precision sample-and-hold amplifiers that provide the high accuracy, the low droop rate and the fast acquisition time required in data acquisition and signal processing systems. Both devices are essentially noninverting unity gain circuits consisting of two very high input impedance buffer amplifiers connected together by a diode bridge switch.

HIGH ACCURACY AND LOW DROOP RATE

The high input impedance and the low droop rates of the SMP-10 and the SMP-11 are achieved by using bipolar Darlington circuits and an ion implant process that creates "super beta" transistors.


The output buffer's input stage converts to a super beta Darlington configuration during the hold mode, which results in a very low droop rate with no penalty in acquisition time. The use of bipolar transistors achieves a low change in droop rate over the operating temperature range. *Continued*

PIN CONNECTIONS




16-PIN SOL
(S-Suffix)

** SAMPLE/HOLD CONTROL




SMP-11BRC/883
LCC PACKAGE
(RC-Suffix)



14-PIN DIP (Y-Suffix)
14-PIN EPOXY DIP (P-Suffix)

* PINS 1 AND 8 ARE NOT INTERNALLY CONNECTED, IN UNITY GAIN APPLICATIONS, SMP-10 AND SMP-11 CAN REPLACE HA-2425, HA-2420, SHM-IC-1 AND AD-583 DIRECTLY.

FUNCTIONAL DIAGRAM

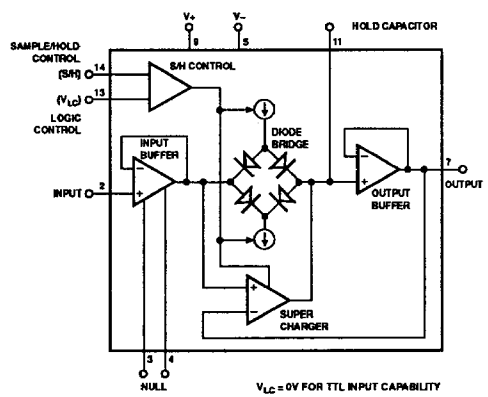

S/H	MODE
0	Sample
1	Hold

Manufactured under the following patents: 4,109,215 and 4,142,117.

GENERAL DESCRIPTION *Continued*

FAST ACQUISITION

A unique super charger provides up to 50mA of charging current to the hold capacitor, which results in smooth, fast charging with minimum noise. As the hold capacitor voltage nears its final value, the low current diode bridge controls the final settling time. This unique combination of linear functions in a monolithic circuit enables the system designer to achieve superior performance.

ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage (V+ minus V–) 36V
Derate Above 100°C ..... 10mW/°C
Input Voltage ..... Equal to Supply Voltage
Logic and Logic Reference
Voltage ..... Equal to Supply Voltage
Output Short-Circuit Duration ..... Indefinite
Hold Capacitor Short-Circuit Duration ..... 60 sec
Storage Temperature Range ..... –65°C to +150°C
Lead Temperature (Soldering, 60 sec) ..... 300°C

Operating Temperature Range
SMP-10AY ..... –55°C to +125°C
SMP-10EY, FY ..... 0°C to +70°C
SMP-11AY, BY, BRC ..... –55°C to +125°C
SMP-11EY, FY, GY ..... 0°C to +70°C
SMP11GS, GP ..... –40°C to +85°C
Junction Temperature (T_j) ..... –65°C to +150°C

PACKAGE TYPE	θ_{JA} (Note 2)	θ_{JC}	UNITS
14-Pin Hermetic DIP (Y)	108	16	°C/W
14-Pin Epoxy DIP (P)	83	39	°C/W
16-Pin SOL (S)	98	30	°C/W
20-Contact LCC (RC)	98	38	°C/W

NOTES:
1. Absolute ratings apply to both DICE and packaged parts, unless otherwise noted.
2. θ_{JA} is specified for worst case mounting conditions, i.e., θ_{JA} is specified for device in socket for CerDIP and LCC packages.

ELECTRICAL CHARACTERISTICS at $V_S = \pm15V$, $C_H = 0.005\mu F$, V_{LC} connected to ground, $T_A = +25°C$, unless otherwise noted.

			SMP-10A/E SMP-11A/E			SMP-10F SMP-11B/F			SMP-11G			
PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	UNITS
Zero-Scale Error (Hold Mode)	V_{ZS}	$V_{IN} = 0$ $V_{S/H} = 3.5V$, (Note 2)	–	0.45	1.5	–	0.60	3.0	–	1.5	7.0	mV
Input Bias Current	I_B	$V_{IN} = 0$	–	35	65	–	55	90	–	90	160	nA
Leakage (Droop) Current	I_{DR}	SMP-10 SMP-11	– –	– –	0.10 1.00	– –	– –	0.25 2.50	– –	– –	– 4.5	nA
Droop Rate	dV_{CH}/dt	SMP-10 SMP-11	– –	5 60	20 200	– –	5 70	50 500	– –	– 80	– 900	µV/ms
Input Resistance	R_{IN}	(Note 1)	2.0	3.0	–	1.4	2.5	–	–	2.0	–	GΩ
Voltage Gain	A_V	Sample Mode $V_{IN} = \pm10V$, $R_L = 5k\Omega$ or $V_{IN} = \pm5V$, $R_L = 2.5k\Omega$	0.99963	0.99983	–	0.99953	0.99978	–	0.99940	0.99975	–	V/V
Acquisition Time	t_{aq}	10V Step to Within 10mV of Final Value (0.1%) 10V Step to Within 1.0mV of Final Value (0.01%)	– –	3.5 5.0	– –	– –	3.5 5.0	– –	– –	3.5 5.0	– –	µs µs
Aperture Time	t_{ap}		–	50	–	–	50	–	–	50	–	ns
Hold Mode Settling Time	t_{Hm}	Settling to 1mV of Final Value. SMP-10 SMP-11	– –	7 1.5	– –	– –	7 1.5	– –	– –	7 1.5	– –	µs
Charge Transfer	Qt	$V_{IN} = 0$ $V_{S/H} = 3.5V$	–	5	–	–	5	–	–	5	–	pC
Slew Rate	SR	$V_{IN} = \pm10V$ $R_L = 2.5k\Omega$	–	10	–	–	10	–	–	10	–	V/µs
Hold Capacitor Charging Current	I_{CH}	$V_{IN} - V_{OUT} \geq \pm3V$	30	50	–	20	50	–	–	50	–	mA
Sample/Hold Current Ratio	I_{CH}/I_{DR}	SMP-10 SMP-11	$3x10^8$ –	$2x10^9$ $1.7x10^8$	– –	$8x10^7$ –	$8x10^8$ $1.5x10^8$	– –	– –	– $1.5x10^8$	– –	mA/mA
Feedthrough Attenuation Ratio	F_A	Input = $20V_{p-p}$ 1kHz $R_L = 5k\Omega$, (Note 1)	86	98	–	80	90	–	–	90	–	dB
Full Power Bandwidth	F_p	$\pm10V_{p-p}$ (Dissipation Limited)	–	100	–	–	100	–	–	100	–	kHz

ELECTRICAL CHARACTERISTICS at $V_S = \pm15V$, $C_H = 0.005\mu F$, V_{LC} connected to ground, $T_A = +25°C$, unless otherwise noted. *Continued*

PARAMETER	SYMBOL	CONDITIONS	SMP-10A/E SMP-11A/E MIN	SMP-10A/E SMP-11A/E TYP	SMP-10A/E SMP-11A/E MAX	SMP-10F SMP-11B/F MIN	SMP-10F SMP-11B/F TYP	SMP-10F SMP-11B/F MAX	SMP-11G MIN	SMP-11G TYP	SMP-11G MAX	UNITS
Input Voltage Range and/or Output Voltage Swing		$R_L = 2.5k\Omega$	±11	±11.5	–	±10.5	±11.5	–	±10.5	±11.5	–	V
Output Resistance	R_O		–	0.15	–	–	0.15	–	–	0.15	–	Ω
Power Supply Rejection Ratio	PSRR	Sample Mode $V_S = \pm9V$ to $\pm18V$	82	92	–	77	92	–	72	92	–	dB
Power Consumption (DC)	P_D	Sample Mode $V_{IN} = 0$	–	160	180	–	170	210	–	180	240	mW

NOTES:
1. Guaranteed by design.
2. Measured 500µs after hold command.

ELECTRICAL CHARACTERISTICS – SMP-10 ONLY at $V_S = \pm15V$, $C_H = 0.005\mu F$, $V_{LC} = 0V$, $T_A = +25°C$, device fully warmed up, unless otherwise noted.

4

PARAMETER	SYMBOL	CONDITIONS	SMP-10A/E MIN	SMP-10A/E TYP	SMP-10A/E MAX	SMP-10F MIN	SMP-10F TYP	SMP-10F MAX	UNITS
Hold Step	V_{HS}	$V_{IN} = 0$	–1.0	+1.5	+4.0	–3.0	+1.5	+6.0	mV
Linearity Error	NL	$V_{IN} = \pm10V$, $R_L = 5k\Omega$	–	0.005	–	–	0.007	–	% of 10V
Output Noise	$E_{N\,(RMS)}$	Wideband Noise 100Hz to 100kHz Sample Mode	–	40	–	–	50	–	μV_{RMS}

ELECTRICAL CHARACTERISTICS at $V_S = \pm15V$, $C_H = 0.005\mu F$, V_{LC} connected to ground, $0°C \le T_A \le +70°C$, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	SMP-10E SMP-11E MIN	SMP-10E SMP-11E TYP	SMP-10E SMP-11E MAX	SMP-10F SMP-11F MIN	SMP-10F SMP-11F TYP	SMP-10F SMP-11F MAX	SMP-11G MIN	SMP-11G TYP	SMP-11G MAX	UNITS
Zero-Scale Error	V_{ZS}	$V_{IN} = 0$, $V_{S/H} = 3.5V$, (Note 1)	–	0.75	2.0	–	1.0	4.0	–	2.7	10	mV
Input Bias Current	I_B	$V_{IN} = 0V$	–	50	90	–	80	140	–	120	250	nA
Leakage (Droop) Current	I_{DR}	SMP-10	–	0.05	0.25	–	0.080	0.65	–	–	–	nA
		SMP-11	–	0.5	1.8	–	0.6	2.8	–	0.7	5	
Droop Rate	dV_{CH}/dt	SMP-10	–	10	50	–	16	130	–	–	–	µV/ms
		SMP11	–	100	360	–	120	560	–	140	1000	
Voltage Gain	A_V	Sample Mode $V_{IN} = \pm10V$, $R_L = 5k\Omega$ or $V_{IN} = \pm5V$, $R_L = 2.5k\Omega$	0.99955	0.99976	–	0.99950	0.99972	–	0.99930	0.99970	–	V/V
Power Supply Rejection Ratio	PSRR	Sample Mode $V_S = \pm9V$ to $\pm18V$	80	90	–	75	80	–	70	90	–	dB
Logic Control Input Current	I_{LC}	$V_{LC} = 0V$	–	–1	–2	–	–1	–3	–	–1	–4	µA
Logic Input	$I_{S/H}$	Sample Mode $V_{S/H} = 0.6V$	–	–5	–15	–	–5	–15	–	–5	–15	µA
		Hold Mode $V_{S/H} = 5.0V$	–	0.2	–	–	0.2	–	–	0.2	–	nA
Differential Logic Threshold	V_{TH}		0.8	1.3	2.0	0.8	1.3	2.0	0.8	1.3	2.0	V


NOTE:
1. Measured 500µs after hold command.

ELECTRICAL CHARACTERISTICS at $V_S = \pm 15V$, $C_H = 0.005\mu F$, V_{LC} connected to ground, $-55°C \leq T_A \leq +125°C$, unless otherwise noted.


PARAMETER	SYMBOL	CONDITIONS		SMP-10A SMP-11A MIN	SMP-10A SMP-11A TYP	SMP-10A SMP-11A MAX	SMP-10 SMP-11B MIN	SMP-10 SMP-11B TYP	SMP-10 SMP-11B MAX	UNITS
Zero-Scale Error	V_{ZS}	$V_{IN} = 0$, $V_{S/H} = 3.5V$, (Note 1)		—	1.25	3.0	—	1.60	5.5	mV
Input Bias Current	I_B	$V_{IN} = 0V$		—	90	180	—	160	280	nA
Leakage (Droop) Current	I_{DR}	$T_A = -55°C$	SMP-10	—	0.050	0.50	—	0.080	1.22	nA
		$T_A = +125°C$	SMP-10	—	12	20	—	16	25	
		T_A = Full Range	SMP-11	—	12	20	—	16	25	
Droop Rate	dV_{CH}/dt	$T_A = -55°C$	SMP-10	—	10	100	—	16	250	μV/ms
		$T_A = +125°C$	SMP-10	—	2400	4000	—	3200	5000	
		T_A = Full Range	SMP-11	—	2400	4000	—	3200	5000	
Voltage Gain	A_V	Sample Mode $V_{IN} = \pm 10V$, $R_L = 5k\Omega$ or $V_{IN} = \pm 5V$, $R_L = 2.5k\Omega$		0.99950	0.99972	—	0.99940	0.99968	—	V/V
Power Supply Rejection Ratio	PSRR	Sample Mode $V_S = \pm 9V$ to $\pm 18V$		78	88	—	72	90	—	dB
Logic Control Input Current	I_{LC}	$V_{LC} = 0V$		—	−1	−3	—	−1	−5	μA
Logic Input	$I_{S/H}$	Sample Mode $V_{S/H} = 0.6V$		—	−5	−15	—	−5	−15	μA
		Hold Mode $V_{S/H} = 5.0V$		—	0.2	—	—	0.2	—	nA
Differential Logic Threshold	V_{TH}			0.6	1.3	2.0	0.6	1.3	2.0	V

NOTES:
1. Measured 500μs after hold command.

BURN-IN CIRCUIT

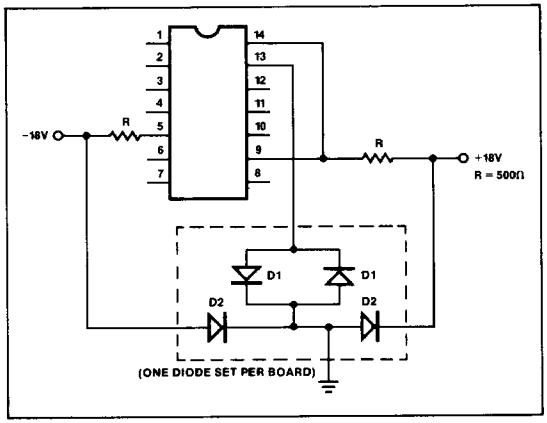


DICE CHARACTERISTICS



SMP-10

2. INPUT
3. NULL
4. NULL
5. NEGATIVE SUPPLY (SUBSTRATE)
7. OUTPUT
9. POSITIVE SUPPLY
11. HOLD CAPACITOR (C_H)
13. LOGIC THRESHOLD CONTROL (V_{LC})
14. SAMPLE/HOLD COMMAND

DIE SIZE 0.088 × 0.083 inch, 7304 sq. mils (2.235 × 2.108 mm, 4.711 sq. mm)



SMP-11

2. INPUT
3. NULL
4. NULL
5. NEGATIVE SUPPLY (SUBSTRATE)
7. OUTPUT
9. POSITIVE SUPPLY
11. HOLD CAPACITOR (C_H)
13. LOGIC THRESHOLD CONTROL (V_{LC})
14. SAMPLE/HOLD COMMAND

WAFER TEST LIMITS at $V_S = \pm 15V$, $C_H = 0.005\mu F$, V_{LC} connected to ground, $T_A = 25°C$, unless otherwise noted.

PARAMETER	SYMBOL	CONDITIONS	SMP-10N SMP-11N LIMIT	SMP-10G SMP-11G LIMIT	UNITS
Zero-Scale Error	V_{ZS}	$V_{IN} = 0$, $V_{S/H} = 3.5V$ Hold Mode, (Note 2)	1.5	3.0	mV MAX
Input Bias Current	I_B	$V_{IN} = 0V$	60	90	nA MAX
Leakage (Droop) Current	I_{DR}	SMP-10 SMP-11	0.10 1	0.25 2.5	nA MAX
Droop Rate	dV_{CH}/dt	SMP-10 SMP-11	20 200	50 500	μV/ms MAX
Voltage Gain	A_V	Sample Mode $V_{IN} = \pm 10V$ or $V_{IN} = \pm 5V$	0.99963	0.99953	V/V MIN
Hold Capacitor Charging Current	I_{CH}	$V_{IN} - V_{OUT} \geq \pm 3V$	30	20	mA MIN
Input Voltage Range and/or Output Voltage Swing		$R_L = 2.5k\Omega$	±11	±10.5	V MIN
Power Supply Rejection Ratio	PSRR	Sample Mode $V_S = \pm 9V$ to $\pm 18V$	82	77	dB MIN
Power Consumption	P_D	Sample Mode $V_{IN} = 0$	180	210	mW MAX
Logic Control Input Current	I_{LC}	$V_{LC} = 0V$	−2	−3	μA MAX
Logic Input	$I_{S/H}$	Sample Mode $V_{S/H} = 0.6V$ Hold Mode $V_{S/H} = 5V$	−15 0	−15 0	μA MAX nA MAX
Differential Logic Threshold	V_{TH}	$V_{LC} = 0$	2.0 0.8	2.0 0.8	V MAX V MIN

NOTES:
1. Measured 500μs after hold command.


Electrical tests are performed at wafer probe to the limits shown. Due to variations in assembly methods and normal yield loss, yield after packaging is not guaranteed for standard product dice. Consult factory to negotiate specifications based on dice lot qualification through sample lot assembly and testing.

TYPICAL ELECTRICAL CHARACTERISTICS at $V_S = \pm 15V$, $C_H = 0.005\mu F$, V_{LC} connected to ground, $T_A = 25°C$, unless otherwise noted.


PARAMETER	SYMBOL	CONDITIONS	SMP-10N SMP-11N TYPICAL	SMP-10G SMP-11G TYPICAL	UNITS
Acquisition Time	t_{aq}	10V step to 0.1% of final value	3.5	3.5	μs
Aperture Time	t_{ap}		50	50	ns
Charge Transfer	Q_t	$V_{IN} = 0$, $V_{S/H} = 3.5V$	5	5	pC
Slew Rate	SR	$V_{IN} = \pm 10V$, $R_L = 2.5k\Omega$	10	10	V/μs

TYPICAL PERFORMANCE CHARACTERISTICS


CHANGE IN HOLD STEP vs S/H $\frac{dV}{dt}$

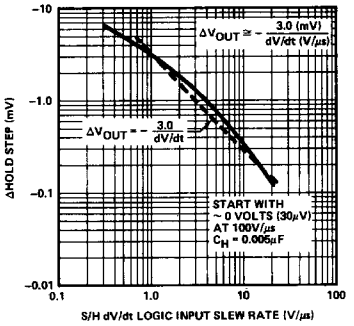


AMPLITUDE CHANGE IN HOLD STEP vs INPUT VOLTAGE




HOLD MODE POWER SUPPLY REJECTION




SMP-10 DROOP RATE vs TEMPERATURE

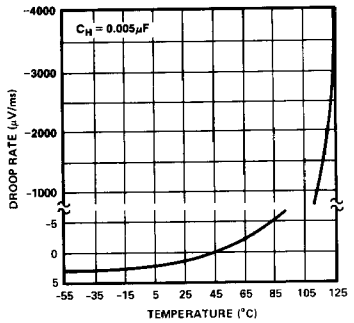


SMP-11 DROOP RATE vs TEMPERATURE

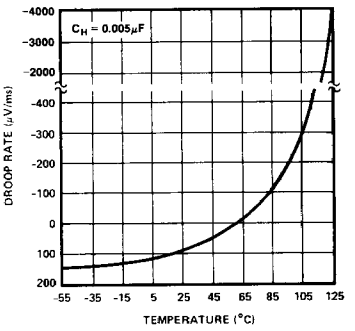


DROOP CURRENT vs TEMPERATURE

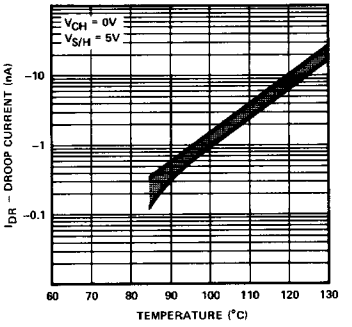


INPUT BIAS CURRENT vs TEMPERATURE



ACQUISITION TIME vs HOLD CAPACITOR




LOGIC INPUT CURRENT




TYPICAL PERFORMANCE CHARACTERISTICS


GAIN ERROR




POWER DISSIPATION vs INPUT FREQUENCY = V_p SIN ωT




MAXIMUM INPUT SIGNAL AMPLITUDE vs FREQUENCY




OUTPUT RESISTANCE vs FREQUENCY




OUTPUT WIDEBAND NOISE vs BANDWIDTH (0.1Hz TO FREQUENCY INDICATED)

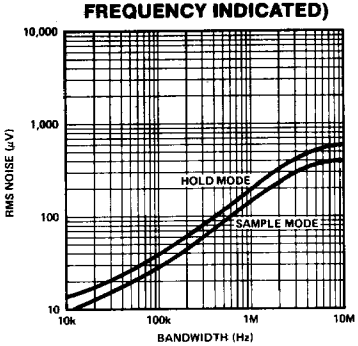


HOLD CAPACITOR CHARGING CURRENT vs INPUT OUTPUT VOLTAGE




TOTAL HARMONIC DISTORTION vs FREQUENCY

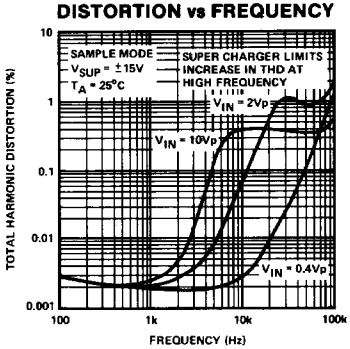

SAMPLE MODE POWER SUPPLY REJECTION




POWER SUPPLY CURRENT vs POWER SUPPLY VOLTAGE




4

SMP-10/SMP-11 ACQUISITION TIMES


ACQUISITION TIME −10V to 0V




ACQUISITION TIME +10V to 0V




ACQUISITION TIME −1.0V to 0V




ACQUISITION TIME +1.0V to 0V



ACQUISITION TIME −100mV to 0V



ACQUISITION TIME +100mV to 0V




APPLICATIONS INFORMATION


During the null adjustment, the amplifier should be switched continuously between the "sample" and "hold" mode. The error should be adjusted to read zero when the unit is in the "hold" mode. In this way, both offset voltage errors and charge transfer errors are adjusted to zero.

As shown in the Figure, the sample/hold mode control is accomplished by steering the current (I_1) through Q1 or Q2, thus providing high-speed switching and a predictable logic threshold. For TTL and DTL interface, simply ground V_{LC} (Pin 13). For CMOS, HTL and HNIL interface, the appropriate

ZERO-SCALE NULL ADJUSTMENT

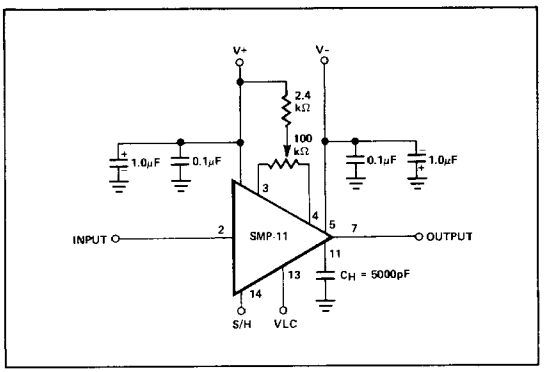


LOGIC CONTROL

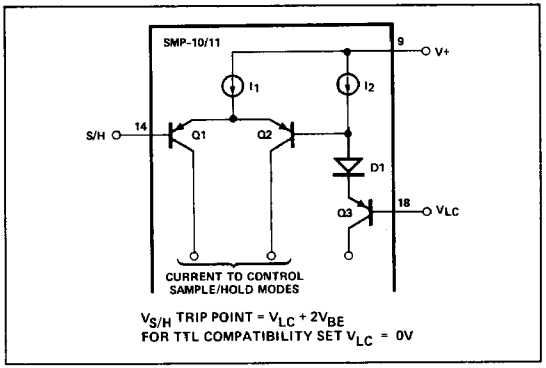

threshold voltage, allowing for 2 diode drops for D1 and V_{BE} of Q3, should be applied to V_{LC}.

For proper operation, the V_{LC} (logic control) must always be at least 3.5V below the positive supply and 2.0V above the negative supply.

Sample-and-hold control voltage (S/H) must always be at least 2.8V above the negative supply.

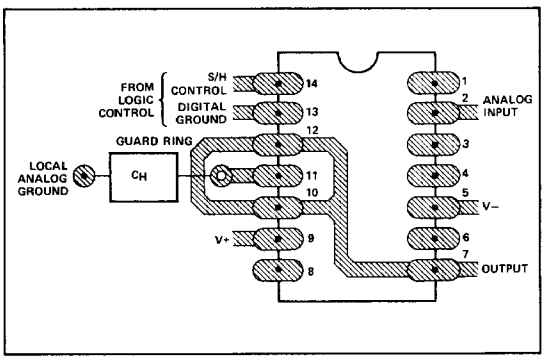

GUARDING AND GROUNDING LAYOUT

The use of a ground plane is strongly recommended to minimize ground path resistances. Separate analog and digital grounds should be used, and it is advisable to keep these two ground systems isolated until they are tied back to the common system ground. Digital currents should not flow back to the system ground through the analog ground path.

HOLD CAPACITOR RECOMMENDATIONS

The hold capacitor (C_H) acts as a memory element and also as a compensating capacitor for the sample-and-hold amplifier. For stable operation, a minimum value of 2000pF is recommended, with no limit set for the maximum value. The devices have been internally trimmed for C_H=5000pF. Other values of C_H will cause a zero-scale shift, which can be calculated from the following equation:

$$\Delta V_{ZS}(mV) = \frac{5\,(pC) \times 10^3}{C_H\,(pF)} - 1$$

The hold capacitor should have very high insulation resistance and low dielectric absorption. For temperatures below 85°C, polystyrene capacitors are recommended, while teflon capacitors are recommended for higher temperature applications.

4