MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING ★ V3-601
CK-G0100

(M) V3-601 ISSUE 8
REPLACES
RELEASE NO.
CHECK

V3-601
M
DRAWING NUMBER
ISSUE

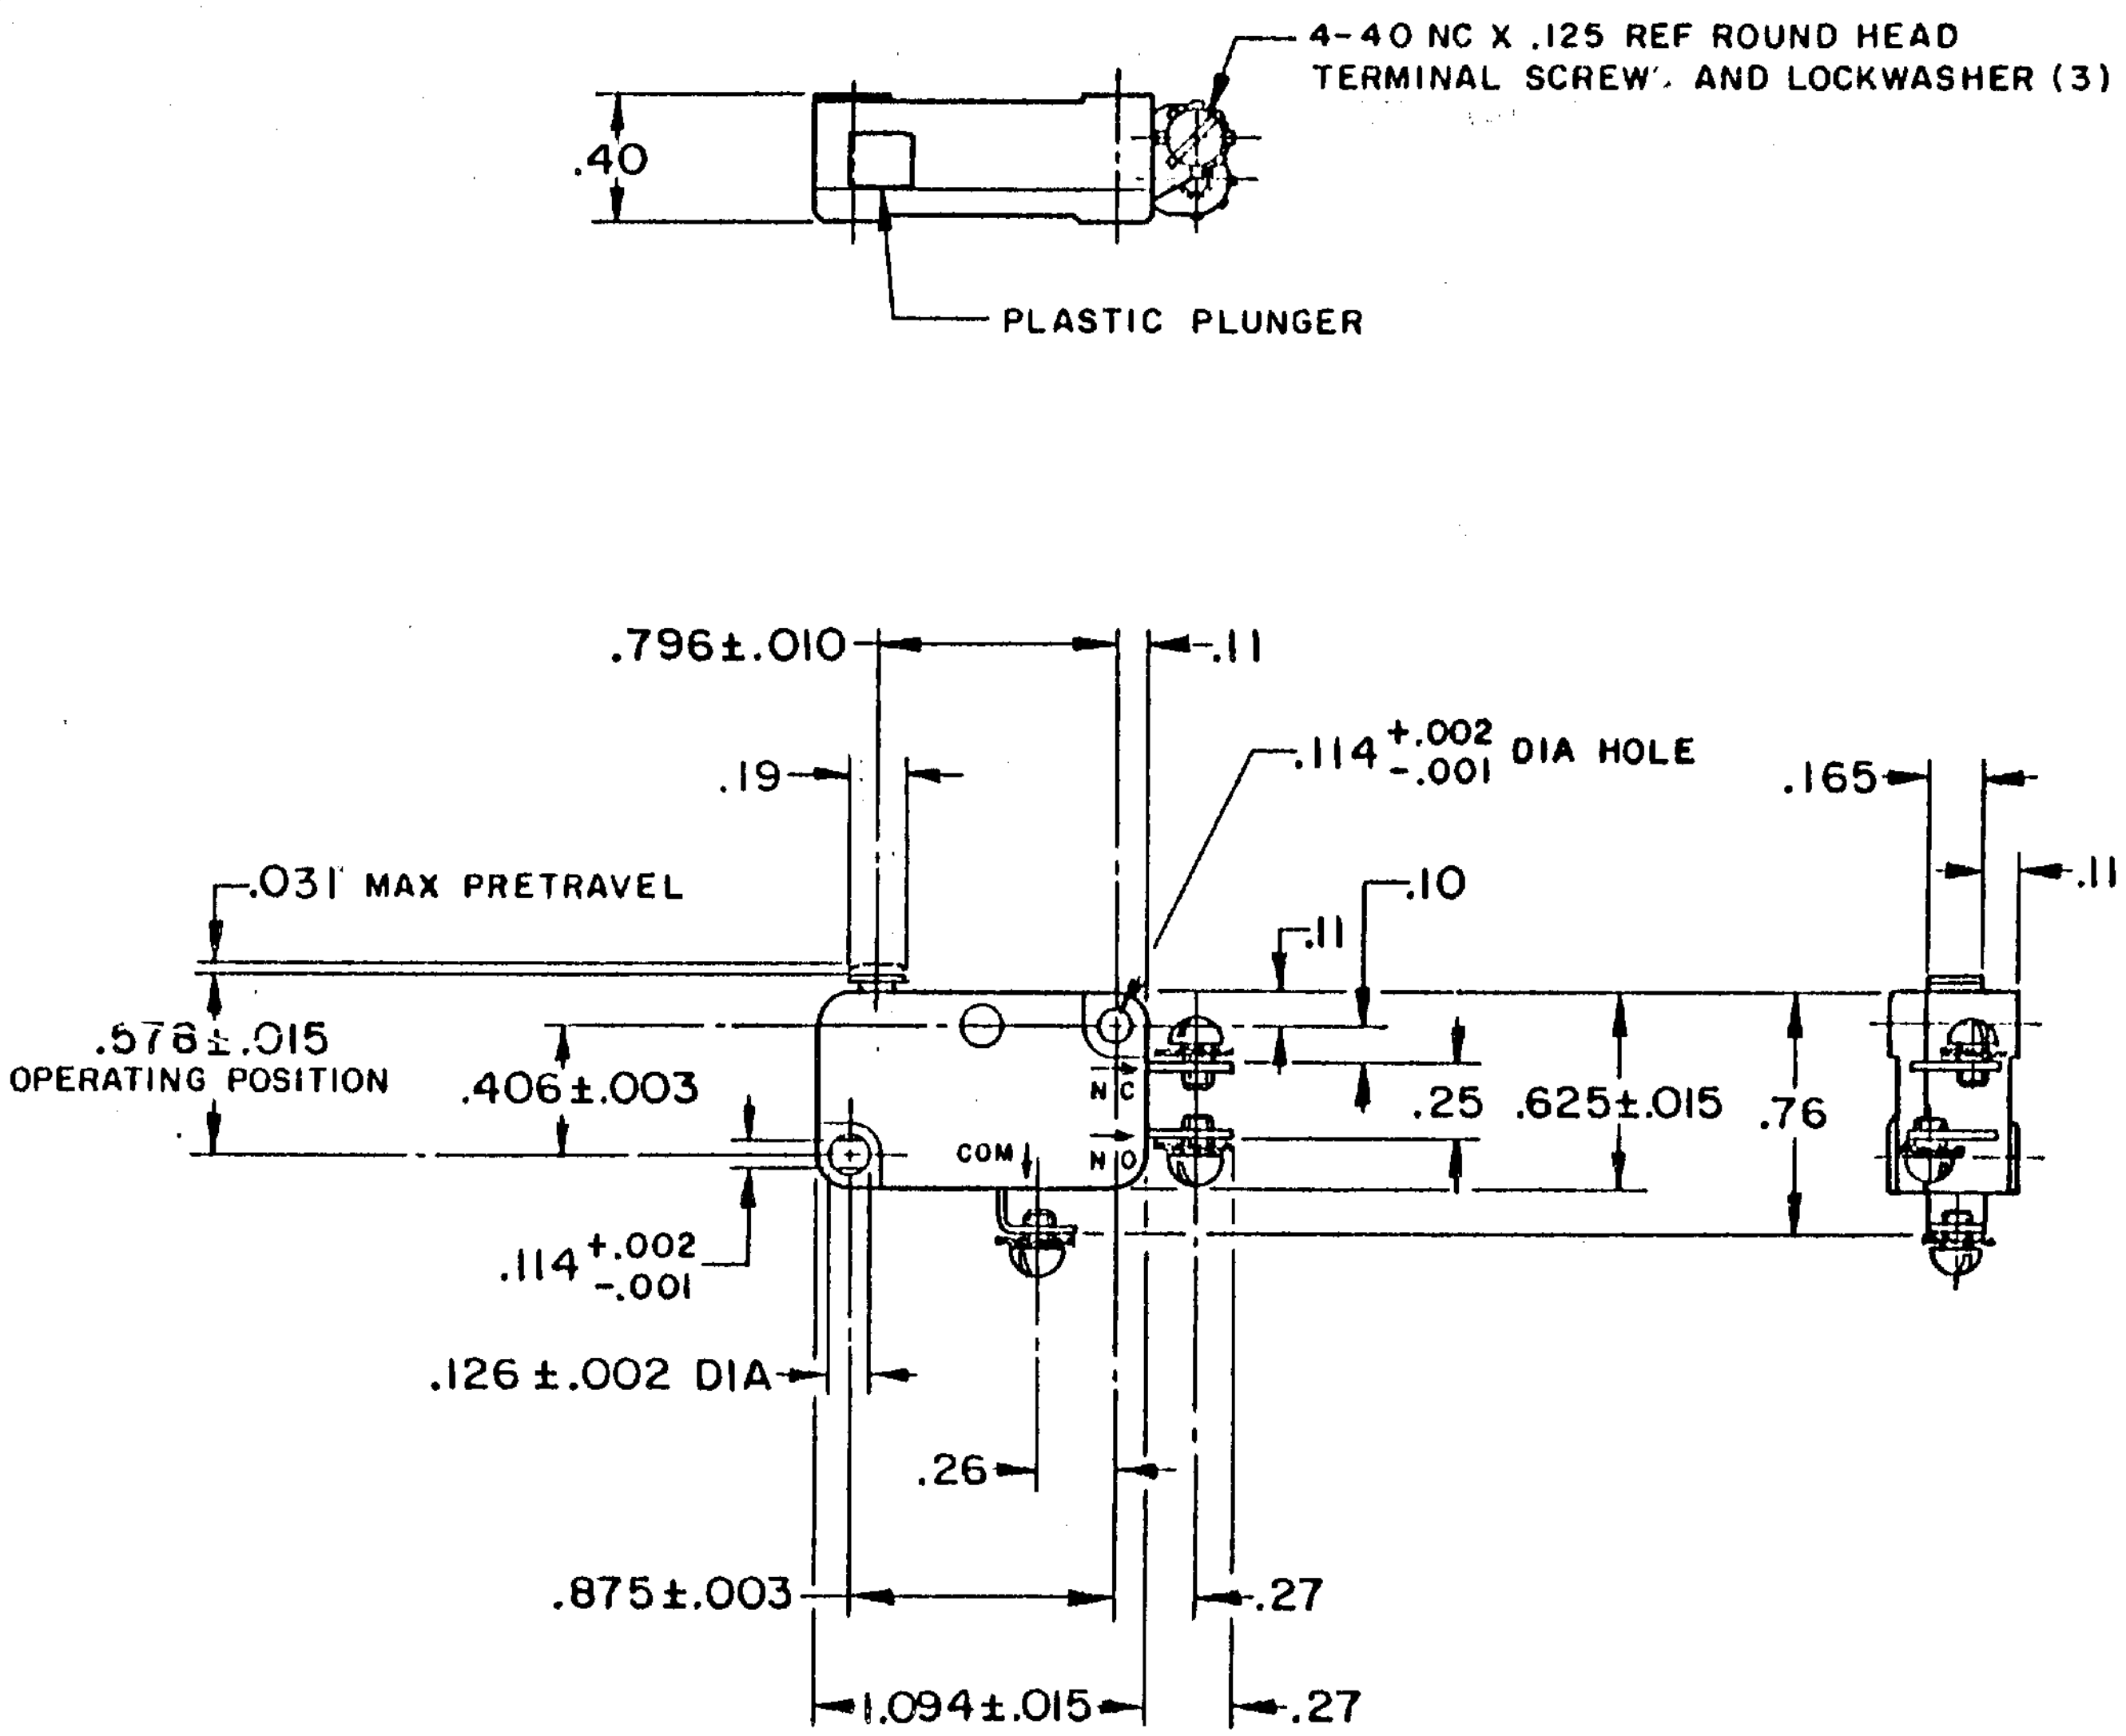

REVISIONS

A	CO 15698 MBF 9 MAR 61
B	CO21688 MBF 3 OCT 66
C	CO24941 MBS 3 DEC 68
D	CO26075 MBS 27 AUG 69
E	CO26511 RER 21 OCT 69
F	CO39182 WLW 18 FEB 78
G	CO 56987 SMA 1 OCT 85
H	CO73764 DHD 30 NOV 92

CHECK
DAW 10 MAR '61
CHECK
DRAWN MBF 9 MARCH 61

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — 6-14 OZ
RELEASE TRAVEL — .005-.017
RELEASE FORCE — 4 OZ MIN
DIFFERENTIAL TRAVEL — .006-.016
OVERTRAVEL — .010-.024
FREE POSITION — .625 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L86
15.1A 1/3HP 125, 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"

SCALE FULL
DO NOT SCALE PRINT.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .023 LB MAX

FO-5037B