

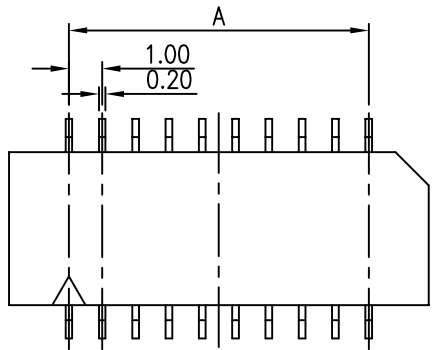


修 订	标 记	修 改 描 述	签 名	日 期
REV	NO	NEW DRG		2016-03-12

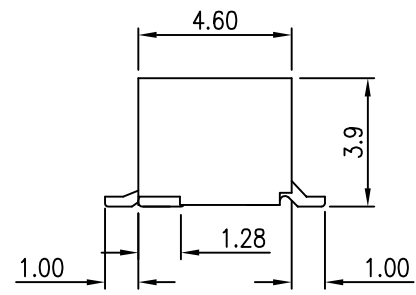



NOTES:

- MATERIAL:
HOUSING: HIGHT-TEMP PLASTIC,UL 94-V0,COLOR:NATURE OR BLACK;
CONTACT: COPPER ALLOY;
LEG: COPPER ALLOY;
- PLATING:
CONTACT: GOLD PLATED ON NICKEL OVERALL.
LEG: MATT TIN PLATED ON NICKEL OVERALL.
- RATING:
CURRENT RATING: 1.0A AC/DC
VOLTAGE RATING: 50V AC/DC
OPERATING TEMPERATURE : -40°C~+85°C;
- PART NO:

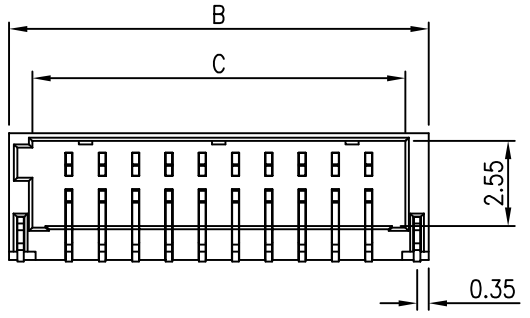

CKT.	DIM A	DIM B	DIM C
6	2.00	5.60	4.20
8	3.00	6.60	5.20
10	4.00	7.60	6.20
12	5.00	8.60	7.20
14	6.00	9.60	8.20
16	7.00	10.60	9.20
18	8.00	11.60	10.20
20	9.00	12.60	11.20
22	10.00	13.60	12.20
24	11.00	14.60	13.20
26	12.00	15.60	14.20
28	13.00	16.60	15.20
30	14.00	17.60	16.20
32	15.00	18.60	17.20
34	16.00	19.60	18.20
36	17.00	20.60	19.20
38	18.00	21.60	20.20
40	19.00	22.60	21.20
42	20.00	23.60	22.20
44	21.00	24.60	23.20
46	22.00	25.60	24.20
48	23.00	26.60	25.20
50	24.00	27.60	26.20

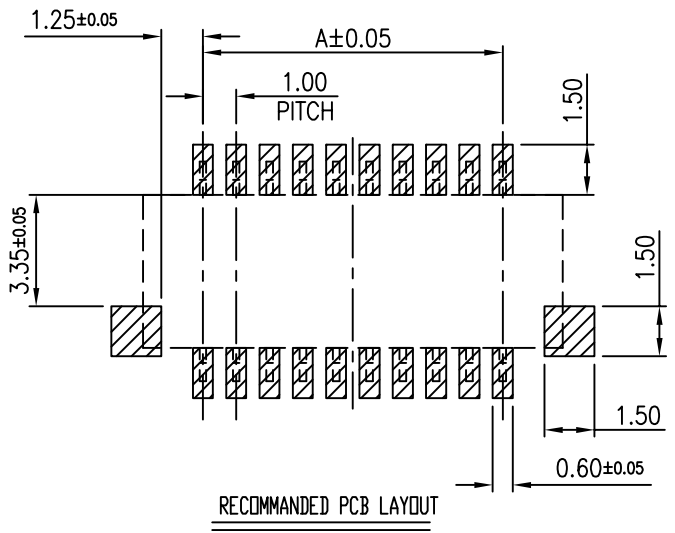



深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
电话: 0755-27111225 传真: 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表		TITLE: 产品名称: SHD1.0双排卧贴针座H=3.9	
X.X ±0.30	X.X* ±3'	APPD: 核准:	PART NO: 产品编号: HDGC1002WRA-S-2XnP
X.XX ±0.20	X.XX* ±2'	CHECK: 校对: 王建业	DATE
X.XXX ±0.10	X.XXX* ±1'	DRAW: 绘图: 黄艳兰	SCALE
			UNIT
			CODE NUMBER
		2016-03-12	1:1
			mm
			A001