



# 827LMB160M2CF

SNAP-IN/ SNAP MOUNT

Parts are RoHS compliant

Date code when parts became RoHS: 1404

## ELECTRICAL SPECIFICATIONS

Capacitance: 820 uF

Dissipation Factor: 0.15 Max at 120 Hz and 20°C

Temperature Range: -25°C to +105°C

Impedance: N/A

Tolerance: -20 %, +20 %

WVDC: 160 Volts DC

SVDC: 200 Volts DC

Ripple Current: 2.04 A at 120 Hz and 105°C

Impedance Ratios:-25°C/20°C 8 and -40°C/20°C - -

Leakage Current:  $3\sqrt{CV}$

1086.6 uA after 5 Minutes

Load Life: 3000 hours at 105°C with 100 % of rated voltage and with 100 % of rated ripple current

Capacitance Change:  $\leq 20\%$  of initial measured value

Dissipation Factor:  $\leq 200\%$  of maximum specified value

Leakage Current:  $\leq 100\%$  of maximum specified value

Frequency Multipliers:

Temperature Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.8	1	1	1.25	1.47	1.47

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
2	1.9	1.7	1.8	1.4	1.4	1	0

## PHYSICAL DIMENSIONS

Diameter (D): 25 mm + 1 mm

Length (L): 40 mm + 2 mm


Lead Spacing (S): 10 mm +/- 0.1 mm

Coating: BrownPET sleeving

Lead Wire Diameter (d): 1.5 mm +/- 0.5 mm

Lead Length: 4 mm +/- 1 mm

Lead Finish: Matte Tin

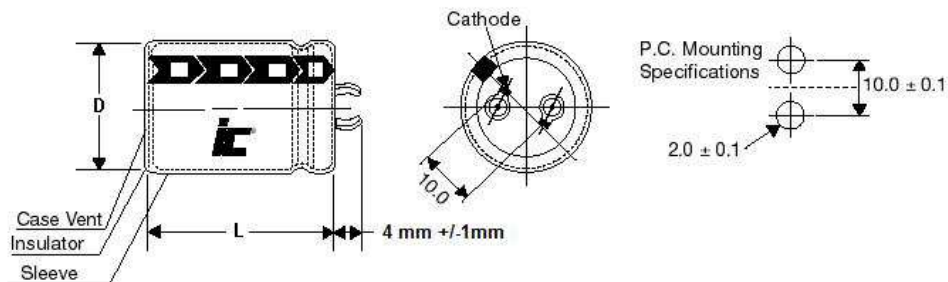

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847) 675-1760 FAX (847) 673-2850

Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, [www.ilcap.com.hk](http://www.ilcap.com.hk)

© Copyright 2019 Illinois Capacitor. An affiliate of Cornell Dubilier. All Rights Reserved