



# EC7C SERIES

## 40 WATT 2:1 INPUT RANGE

### DC-DC CONVERTERS



## FEATURES

- \* 40W Isolated Output
- \* 2" X 2" Six-Sided Shield Metal Case
- \* High Efficiency Up to 93%
- \* Fixed 350KHz Switching Frequency
- \* 2 : 1 Input Range
- \* Regulated Outputs
- \* Continuous Short Circuit Protection
- \* CE Mark Meets 2004/108/EC
- \* UL60950-1 Approval



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	Capacitor Load max.
			MIN.	MAX.	NO LOAD	FULL LOAD		
EC7C-12S25	9 -18 VDC	2.5 VDC	0 mA	10000mA	200 mA	2354 mA	88.5	10000uF
EC7C-12S33	9 -18 VDC	3.3 VDC	0 mA	10000mA	200 mA	3090 mA	89	10000uF
EC7C-12S05	9 -18 VDC	5 VDC	0 mA	8000mA	200 mA	3683 mA	90.5	8000uF
EC7C-12S12	9 -18 VDC	12 VDC	0 mA	3333mA	200 mA	3643 mA	91.5	3300uF
EC7C-12S15	9 -18 VDC	15 VDC	0 mA	2666mA	200 mA	3642 mA	91.5	2700uF
EC7C-12D12	9 -18 VDC	±12 VDC	90 mA	±1800mA	100 mA	4022 mA	89.5	1800uF
EC7C-12D15	9 -18 VDC	±15 VDC	70 mA	±1400mA	100 mA	3867 mA	90.5	1400uF
EC7C-12D3305	9 -18 VDC	3.3/5.0 VDC	0 mA	10A/7.5A	100 mA	3727 mA	89 <sup>(3)</sup>	7270uF/7270uF
EC7C-12T3312	9 -18 VDC	3.3/±12 VDC	0.6A/±40 mA	6A/±0.4A	200 mA	2768 mA	88.5	6000uF/400uF
EC7C-12T3315	9 -18 VDC	3.3/±15 VDC	0.6A/±30 mA	6A/±0.3A	200 mA	2712 mA	88.5	6000uF/330uF
EC7C-12T0512	9 -18 VDC	5.0/±12 VDC	0.6A/±40 mA	6A/±0.4A	200 mA	3729 mA	88.5	6000uF/400uF
EC7C-12T0515	9 -18 VDC	5.0/±15 VDC	0.6A/±30 mA	6A/±0.3A	200 mA	3611 mA	90	6000uF/330uF
EC7C-24S25	18 - 36 VDC	2.5 VDC	0 mA	10000mA	100 mA	1157 mA	90	10000uF
EC7C-24S33	18 - 36 VDC	3.3 VDC	0 mA	10000mA	100 mA	1519 mA	90.5	10000uF
EC7C-24S05	18 - 36 VDC	5 VDC	0 mA	8000mA	110 mA	1812 mA	92	8000uF
EC7C-24S12	18 - 36 VDC	12 VDC	0 mA	3333mA	100 mA	1792 mA	93	3300uF
EC7C-24S15	18 - 36 VDC	15 VDC	0 mA	2666mA	100mA	1792 mA	93	2700uF
EC7C-24D12	18 - 36 VDC	±12 VDC	90 mA	±1800mA	100 mA	1967 mA	91.5	1800uF
EC7C-24D15	18 - 36 VDC	±15 VDC	70 mA	±1400mA	100 mA	1902 mA	92	1400uF
EC7C-24D3305	18 - 36 VDC	3.3/5.0 VDC	0 mA	10A/7.5A	50 mA	1843 mA	90 <sup>(3)</sup>	7270uF/7270uF
EC7C-24T3312	18 - 36 VDC	3.3/±12 VDC	0.6A/±40 mA	6A/±0.4A	100 mA	1361 mA	90	6000uF/400uF
EC7C-24T3315	18 - 36 VDC	3.3/±15 VDC	0.6A/±30 mA	6A/±0.3A	100 mA	1333 mA	90	6000uF/330uF
EC7C-24T0512	18 - 36 VDC	5.0/±12 VDC	0.6A/±40 mA	6A/±0.4A	100 mA	1813 mA	91	6000uF/400uF
EC7C-24T0515	18 - 36 VDC	5.0/±15 VDC	0.6A/±30 mA	6A/±0.3A	100 mA	1786 mA	91	6000uF/330uF
EC7C-48S25	36 - 75 VDC	2.5 VDC	0 mA	10000mA	50 mA	585 mA	89	10000uF
EC7C-48S33	36 - 75 VDC	3.3 VDC	0 mA	10000mA	50 mA	764 mA	90	10000uF
EC7C-48S05	36 - 75 VDC	5 VDC	0 mA	8000mA	60 mA	906 mA	92	8000uF
EC7C-48S12	36 - 75 VDC	12 VDC	0 mA	3333mA	60 mA	896 mA	93	3300uF
EC7C-48S15	36 - 75 VDC	15 VDC	0 mA	2666mA	60 mA	906 mA	92	2700uF
EC7C-48D12	36 - 75 VDC	±12 VDC	90 mA	±1800mA	50 mA	989 mA	91	1800uF
EC7C-48D15	36 - 75 VDC	±15 VDC	70 mA	±1400mA	50 mA	962 mA	91	1400uF
EC7C-48D3305	36 - 75 VDC	3.3/5.0 VDC	0 mA	10A/7.5A	50 mA	926 mA	89.5 <sup>(3)</sup>	7270uF/7270uF
EC7C-48T3312	36 - 75 VDC	3.3/±12 VDC	0.6A/±40 mA	6A/±0.4A	50 mA	684 mA	89.5	6000uF/400uF
EC7C-48T3315	36 - 75 VDC	3.3/±15 VDC	0.6A/±30 mA	6A/±0.3A	50 mA	682 mA	88	6000uF/330uF
EC7C-48T0512	36 - 75 VDC	5.0/±12 VDC	0.6A/±40 mA	6A/±0.4A	50 mA	932 mA	88.5	6000uF/400uF
EC7C-48T0515	36 - 75 VDC	5.0/±15 VDC	0.6A/±30 mA	6A/±0.3A	50 mA	903 mA	90	6000uF/330uF

NOTE: 1. Nominal Input Voltage 12, 24, 48 VDC

2. The total power of EC7C-12D3305, EC7C-24D3305 and EC7C-48D3305 should not be exceeded 40W.

3. The efficiency is measured with rated load current (3.3V/6A, 5V/4A).

# SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

## INPUT SPECIFICATIONS:

Input Voltage Range  
 12V ..... 9-18V, 24V ..... 18-36V, 48V ..... 36-75V

Input Surge Voltage (100ms max.)  
 12V ..... 25Vdc max., 24V ..... 50Vdc max., 48V ..... 100Vdc max.

Under voltage lockout  
 12Vin: power up ..... 8.8V, power down ..... 8.0V  
 24Vin: power up ..... 17V, power down ..... 16V  
 48Vin: power up ..... 34V, power down ..... 32V

Positive/Negative Logic Remote On/Off (note5&6)

Input Filter ..... PI Type

## OUTPUT SPECIFICATIONS:

Voltage Accuracy ..... Single/Dual ..... ±1.5% max.  
 Dual positive ..... 3.3V±1.5% max., 5V±3% max.  
 Triple ..... Main ±1.5% max., Auxiliary ±3.0% max.

Voltage Balance(Dual) ..... ±2.0% max.

Transient Response: 75% - 100% Step Load Change (Main Output)  
 Error Band ... ±5% Vout nominal, Recovery Time ..... < 300us

Output Voltage Adjustment Range ... Single/Dual Vo±10%, Dual Positive±5%

Ripple & Noise, 20MHz BW (Measured with 0.1uF MLCC)  
 2.5V&3.3V&5V ..... 50mVpp,max., 12V&15V ..... 75mVpp max.  
 Dual ±12V ..... 120mVpk-pk, max., ±15V ..... 150mVpk-pkmax.  
 Dual positive +3.3V /+5V ..... 100mVpk-pk max.

Temperature Coefficient ..... ±0.02%/°C

Line Regulation (note1) ..... Single/Dual/Dual positive ..... ±0.5% max.  
 Triple ..... Main ..... ±1.0% max., Auxiliary ..... ±3.0% max.

Load Regulation (note2) ..... Single ±0.5% max., Dual ±1.0% max.  
 Dual positive (note3) ..... 3.3V ±1.5% max., 5V±4% max.  
 Triple ... Main ..... ±1.0% max., Auxiliary ..... ±4.0% max.

Cross Regulation (note 4) ..... +3.3V±1.0% max. +5V±4.0% max.

Over voltage Protection (Zener Diode Clamp) ..... 2.5V ..... 3.6Vdc typ.  
 3.3V ..... 3.9Vdc typ., 5V ..... 6.2Vdc typ.  
 12V ..... 15Vdc typ., 15V ..... 18Vdc typ.

Output Current Limit, % Nominal Output ..... 110%-140%


Output Short Circuit Protection ..... Continuous (hiccup mode)

Start up time ..... 10ms typ.

## NOTE:

1. Measured from high line to low line(dual positive at rated load).
2. Measured from full load to 10% load.
3. Measured from max. load to zero load, other output at zero load.
4. Measured from max. load to 10% load, other output at 10% load.
5. Logic compatibility .... CMOS or Open Collector TTL, ref. to -Vin  
 Module On ..... >3.5Vdc to 75Vdc or Open Circuit  
 Module Off ..... <1.8Vdc.
6. Suffix "N" to the model number with negative logic remote on/off  
 Module On ..... <1.8Vdc,  
 Module Off ..... >3.5Vdc to 75Vdc or Open Circuit
7. If +/-Sense is not being used, the +sense should be connected to +Vout and likewise the -sense should be connected to -Vout.
8. Maximum case temperature under any operating condition should not be exceeded 100°C.

## EXTERNAL OUTPUT TRIM

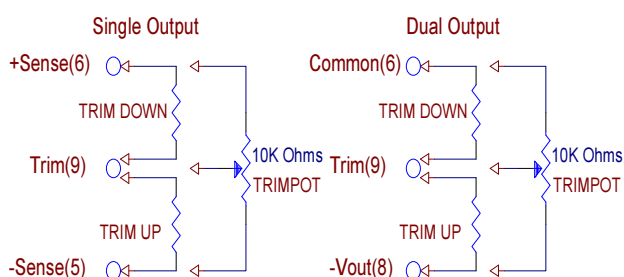

## GENERAL SPECIFICATIONS:

Efficiency..... See Table

Isolation Voltage ..... Input/Output ..... 1500VDC max.

Isolation Resistance ..... 10<sup>9</sup> ohm min.

Isolation Capacitance ..... 1000pF typ.

Switching Frequency ..... 350KHz typ.

Operating Ambient Temperature ..... -40°C to +85°C

De-rating, Above 60°C ..... Linearly to Zero power at 100°C

Case Temperature (note8) ..... 100°C max.

Cooling ..... Natural Convection

Storage Temperature ..... -55°C to +125°C

Humidity ..... 95% RH max. Non condensing

MTBF... MIL-STD-217F, GB, 25°C, Full Load  
 XXD3305 ... 500Khrs typ., Others ..... 700Khrs typ.


Thermal Shutdown, Case Temperature ..... 110°C Typical

Dimensions ..... 2.00×2.00×0.40 inches(50.8×50.8×10.2 mm)

Case Material ..... Black Coated Copper with Non-Conductive Base

Weight ..... 65g

Typical Derating curve for Natural Convection

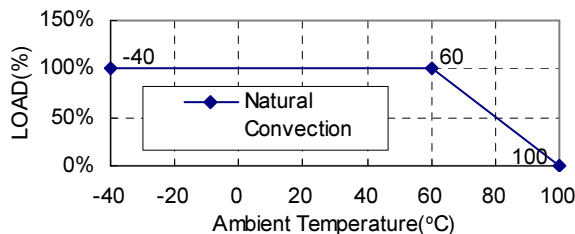

PIN CONNECTION				
Pin	Single	Dual	Dual Positive	Triple
1	+V Input	+V Input	+V Input	+V Input
2	- V Input	- V Input	- V Input	- V Input
3	On / Off	On / Off	On / Off	On / Off
4	NC	No Pin	+3.3Vout	+Aux. Out
5	- Sense	+V Output	Com(3.3V RTN)	Common
6	+Sense	Common	Trim	- Aux. Out
7	+V Output	Common	NC	+V Output
8	- V Output	- V Output	+5V Output	- V Output (Common)
9	Trim	Trim	Com(5V RTN)	NC

\*NC : NO CONNECTION WITH PIN

## Case C Dimensions:

NOTE: Pin Size is 0.02±0.002 Inch(0.5±0.05mm)DIA

All Dimensions In Inches(mm)

Tolerance Inches: X.XX=±0.02, X.XXX=±0.010

Millimeters: X.X=±0.5, X.XX=±0.25

