

**IE-SW-VL16T-16TX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

- Wide ranges of variations with 5 to 16 ports
- Variations for Gigabit Ethernet
- Two redundant power inputs 12/24/48 V DC
- Models with copper and fibre-optic interface (multimode and singlemode)
- Extensive approvals: CE, FCC, cULus, Class I Div. 2 / ATEX Zone 2, DNV-GL

**General ordering data**

Version	Network switch, unmanaged, Fast Ethernet, Number of ports: 16x RJ45, IP30, -40 °C...75 °C
Order No.	<a href="#">1286590000</a>
Type	IE-SW-VL16T-16TX
GTIN (EAN)	4050118077414
Qty.	1 pc(s).

Creation date November 4, 2021 1:25:01 AM CET

Catalogue status 22.10.2021 / We reserve the right to make technical changes.

## IE-SW-VL16T-16TX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	105 mm	Depth (inches)	4.134 inch
Height	135 mm	Height (inches)	5.315 inch
Width	80.5 mm	Width (inches)	3.169 inch
Net weight	1,140 g		

## Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...75 °C
Humidity	5 to 95 % (non-condensing)		

## Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

## EMC conformity and approvals

EMC standards	EN 55032, EN 55024, CISPR 32, FCC Part 15 Subpart B Class A, IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m, IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV, IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV, IEC 61000-4-6 CS: 10 V, IEC 61000-4-8	Explosive risk zone	UL/cUL, Class I, Division 2, Groups A, B, C and D, ATEX Zone 2 Ex nA nC IIC T4 Gc
Free fall	According to IEC 60068-2-32	Safety standard	UL508, UL 60950-1, EN 60950-1
Ship use	DNV-GL	Shock	according to IEC 60068-2-27
Vibration	according to IEC 60068-2-6		

## Environmental conditions

Humidity	5 to 95 % (non-condensing)	Operating temperature, max.	75 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-40 °C		

## Guarantee

Time interval	5 years
---------------	---------

## IE-SW-VL16T-16TX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Interfaces

Function DIP switch	Port surveillance, Broadcast storm protection enable/disable	LED indicator	PWR1, PWR2, FAULT, 10/100M (TP-Port)
Number of ports	16x RJ45	RJ45 ports	10/100BaseT(X), auto negotiation, Full-/half- duplex mode, Auto MDI/ MDI-X port
Signalling contact	1 relay output with a current capacity of 1 A at 24 V DC		

## MTBF

MTBF	According to Standard	MIL-HDBK-217F, GB 25°C
	Operating time (hours), min.	257,000 h

## Power supply

Connection type	1 removable 6-pin terminal block		
Current consumption	0.27 A at 24 V		
Overload current protection	1.6 A		
Reverse polarity protection	Available		
Voltage supply	12/24/48 V DC, 2 redundant inputs		
Voltage supply range	Voltage type	DC	
	Voltage, min.	9.6 V	
	Voltage, max.	60 V	

## Switch characteristics

Bandwidth backplane	3.2 Gbps	MAC table size	4 K
Packet buffer size	1.25 Mbit		

## Technical data

Housing main material	metal	Protection degree	IP30
Speed	Fast Ethernet	Switch	unmanaged
Type of mounting	DIN rail, Panel (with optional mounting kit)		

## Technology

Data switching	Store and Forward	Flow control	IEEE 802.3x flow control, Back pressure flow control
Standard	IEEE 802.3 for 10BaseT, IEEE 802.3u for 100BaseT(X) and 100BaseFX, IEEE 802.3x for flow control		

## Classifications

ETIM 6.0	EC000734	ETIM 7.0	EC000734
ETIM 8.0	EC000734	ECLASS 9.0	19-17-01-06
ECLASS 9.1	19-17-01-06	ECLASS 10.0	19-17-04-02
ECLASS 11.0	19-17-04-02		

Creation date November 4, 2021 1:25:01 AM CET

Catalogue status 22.10.2021 / We reserve the right to make technical changes.

3

## IE-SW-VL16T-16TX


**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Technical data

### Approvals

Approvals

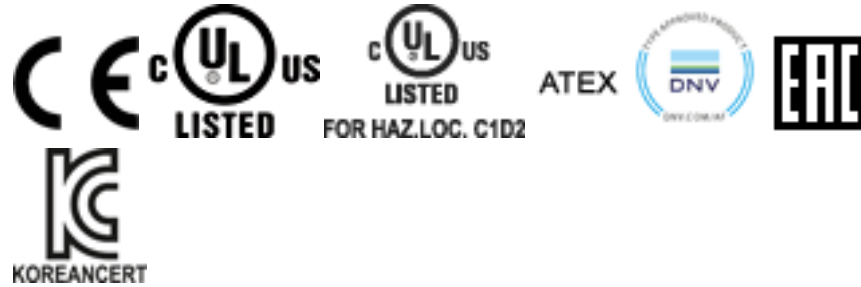

ROHS	Conform
UL File Number Search	E230683

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">DNV-GL certificate</a> <a href="#">ATEX certificate</a> <a href="#">KC certificate</a> <a href="#">EU Declaration of Conformity</a>
Engineering Data	<a href="#">STEP</a>
User Documentation	<a href="#">Hardware Installation Guide</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	