
CATALOG NUMBER	MATERIAL NUMBER	CABLE RANGE	NOMINAL ROD DIAMETER	LENGTH "M"	LENGTH "B"	APPROXIMATE BREAK STRENGTH* (LBS/N)	UL LISTED	CSA APPROVED	PRODUCT SELECTION NUMBER
35910	1300950155	.50-.61 / 12.7-15.5	.56 / 14.2	16.00±2.00 / 406.4±50.8	5.0±0.50 / 127±13	3400 / 15124	NO	YES	PL050-2
35911	1300950156	.62-.74 / 15.7-18.8	.68 / 17.3	16.00±2.00 / 406.4±50.8	6.0±0.50 / 152±13	4100 / 18238			PL062-2
35912	1300950157	.75-.99 / 19.1-25.1	.87 / 22.1	20.00±2.00 / 508.0±50.8	6.0±0.50 / 152±13	4100 / 18238			PL075-2
35913	1300950158	1.00-1.24 / 25.4-31.5	1.12 / 28.4	20.00±2.00 / 508.0±50.8	7.0±1.00 / 178±25	7500 / 33362			PL100-2
35914	1300950159	1.25-1.49 / 31.8-37.8	1.37 / 34.8	22.00±2.50 / 558.8±63.5	7.0±1.00 / 178±25	7500 / 33362			PL125-2
35915	1300950160	1.50-1.99 / 38.1-50.5	1.75 / 44.5	25.00±2.50 / 635.0±63.5	8.0±1.00 / 203±25	7500 / 33362			PL150-2
35916	1300950161	2.00-2.49 / 50.8-63.2	2.25 / 57.2	26.00±2.50 / 660.4±63.5	9.0±1.00 / 229±25	10000 / 44482			PL200-2
35917	1300950162	2.50-2.99 / 63.5-75.9	2.75 / 69.9	28.00±2.50 / 711.2±63.5	10.0±1.00 / 254±25	13000 / 57827			PL250-2
35918	1300950163	3.00-3.49 / 76.2-88.6	3.25 / 82.6	30.00±3.50 / 762.0±88.9	11.0±1.00 / 279±25	16200 / 72061			PL300-2
35919	1300950164	3.50-3.99 / 88.9-101.3	3.75 / 95.3	32.00±3.50 / 812.8±88.9	12.0±1.00 / 305±25	19400 / 86295			PL350-2

*TO DETERMINE RECOMMENDED WORKING LOAD, DIVIDE BREAK STRENGTH BY 5.

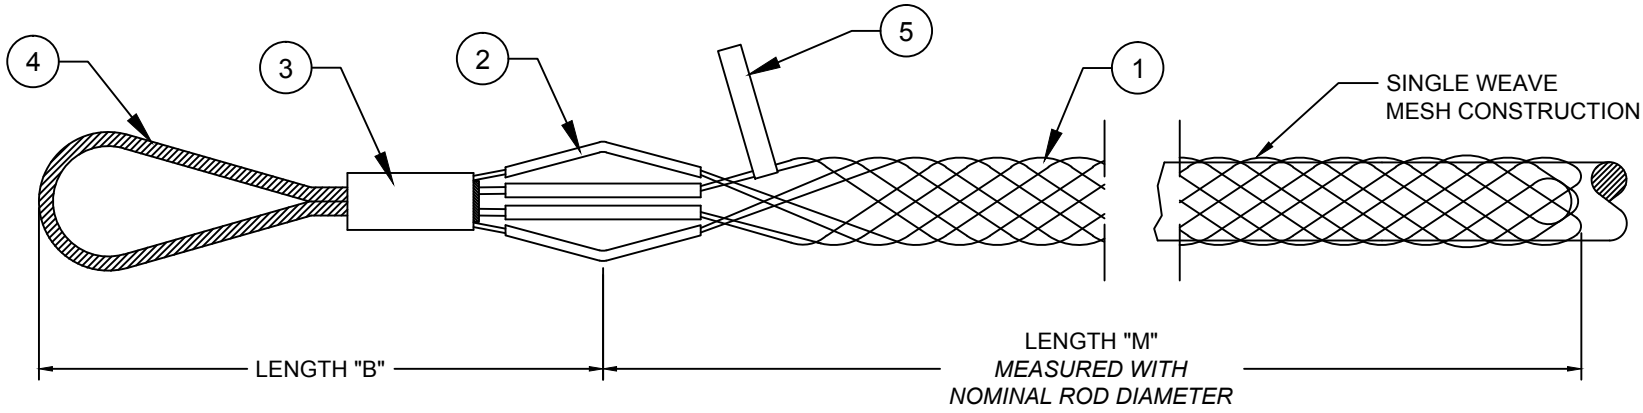

ITEM	DESCRIPTION	MATERIAL
1	WIRE MESH	GALVANIZED STEEL
2	SHOULDER PROTECTOR	ALUMINUM
3	FERRULE	ALUMINUM
4	BALE WIRE	GALVANIZED STEEL
5	LABEL	MYLAR

RELEASE SALES DWG
EC NO: IPG2015-1537 2015/03/04
DRWN: HRUIZ01 2015/03/04
CHKD: HKNEELAN 2015/03/04
APPR: JFMURPHY 2015/06/12
DESCRIPTION

A
REV

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±.13	±.010
1 PLACE	±.25	±.020

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: INCH/MM
SCALE: NTS
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: HRUIZ01 DATE: 2015/03/04
CHECKED BY: HKNEELAN DATE: 2015/03/04
APPROVED BY: JFMURPHY DATE: 2015/06/12

TITLE
PULLING GRIPS
LIGHT DUTY
MEDIUM LENGTH FLEX EYE

MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-130095-115
SHEET NO.: 1 OF 1

SIZE A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION