



Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065

TEL: (805) 522-9998 FAX: (805) 522-9989

E-mail: frontiersales@frontierusa.com

Web: <http://www.frontierusa.com>

3A GENERAL PURPOSE PLASTIC RECTIFIER


GP30-005R-LFR THRU GP30-10R-LFR

FEATURES

- LOW COST
- UL 94V0 FLAME RETARDANT EPOXY MOLDING COMPOUND
- DIFFUSED JUNCTION
- HIGH SURGE CURRENT CAPABILITY
- BEVEL ROUND CHIP, AVALANCHE OPERATION
- ROHS

MECHANICAL DATA

- CASE: TRANSFER MOLDED, DO201AD, DIMENSIONS IN INCHES AND (MILLIMETERS)
- LEADS: SOLDERABLE PER MIL-STD-202, METHOD 208
- POLARITY: CATHODE INDICATED BY COLOR BAND
- WEIGHT: 1.2 GRAMS

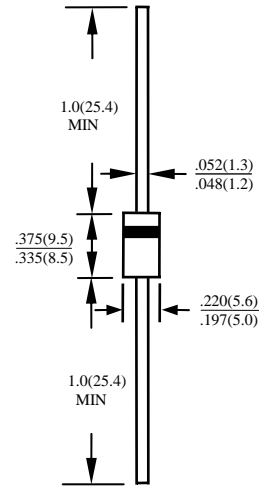

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	GP30 -005R-LF R	GP30 -01R-LF R	GP30 -02R-LF R	GP30 -04R-LF R	GP30 -06R-LF R	GP30 -08R-LF R	GP30 -10R-LF R	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	50	100	200	400	600	800	1000	V
MAXIMUM RMS VOLTAGE	V_{RMS}	35	70	140	280	420	560	700	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	50	100	200	400	600	800	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT 0.375"(9.5mm) LEAD LENGTH AT $T_A=55^\circ\text{C}$	I_O	3.0							A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	200							A
TYPICAL JUNCTION CAPACITANCE (NOTE 1)	C_J	30							PF
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta ja}$	20							$^\circ\text{C/W}$
OPERATING TEMPERATURE RANGE	T_{OP}	-55 TO + 175							$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($A_T T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	GP30 -005R-LF R	GP30 -01R-LF R	GP30 -02R-LF R	GP30 -04R-LF R	GP30 -06R-LF R	GP30 -08R-LF R	GP30 -10R-LF R	UNITS
MAXIMUM FORWARD VOLTAGE AT I_O DC	V_F	1.1							V
MAXIMUM REVERSE CURRENT AT 25°C	I_R	5							μA
MAXIMUM REVERSE CURRENT AT 100°C	I_R	50							μA

- NOTE: 1. MEASURED AT 1MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS
2. BOTH LEADS ATTACHED TO HEAT SINK 63.5×63.5×1t(mm) COPPER PLATE AT LEAD LENGTH 5mm

RATINGS AND CHARACTERISTIC CURVE GP30-005R-LFR THRU GP30-10R-LFR

Fig. 1-MAXIMUM CURRENT RATING
EFFECT OF COPPER AREA.
RESISTIVE/INDUCTIVE LOAD.

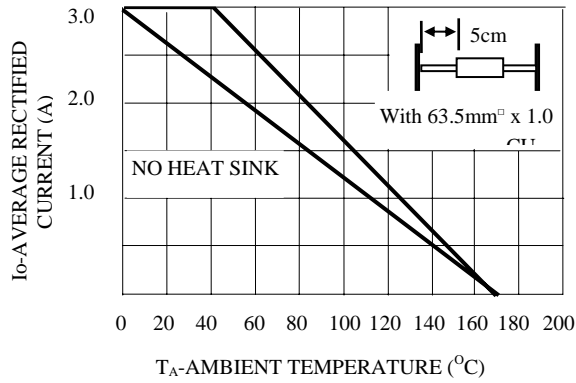


Fig. 2-MAXIMUM FORWARD SURGE
NUMBER OF CYCLES

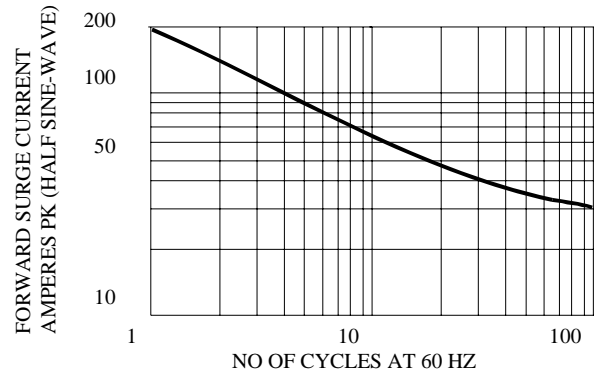


Fig. 3-MAXIMUM CURRENT RATING
EFFECT OF COPPER AREA.
RESISTIVE/INDUCTIVE LOAD.

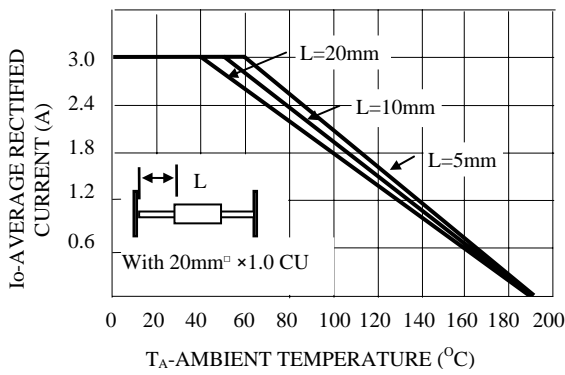


Fig. 4-TYPICAL JUNCTION CAPACITANCE

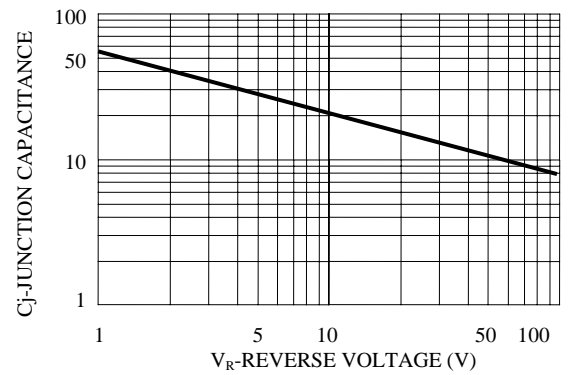


Fig. 5-TYPICAL FORWARD CHARACTERISTICS

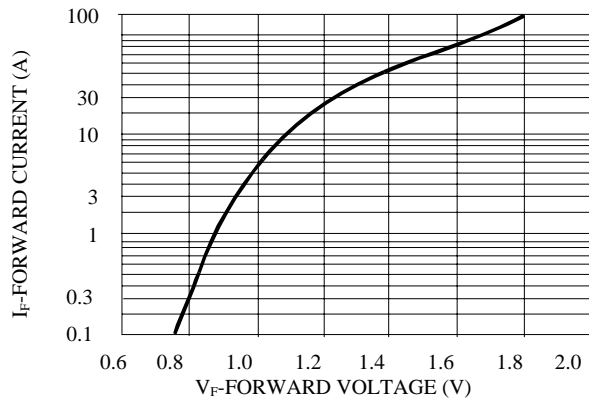


Fig. 6-FORWARD PULSE CURRENT, PULSE

