

Product data sheet

Specifications



Push to test pilot light, Harmony XB4, Explosive atmosphere 24 240 V White

XB4BW21BM5GEX

Product availability : Non-Stock - Not normally stocked in distribution facility

Price* : 352.00 USD

Main

Range of Product	Harmony XB4
Product or Component Type	Push-to-test pilot light
Device short name	XB4
Bezel material	Chromium plated metal

Complementary

Fixing collar material	Zamak
Mounting diameter	0.87 in (22 mm)
Sale per indivisible quantity	1
Height	1.18 in (30 mm)
Width	1.82 in (46.2 mm)
Depth	2.83 in (72 mm)
Net Weight	0.26 lb(US) (0.117 kg)
Device mounting	Fixing hole 0.89 in (22.5 mm) +/- 0.2 mm EN/IEC 60947-1
Fixing center	>= 30 x 40 mm support panel) 0.04...0.24 in (1...6 mm)
Embedding Depth	2.28 in (58 mm)
Marking	Ex db eb mb IIC Gb Ex tb IIIC Db II 2 GD
Shape of signaling unit head	Round
Cap/Operator or lens colour	White
Operator additional information	Booted (clear silicon)
Contacts type and composition	1 NO
Contact operation	Slow-break
Positive opening	Without
Operating travel	0.07 in (1.657 mm) engagement point) 0.18 in (4.622 mm) changing state point) 0.18 in (4.452 mm) total travel)
Operating force	3.962 N
Mechanical durability	5000000 cycles

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Connections - terminals	Screw clamp terminals, 2 x 1.5 mm ² with cable end EN/IEC 60947-1 Screw clamp terminals, 1 x 2.5 mm ² without cable end EN/IEC 60947-1
Tightening torque	7.08...10.62 lbf.in (0.8...1.2 N.m) EN 60947-1
[Ui] rated insulation voltage	415 V
[Ith] conventional free air thermal current	10 A EN/IEC 60947-5-1
[Ie] rated operational current	1.9 A 380 V, AC, A600 EN/IEC 60947-5-1 3 A 240 V, AC, A600 EN/IEC 60947-5-1 6 A 120 V, AC, A600 EN/IEC 60947-5-1 0.27 A 250 V, DC, Q300 EN/IEC 60947-5-1 0.55 A 125 V, DC, Q300 EN/IEC 60947-5-1 2.87 A 24 V, DC, Q300 EN/IEC 60947-5-1
Signalling type	Steady
Light source	Integral LED
[Us] Rated Supply Voltage	24...254 V AC/DC
Current Consumption	2...10 mA
Service life	100000 h

Environment

Protective treatment	TH
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient air temperature for operation	-4...167 °F (-20...75 °C)
Overvoltage category	I IEC 60536
IP degree of protection	IP66 IEC 60529
Standards	EN/IEC 60079-0:2009 EN/IEC 60079-7:2009 EN/IEC 60079-18:2009 EN/IEC 60079-31:2009 UL 60079-0 UL 60079-18 UL 60079-31 ANSI/ISA 12.12.01 CSA C22.2 No 213
Product Certifications	INERIS 04ATEX9004U
Dust zone	Zone 21 - 22
Gas zone	Zone 1 - 2

Ordering and shipping details

Category	22465 - PUSHBUTTONS, 22MM HAZ LOC
Discount Schedule	CS2
GTIN	3606489498054
Nbr. of units in pkg.	1
Package weight(Lbs)	4.44 oz (126 g)
Returnability	No


Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.83 in (7.2 cm)
Package 1 width	1.18 in (3 cm)
Package 1 Length	1.81 in (4.6 cm)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Dimensions

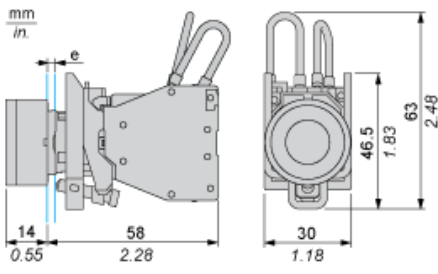

e : support thickness: 1 to 6 mm / 0.04 to 0.24 in.

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals

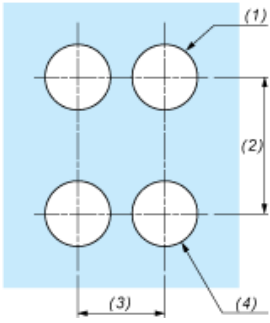

- (1) Diameter on finished panel or support
- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) $\text{Ø } 22.5 \text{ mm} / 0.89 \text{ in. recommended } (\text{Ø } 22.3 \text{ mm}_0^{+0.4} / 0.88 \text{ in.}_0^{+0.016})$