

January 9, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:<http://www.semtech.com>

HIGH DENSITY, HIGH VOLTAGE, FAST RECOVERY RECTIFIER ASSEMBLY

QUICK REFERENCE DATA


- Low reverse recovery time
- Low reverse leakage current
- Corona free design
- Easy aluminum base mount
- Low forward voltage drop

- $V_R = 2.5\text{kV} \text{ \& } 5\text{kV}$
- $I_F = 2.5\text{A}$
- $t_{rr} = 150\text{nS}$
- $I_R = 1.0\mu\text{A}$

ABSOLUTE MAXIMUM RATINGS

	Symbol	SDHF2.5KS	SDHF5KS	Unit
Working reverse voltage	V_{RWM}	2.5	5.0	kV
Surge reverse voltage	V_{RSM}	2.5	5.0	kV
Average forward current in air @ 25°C in oil @ 55°C	$I_{F(AV)}$	← 2.5 → ← 2.5 →		A A
Non-repetitive surge current $t_p = 8.3\text{mS}$, @ 25°C	I_{FSM}	← 150 →		A
Storage temperature range	T_{STG}	← -55 to +150 →		°C
Operating temperature range	T_{OP}	← -55 to +150 →		°C
Body length ±0.030"	dim C	3.36	4.04	inches

MECHANICAL

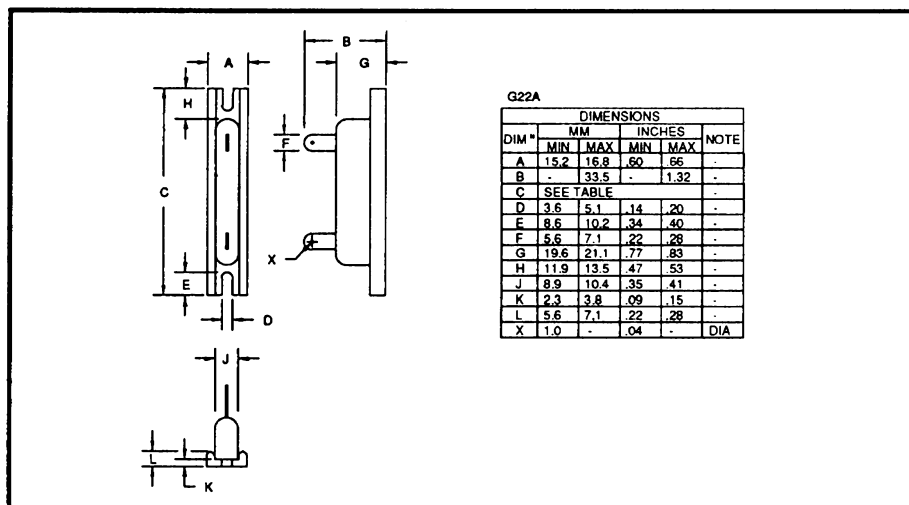


January 9, 1998

ELECTRICAL CHARACTERISTICS

	Symbol	SDHF2.5KS	SDHF5KS	Unit
Max. forward voltage drop @ $I_F = 3.0A$, $T_j = 25^\circ C$	V_F	6.6	13.2	V
Max. reverse leakage current @ V_{RWM} , $T_j = 25^\circ C$	I_R	← 1.0 →		μA
@ V_{RWM} , $T_j = 100^\circ C$	I_R	← 25 →		μA
Max. reverse recovery time ¹ 0.5A I_F to 1.0A I_R . Recovers to 0.25A I_{RR} .	t_{rr}	← 150 →		nS
Max. fusing current $t_p = 8.3mS$	I^2t	← 93 →		A^2S

¹ Measured on discrete devices prior to assembly

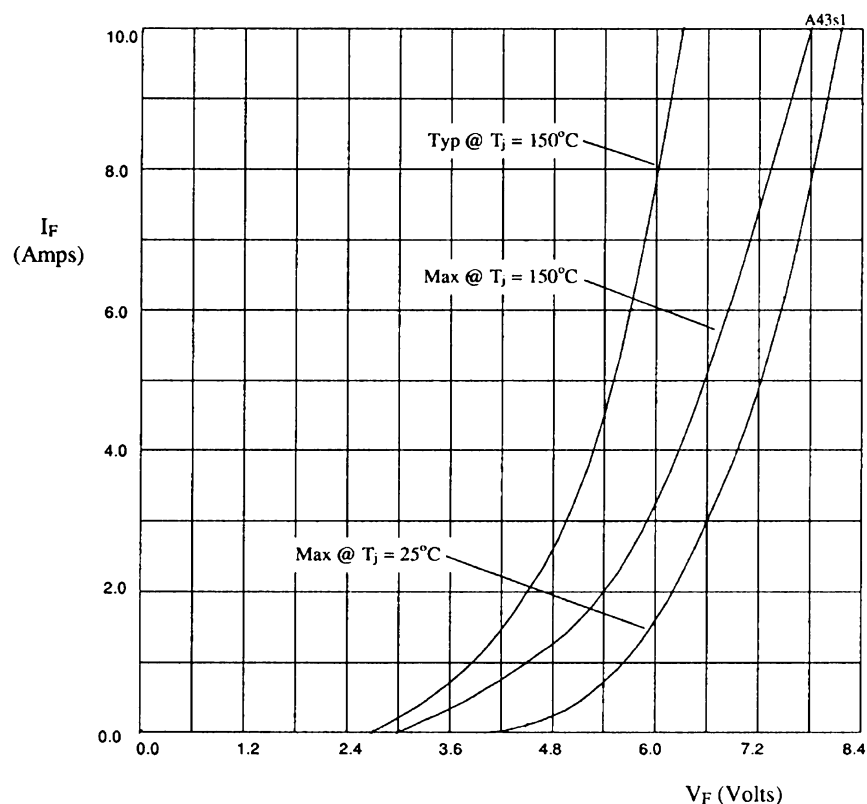

Multiplication tables for fig 1.

SDHF2.5KS X-axis x1
SDHF5KS X-axis x2

Fig 1. Forward voltage drop as a function of forward current for use with multiplication table 1.