

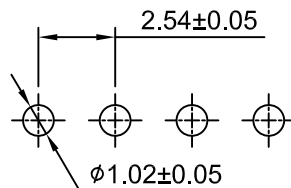


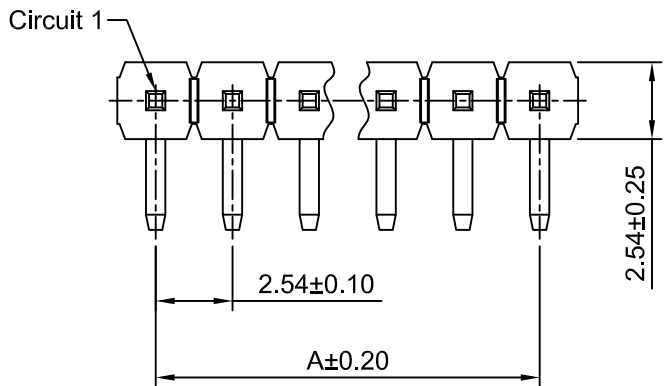



**Ordering Information:**

A2541WR-XP - \*\*\* - \*\*\* - \*  
 1 2 3 4

- 1.Part No.
- 2.Size(H):  
 (blank): 2.54mm  
 H15: 1.50mm  
 H17: 1.70mm  
 H20: 2.00mm  
 H30: 3.00mm
- 3.Material:  
 (blank): PBT,UL94V-0  
 6T: Nylon 6T,UL94V-0  
 GWT: Nylon 6T,UL94V-0,GWT 750°C
- 4.Finish:  
 (blank): Gold over Nickel  
 T: Tin over Nickel

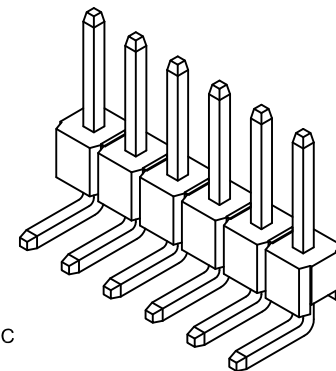

P.C.B LAYOUT

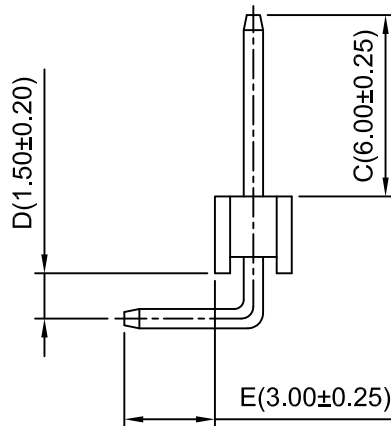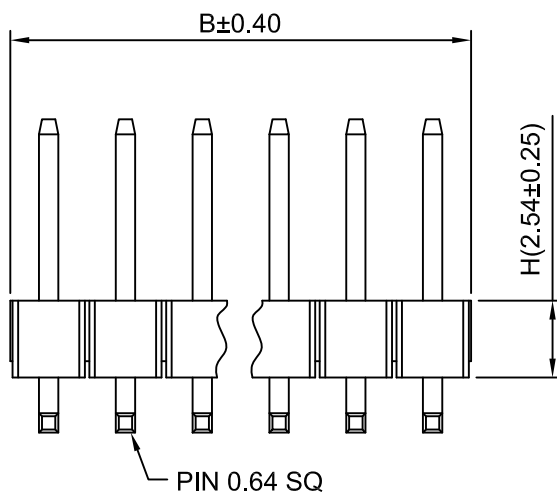

**SPECIFICATIONS:**

Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -40°C ~ +105°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Pin Material: Brass/Gold over Nickel  
 Material: PBT ,UL94V-0(Black)

**Ordering Information & Dimensions**

Circuits	Dim(mm)		Circuits	Dim(mm)		Circuits	Dim(mm)	
	A	B		A	B		A	B
2P	2.54	5.08	15P	35.56	38.10	28P	68.58	71.12
3P	5.08	7.62	16P	38.10	40.64	29P	71.12	73.66
4P	7.62	10.16	17P	40.64	43.18	30P	73.66	76.20
5P	10.16	12.70	18P	43.18	45.72	31P	76.20	78.74
6P	12.70	15.24	19P	45.72	48.26	32P	78.74	81.28
7P	15.24	17.78	20P	48.26	50.80	33P	81.28	83.82
8P	17.78	20.32	21P	50.80	53.34	34P	83.82	86.36
9P	20.32	22.86	22P	53.34	55.88	35P	86.36	88.90
10P	22.86	25.40	23P	55.88	58.42	36P	88.90	91.44
11P	25.40	27.94	24P	58.42	60.96	37P	91.44	93.98
12P	27.94	30.48	25P	60.96	63.50	38P	93.98	96.52
13P	30.48	33.02	26P	63.50	66.04	39P	96.52	99.06
14P	33.02	35.56	27P	66.04	68.58	40P	99.06	101.60

深圳市金航标电子有限公司      WWW.BDS666.COM  
 KH-A2541WR-4P      0755-83044319

Unit mm	Scale 4:1	Sheet 1 of 1	Title : <b>2.54mm Pitch</b>	
Draw By: Diankui Wan				
General Tolerance			90° Single Row Pin Header	
x.xx±0.25 x.xxx±0.15				
PROJECT			DRAW NO : A2541WR-XP	
REV DESCRIPTION DATE			REV A2	

A2	CHANGE THE TOLERANCE	2019.09.06
A1	updated version	2018.03.30
A0	NEW RELEASE	2005.07.01
REV	DESCRIPTION	DATE