




SPECIFICATION FOR APPROVAL

REF : 20070123-A


PAGE: 1

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	CB3011□□□□L□-□□□
		ABC'S ITEM NO.	

I . CONFIGURATION & DIMENSIONS :




A :	3.60±0.15	m / m
B :	3.90 max.	m / m
C :	1.10±0.10	m / m
D :	1.10±0.30	m / m
E :	0.80±0.20	m / m
F :	1.60 ref.	m / m
G :	4.00 ref.	m / m
H :	1.00 ref.	m / m



(PCB Pattern Suggestion)

II . SCHEMATIC DIAGRAM :




III . MATERIALS :


- a . Core : Ferrite core
- b . Wire : Enamelled copper wire
- c . Base : Cu/Ag(1.0um)
- d . Adhesive : Epoxy resin
- e . Remark : Products comply with RoHS' requirements

IV . GENERAL SPECIFICATION :

- a . Temp. rise : 40°C typ.
- b . Storage temp. : -40°C ----+120°C
- c . Operating temp. : -40°C ----+125°C
(included Temp. rise)
- d . Resistance to solder heat : 260°C .10 secs.



Peak Temp : 260°C max.
Max time above 230°C : 50sec max.
Max time above 200°C : 70sec max.

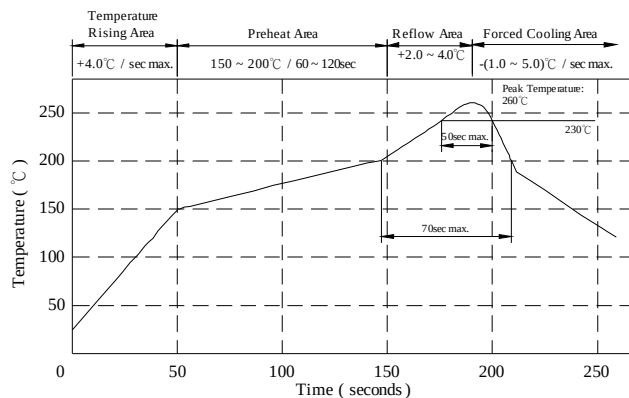

AR-001A



千如電子集團
ABC ELECTRONICS GROUP.

SPECIFICATION FOR APPROVAL

REF : 20070123-A

PAGE: 2

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	CB3011□□□□L□-□□□
		ABC'S ITEM NO.	

V . ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μ H) 0.1V/100KHz	RDC (Ω) max.	Irms. (A) typ.	Isat. (A) max.
CB30111R0ML□-□□□	1.0 $\pm$ 20%	0.11	1.50	2.30
CB30111R8ML□-□□□	1.8 $\pm$ 20%	0.14	1.30	1.70
CB30112R5ML□-□□□	2.5 $\pm$ 20%	0.18	1.10	1.40
CB30113R3ML□-□□□	3.3 $\pm$ 20%	0.26	0.85	0.90
CB30114R7ML□-□□□	4.7 $\pm$ 20%	0.32	0.72	0.88
CB30116R8ML□-□□□	6.8 $\pm$ 20%	0.48	0.67	0.77
CB3011100ML□-□□□	10.0 $\pm$ 20%	0.70	0.52	0.59
CB3011150ML□-□□□	15.0 $\pm$ 20%	0.96	0.42	0.45
CB3011220ML□-□□□	22.0 $\pm$ 20%	1.50	0.34	0.39

1). Packing information : ☐A: Bulk ☐B: Taping Reel

2). "- □□□ " : Reference code

3). Irms. base on temp. rise 40°C typ.

4). Isat. base on Δ L/LOA=10% max.

SPECIFICATION FOR APPROVAL


REF : 20070123-A

PAGE: 3


PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	CB3011□□□□L□-□□□
		ABC'S ITEM NO.	

VI . PACKAGING INFORMATION

(1) Configuration

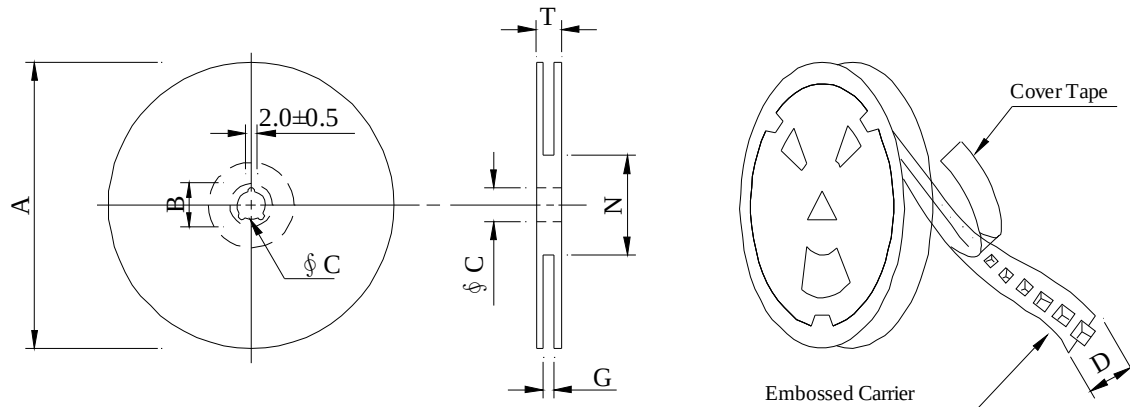

※ Carrier tape width : D

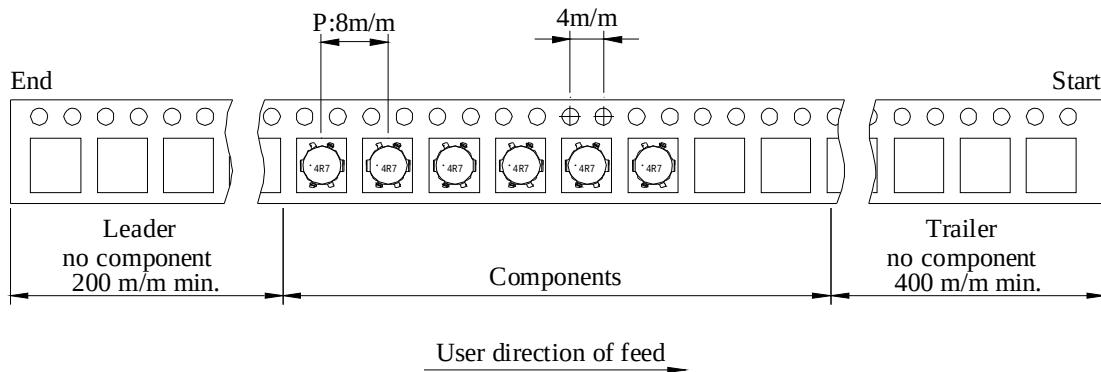

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
07 - 12	178	21±0.8	13	12	14 ⁺⁰	50 ⁻⁰	18.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
CB3011	1,500	180	07 - 12	60,000	7.2	42 x 41 x 24

AR-001A



千如電子集團
ABC ELECTRONICS GROUP.


SPECIFICATION FOR APPROVAL

REF : 20070123-A

PAGE: 4

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	CB3011□□□□L□-□□□
		ABC'S ITEM NO.	

VII . DWGING NUMBER EXPRESSION :

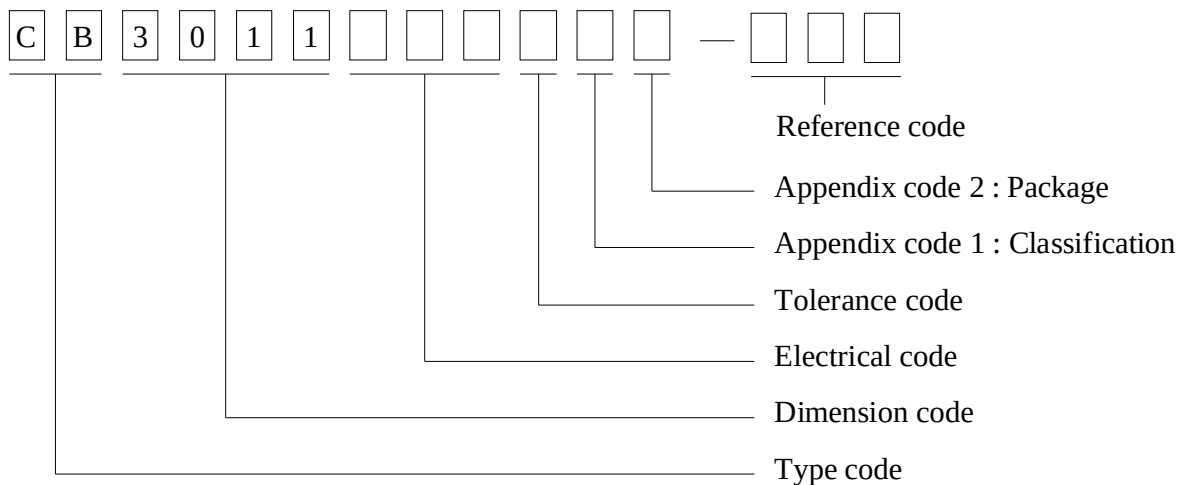

Appendix code 1 : Product Classification

L : Lead Free Standard products comply with RoHS' requirements

1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T /R (Reel package)	1500 pcs	

SPECIFICATION FOR APPROVAL

REF : 20070123-A

PAGE: 5

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	CB3011□□□□L□-□□□
		ABC'S ITEM NO.	

VIII . RELIABILITY TEST :

Test item	Specification	Test condition
Solderability	More than 95% of the terminal electrode Shall be covered With fresh solder.	Preheat : 155℃ / 4 hours. Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5℃ Flux : Rosin Dip time : 5±0.5 seconds
Thermal shock test (Temp. cycle)	Electrical oharacteristics shall not change more than ±20%	Room temp. → -40 ℃ 15 minutes 30 minutes Room temp. → +125 ℃ 15 minutes 30 minutes Total : 50 cycles
Humidity Test		Temperature : 40±2℃ Humidity : 90±5% Time : 1000 hours
High temp. Resistance test		Temperature : 125±5℃ Applied current : Per spec. Time : 96 hours

AR-001A

SPECIFICATION FOR APPROVAL

REF : 20070123-A

PAGE: 6

PROD.	SMD POWER INDUCTOR	ABC'S DWG NO.	CB3011□□□□L□-□□□
NAME		ABC'S ITEM NO.	

IX . UL CARD :

OBMW2		September 8, 2000	
Magnet Wire-Component			
JUNG SHING WIRE CO LTD		E174837	
231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN			
HSIEN TAIWAN			

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	—	Polyamideimide	—	—	MW81-C	220
CFUEWB	—	Polyurethane	—	—	MW75C	130
EIAIW	—	Polyesterimide	Polyamideimide	—	MW35C	200
EILOCKY	—	Polyesterimide	Polyamide	—	—	180
EILOCKW	—	Polyesterimide	Modified Epoxy	—	—	200
EIW	—	Polyesterimide	—	—	—	220
EIW-2	—	Polyesterimide	—	—	MW74-C	200
FL.EILOCKY	—	Modified Polyester	Polyamide	—	—	155
LSFFW	—	Polyurethane	—	—	MW79-C	155
LSUEW	—	Polyurethane	—	—	—	130
PEW	—	Polyester	—	—	—	155
PEY	—	Polyester	Nylon	—	MW24-C	155
SF.FLW	—	Modified Polyester	—	—	MW26C	155
SF.EIW	—	Polyesterimide	—	—	MW77C	180
SF.BY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.FLY@	—	Modified Polyester	Nylon	—	MW27-C	155
SF.BLOCKBS	—	Modified Polyester	Modified Polyamide	—	—	155
SF.EILOCKY#	—	Polyesterimide	Polyamide	—	—	180
SF.EILOCKBS	—	Polyesterimide	Modified Polyamide	—	—	180
SF.BW@	—	Modified Polyester	—	—	MW26C	155
SFFW	—	Polyurethane	—	—	MW79	155

287806002
Page 1 of 2
A not-for-profit organization
dedicated to public safety and
committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	—	Polyurethane	—	Polyamide	MW80C	155
UEW-1	—	Polyurethane	—	—	MW2-C	105
UEW-2	—	Polyurethane	—	—	—	130
UEW-4	—	Polyurethane	—	—	MW75C	130
UEY	—	Polyurethane	—	Nylon	MW28-C	130
UEY-2	—	Polyurethane	—	Polyamide	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZL.
LZ - Signifies magnet wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks  or 榮星電線, material designation or marked designation on packed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002
Page 2 of 2
OBMW2/E174837
September 8, 2000

AR-001A

