

Surface Mount Multilayer Ceramic Chip Capacitors for Commercial Applications



FEATURES

- C0G is an ultra-stable dielectric offering a Temperature Coefficient of Capacitance (TCC) of 0 ± 30 ppm/°C
- Low Dissipation Factor (DF)
- Ideal for critical timing and tuning applications
- Ideal for snubber and surge suppression applications
- Protective surface coating of high voltage capacitors maybe required to prevent surface arcing.
- Surface mount, precious metal technology, wet build process



ELECTRICAL SPECIFICATIONS

Note: Electrical characteristics at + 25 °C unless otherwise specified

Operating Temperature: - 55 °C to + 125 °C

Capacitance Range: 1.0 pF to 0.056 µF

Voltage Rating: 10 Vdc to 1000 Vdc

Temperature Coefficient of Capacitance (TCC):

0 ± 30 ppm/°C from - 55 °C to + 125 °C

Dissipation Factor (DF):

0.1 % maximum at 1.0 V_{rms} and 1 kHz for values > 1000 pF

0.1 % maximum at 1.0 V_{rms} and 1 MHz for values ≤ 1000 pF

Aging Rate: 0 % maximum per decade

Insulation Resistance (IR):

At + 25 °C and rated voltage 100 000 MΩ minimum or 1000 ΩF, whichever is less

At + 125 °C and rated voltage 10 000 MΩ minimum or 100 ΩF, whichever is less

Dielectric Withstanding Voltage (DWV):

This is the maximum voltage the capacitors are tested for a 1 to 5 second period and the charge/discharge current does not exceed 50 mA

≤ 200 Vdc : DWV at 250 % of rated voltage

500 Vdc: DWV at 200 % of rated voltage

630/1000 Vdc: DWV at 150 % of rated voltage

ORDERING INFORMATION

VJ0805	A	102	K	X	A	A	T	### (2)
CASE CODE	DIELECTRIC	CAPACITANCE NOMINAL CODE	CAPACITANCE TOLERANCE	TERMINATION	DC VOLTAGE RATING ⁽¹⁾	MARKING	PACKAGING	PROCESS CODE
0402 0603 0805 1206 1210 1808 1812 1825 2220 2225	A = C0G (NP0)	Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. An "R" indicates a decimal point. Examples: 102 = 1000 pF 1R8 = 1.8 pF	B = ± 0.10 pF C = ± 0.25 pF D = ± 0.5 pF F = ± 1 % G = ± 2 % J = ± 5 % K = ± 10 % Note: B, C, D < 10 pF F, G, J, K ≥ 10 pF	X = Ni barrier 100 % tin plated F = AgPd	X = 25 V A = 50 V B = 100 V C = 200 V E = 500 V L = 630 V G = 1000 V	A = Unmarked M = Marked Note: Marking is only available for 0805 and 1206		
T = 7" reel/plastic tape C = 7" reel/paper tape R = 11 1/4" reel/plastic tape P = 11 1/4" reel/paper tape O = 7" reel/flamed paper tape I = 11 1/4"/13" reel/flamed paper tape Note: "I" and "O" is used for "F" termination paper taped								

Notes:

(1) DC voltage rating should not be exceeded in application

(2) Process Code may be added with up to three digits, used to control non-standard products and/or special requirements


(3) Case size designator may be replaced by a four digit drawing number used to control non-standard products and/or requirements



VJ C0G (NP0) Dielectric

Surface Mount Multilayer Ceramic Chip Capacitors Vishay Vitramon
for Commercial Applications

DIMENSIONS in inches [millimeters]

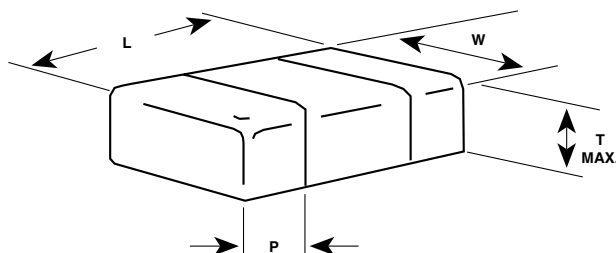

EIA STYLE	PART ORDERING NUMBER	LENGTH (L)	WIDTH (W)	MAXIMUM THICKNESS (T)	TERMINATION (P)	
					MINIMUM	MAXIMUM
0402	VJ0402	$0.040 \pm 0.004/-0.002$ [1.00 ± 0.10/- 0.05]	$0.020 \pm 0.004/-0.002$ [0.50 ± 0.10/- 0.05]	0.024 [0.60]	0.004 [0.10]	0.016 [0.41]
0603	VJ0603	0.063 ± 0.005 [1.60 ± 0.12]	0.031 ± 0.005 [0.80 ± 0.12]	0.036 [0.92]	0.012 [0.30]	0.018 [0.46]
0805	VJ0805	0.079 ± 0.008 [2.00 ± 0.20]	0.049 ± 0.008 [1.25 ± 0.20]	0.057 [1.45]	0.010 [0.25]	0.028 [0.71]
1206	VJ1206	0.126 ± 0.008 [3.20 ± 0.20]	0.063 ± 0.008 [1.60 ± 0.20]	0.067 [1.70]	0.010 [0.25]	0.028 [0.71]
1210	VJ1210	0.126 ± 0.008 [3.20 ± 0.20]	0.098 ± 0.008 [2.50 ± 0.20]	0.067 [1.70]	0.010 [0.25]	0.028 [0.71]
-	VJ1808	0.177 ± 0.010 [4.50 ± 0.25]	0.080 ± 0.010 [2.03 ± 0.25]	0.067 [1.70]	0.010 [0.25]	0.030 [0.76]
1812	VJ1812	0.177 ± 0.010 [4.50 ± 0.25]	0.126 ± 0.008 [3.20 ± 0.20]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]
1825	VJ1825	0.177 ± 0.010 [4.50 ± 0.25]	0.252 ± 0.010 [6.40 ± 0.25]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]
-	VJ2220	0.220 ± 0.008 [5.59 ± 0.20]	0.200 ± 0.010 [5.08 ± 0.25]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]
-	VJ2225	0.220 ± 0.010 [5.59 ± 0.25]	0.250 ± 0.010 [6.35 ± 0.25]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]

VJ C0G (NP0) Dielectric

Vishay Vitramon Surface Mount Multilayer Ceramic Chip Capacitors
for Commercial Applications



SELECTION CHART																						
STYLE		VJ0402			VJ0603			VJ0805				VJ1206					VJ1210 ⁽¹⁾					
EIA TYPE		0402			0603			0805				1206					1210					
VOLTAGE (Vdc)		25	50	100	50	100	200	50	100	200	500	50	100	200	500	630	50	100	200	500	630	
CAP. CODE	CAP.																					
1R0	1.0 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•						
1R2	1.2 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•						
1R5	1.5 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•						
1R8	1.8 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•						
2R2	2.2 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•						
2R7	2.7 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•						
3R3	3.3 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•						
3R9	3.9 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•						
4R7	4.7 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•						
5R6	5.6 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•						
6R8	6.8 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•						
8R2	8.2 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•						
100	10 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•			
120	12 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•			
150	15 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•			
180	18 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•			
220	22 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•			
270	27 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•			
330	33 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•			
390	39 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•			
470	47 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•			
560	56 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•	•	•	
680	68 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•	•	•	
820	82 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•	•	•	
101	100 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•	•	•	
121	120 pF	••	••	••	••	••	••	••	••	••	•	•	•	•	•	•			•	•	•	
151	150 pF	••	••		••	••	••	••	••	••	•	•	•	•	•	•			•	•	•	
181	180 pF	••	••		••	••	••	••	••	••	•	•	•	•	•	•			•	•	•	
221	220 pF	••	••		••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	
271	270 pF				••	••	••	••	••	••	•	•	•	•	•	•	•	•	•	•	•	
331	330 pF				••	••		••	••	••	•	•	•	•	•	•	•	•	•	•	•	
391	390 pF				••	••		••	••	••	•	•	•	•	•	•	•	•	•	•	•	
471	470 pF				••			••	••	•		•	•	•	•	•	•	•	•	•	•	
561	560 pF				••			••	••	•		•	•	•	•	•	•	•	•	•	•	
681	680 pF				••			••	••	•		•	•	•	•	•	•	•	•	•	•	
821	820 pF							••	••	•		•	•	•	•	•	•	•	•	•	•	
102	1000 pF							••	••			•	•	•	•	•	•	•	•	•	•	
122	1200 pF							•	•			•	•	•			•	•	•	•	•	
152	1500 pF							•	•			•	•	•			•	•	•	•	•	
182	1800 pF							•				•	•	•			•	•	•	•	•	
222	2200 pF							•				•	•	•			•	•	•			
272	2700 pF							•				•	•	•			•	•	•			
332	3300 pF							•				•	•	•			•	•	•			
392	3900 pF							•				•	•				•	•	•			
472	4700 pF											•	•				•	•	•			
562	5600 pF											•					•	•	•			
682	6800 pF											•					•	•				
822	8200 pF											•					•					
103	0.010 μF											•					•					
123	0.012 μF																•					
153	0.015 μF																					
183	0.018 μF																					
223	0.022 μF																					
273	0.027 μF																					
333	0.033 μF																					
393	0.039 μF																					
473	0.047 μF																					
563	0.056 μF																					

Note:

⁽¹⁾ See soldering recommendations within this data book, or visit www.vishay.com/doc?45034

•• Paper tape • Plastic tape









SELECTION CHART

Note:

(1) See soldering recommendations within this data book, or visit www.vishay.com/doc?45034

- Plastic tape

C0G (NP0) DIELECTRIC - TYPICAL PARAMETERS

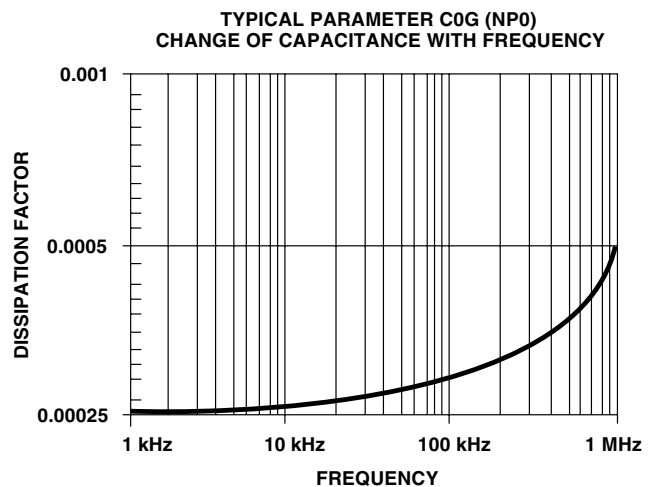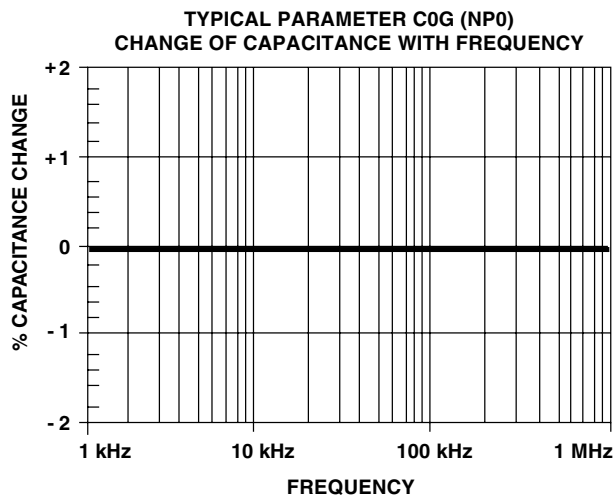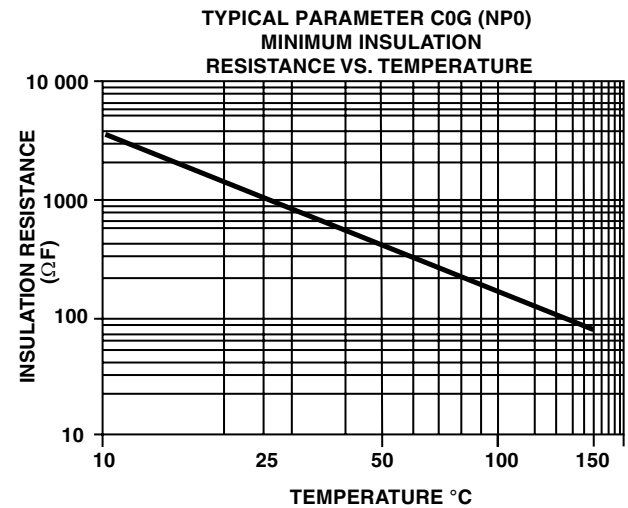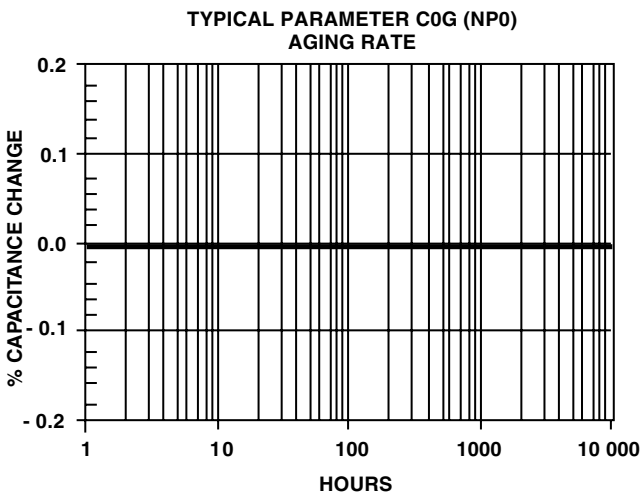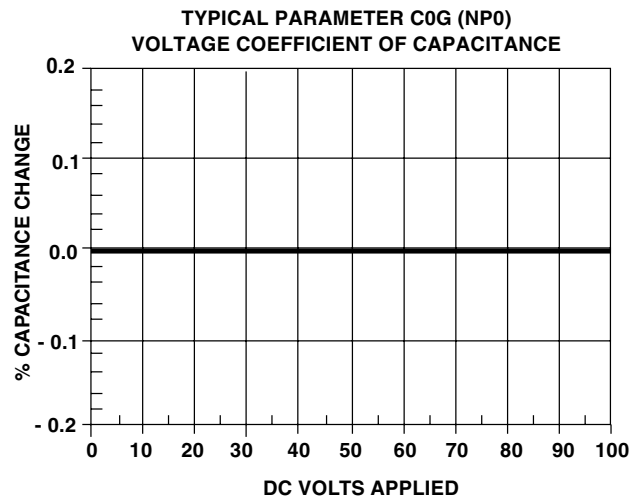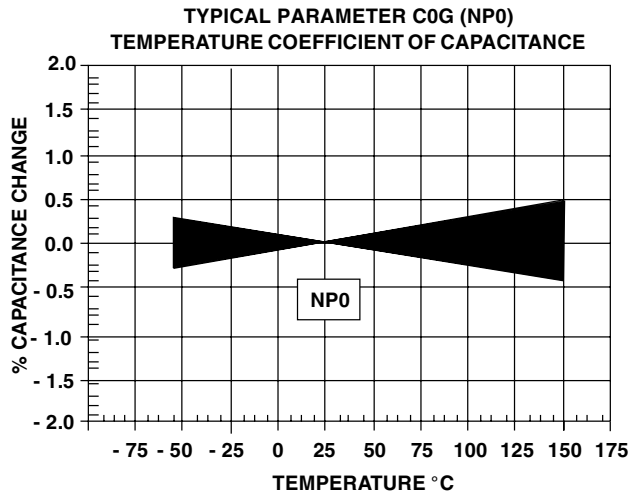



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.