

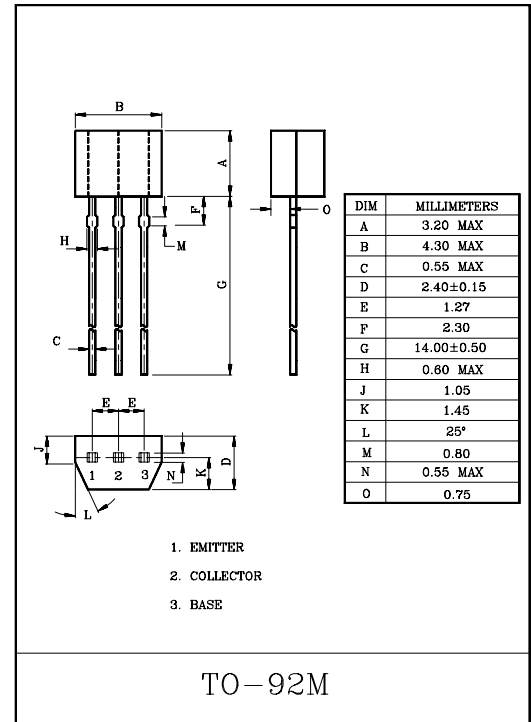
LOW NOISE AUDIO AMPLIFIER APPLICATION.

FEATURES

- High DC Current Gain : $h_{FE}=70\sim 700$.
- Excellent h_{FE} Linearity
: $h_{FE}(0.1mA)/h_{FE}(2mA)=0.95(\text{Typ.})$.
- Low Noise : $NF=0.2dB(\text{Typ.})$, $3dB(\text{Max.})$.
- Complementary to KTA1267L.

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	50	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	150	mA
Emitter Current	I_E	-150	mA
Collector Power Dissipation	P_C	400	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	$-55\sim 150$	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=50V, I_E=0$	-	-	0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5V, I_C=0$	-	-	0.1	μA
DC Current Gain	$h_{FE}(\text{Note})$	$V_{CE}=6V, I_C=2mA$	70	-	700	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100mA, I_B=10mA$	-	0.1	0.25	V
Transition Frequency	f_T	$V_{CE}=10V, I_C=1mA$	80	-	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$	-	2.0	3.5	pF
Noise Figure	NF(1)	$V_{CE}=6V, I_C=0.1mA, f=100Hz, R_g=10k\Omega$	-	0.5	6.0	dB
	NF(2)	$V_{CE}=6V, I_C=0.1mA, f=1kHz, R_g=10k\Omega$	-	0.2	3.0	

Note : h_{FE} Classification O:70~140, Y:120~240, GR:200~400 , BL:300~700