REV.	ECN. NO.	NAME	DATE



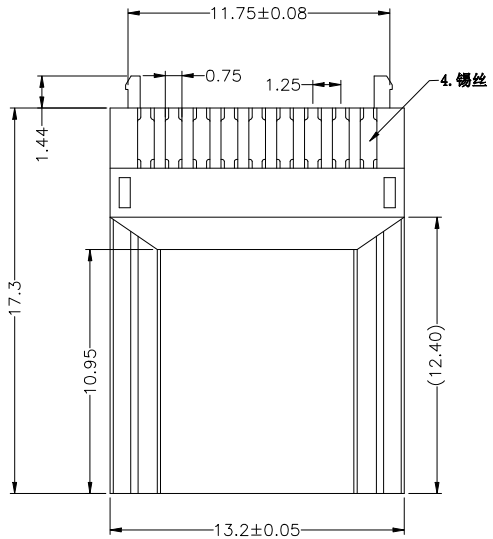

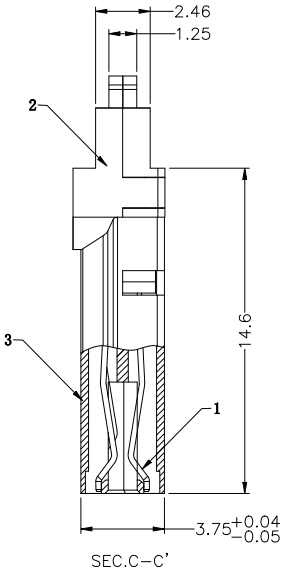

NOTE:
1.MATERIAL:
HOUSING: LCP
COLOR: BLACK.
CONTACT: C5210, THICKNESS =0.25MM
2.FINISH:
SEE TABLE
3.Low level contact resistance: 10mOHM MAX
4.Insulation resistance:
Unmated connectors :Apply 500 Volts DC,100 MOHM Min.
Mated connectors :apply 150 Volts DC, 10 MOHM Min.
5.Dielectric withstanding valtage:
Unmated Connectors :500 V AC
Mated connectors :300V AC
6.Mating and Unmating force:
Mating force :44.1 N Max.
Unmating force : 9.8~39.2N

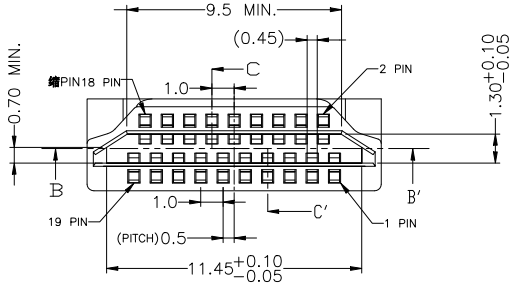

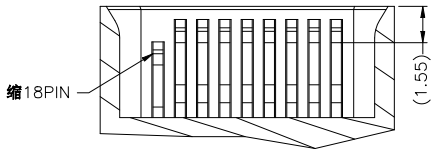

PART NO: HAM10AXLB02

1-gold plated 1u"
2-gold plated 3u"
3-gold plated 6u"
4-gold plated 15u"
5-gold plated 20u"
6-gold plated 30u"
7-gold plated 50u"
0-gold plated 10u"

RoHS Compliant

TOLERANCE UNSPECIFIED . .0 ±0.38 .00 ±0.25 .000 ±0.10 ANGLE ±3.00° MANUFACTURING COPY		VITALCONN a vital connector company		FOR YOUR VITAL CONNECTION	
		TITLE: HDMI PLUG (With tin line)			
DRAWN BY:	BECKER	PART NO:	HAM10AXLB02		REV: A
CHECKED BY:	VTA	SIZE: A4	UNIT: mm	SHEET: 1OF1	FCN: B1
APPROVED BY:	QPF	PROJECTION		http://www.vitalconn.com	

Download from alldatasheet.com