

Han TC650 Buchsenkontakt 240mm²

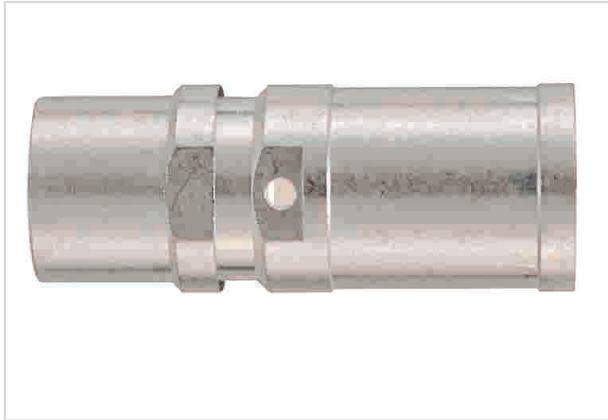


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 11 000 6268 |
| Specification | Han TC650 Buchsenkontakt 240mm ² |
| HARTING eCatalogue | https://b2b.harting.com/09110006268 |

Identification

| | |
|-----------------|---------------|
| Category | Contacts |
| Series | TC 650 |
| Type of contact | Crimp contact |

Version

| | |
|-----------------------|-----------------|
| Gender | Female |
| Manufacturing process | Turned contacts |

Technical characteristics

| | |
|-------------------------|---------------------|
| Conductor cross-section | 240 mm ² |
| Operating current | ≤650 A |
| Contact resistance | ≤0.3 mΩ |
| Stripping length | 46 mm |
| Limiting temperature | -40 ... +125 °C |
| Mating cycles | ≥500 |

Material properties

| | |
|-----------------------------|---------------|
| Material (contacts) | Copper alloy |
| Surface (contacts) | Silver plated |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | No |



Pushing Performance

Material properties

| | |
|----------------------------|----|
| REACH ANNEX XIV substances | No |
| REACH SVHC substances | No |

Specifications and approvals

| | |
|----------------|-------------------------|
| Specifications | EN 60664-1 IEC 61984 |
|----------------|-------------------------|

Commercial data

| | |
|--------------------------------|--|
| Packaging size | 1 |
| Net weight | 222.82 g |
| Country of origin | Romania |
| European customs tariff number | 85359000 |
| eCl@ss | 27440204 Contact for industrial connectors |