

Han PushPull Power T

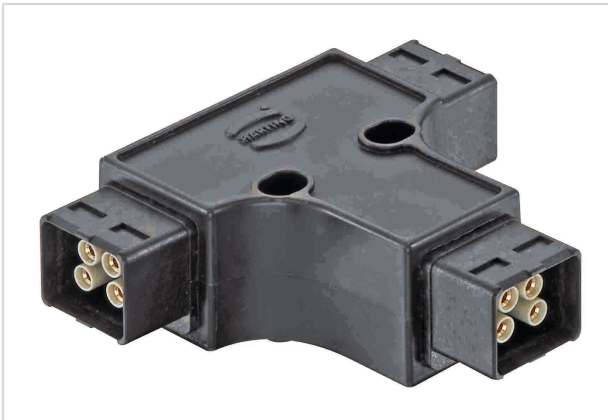


Image is for illustration purposes only. Please refer to product description.

Part number	09 12 008 4770
Specification	Han PushPull Power T
HARTING eCatalogue	https://b2b.harting.com/09120084770

Identification

Category	Energy distributors
Series of hoods/housings	Han-Power® T
Element	Energy distributor
Specification	With 3x HARTING PushPull Power Bulkhead mounted housing

Version

Number of contacts	4
--------------------	---

Technical characteristics

Rated current	12 A
Rated voltage	48 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	>10 ⁸ Ω
Limiting temperature	-40 ... +70 °C
Mating cycles	≥750
Degree of protection acc. to IEC 60529	IP65 IP67

Material properties

Material (hood/housing)	Polyamide (PA)
Colour (hood/housing)	RAL 9005 (jet black)
Material flammability class acc. to UL 94	V-0



Pushing Performance

Material properties

RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead
ECHA SCIP number	564b7d75-7bf6-4cfb-acb1-2168eb61b675
California Proposition 65 substances	Yes
California Proposition 65 substances	Nickel Lead

Specifications and approvals

Specifications	EN 60664-1 IEC 61984
CE	Yes

Commercial data

Packaging size	1
Net weight	28.5 g
Country of origin	Germany
European customs tariff number	85444290
eCl@ss	27142409 Small distribution board