

TRUSTED BATTERY SOLUTION

KEEPING YOU IN CHARGE







PSC-6500A-C 6V 0.5A

alad Load Asid Dattom: Charges

Sealed Lead Acid Battery Charger A-C Battery Charger Series

FEATURES

- Universal input voltage range 10VAC 240VAC
- Automatic, current sensing dual-rate charging for efficient, care-free and safe operation
- LED indicators
- Alligator clip connectors with insulated sleeves


APPROVALS

- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- DOE
- ISO9001:2015 Quality management systems
- FCC

ETL

CE

CHARGER CHARACTERISTICS

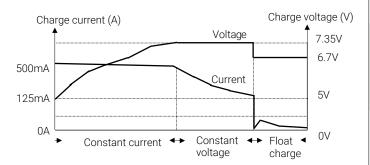

GLOBAL HEADQUARTERS

(USA AND INTERNATIONAL EXCLUDING EMEA)

Power-Sonic Corporation 365 Cabela Dr Suite 300, Reno, Nevada 89523 USA

T: +1 619 661 2020

E: customer-service@power-sonic.com

POWER-SONIC EMEA

(EMEA - EUROPE, MIDDLE EAST AND AFRICA)

Smitspol 4, 3861 RS Nijkerk, The Netherlands

T NL: + 31 33 7410 700 T UK: + 44 1268 560 686 T FR: + 33 344 32 18 17

E: salesEMEA@power-sonic.com

PERFORMANCE SPECIFICATIONS

Input Specs

AC input voltage rating 100Vac-240Vac AC input frequency 47Hz-63Hz

AC input current 0.1@115Vac/0.07a@230Vac

AC input power 6.8W
AC static state current 20mA

Output Specs

Output voltage range 5.0-7.5Vdc 0.5A@6Vdc Output current Output power 3.8W 0.5A Bulk charge current rating Bulk charge voltage rating 7.35Vdc 6.7Vdc Float charge voltage rating 125mA Light switching current Charging capacity range 2Ah to 5Ah

General Specs

0.6 Efficiency Over load protection <0.75A Short circuit protection Yes Reversed polarity connectors protection 0°C-40°C Operating temperature -30°C-85°C Storage temperature Net weight 100g **Dimensions** 80*50*57mm Enclosure Plastic Case Application Indoor Charger type Wall mounting Plug type Type A (NEMA 1 - 15)

Safety Specs

Withstand voltage (Hi-Pot) 3000Vac ≤ 10mA (60s) Insulation resistance >100M Ω @500Vdc Safety standard UL1310 (E248494) Compliance FCC

LED Indicator Status

Green LED on No load or float charge
Red LED on Fast charge

FURTHER INFORMATION

Please refer to our website **www.power-sonic.com** for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.