


RG2A THRU RG2M

GLASS PASSIVATED FAST SWITCHING RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current - 2.0 Amperes

PATENTED *

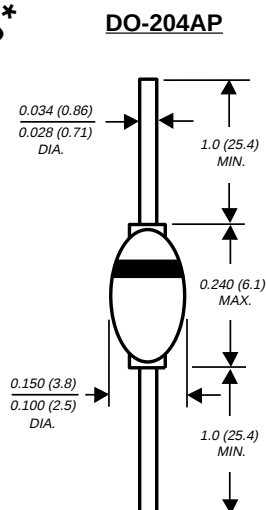

Dimensions in inches and (millimeters)

* Brazed-lead assembly is covered by Patent No. 3,930,306

FEATURES

- ♦ High temperature metallurgically bonded construction
- ♦ Hermetically sealed package
- ♦ Glass passivated cavity-free junction
- ♦ 1.0 Ampere operation at $T_A=55^\circ\text{C}$ with no thermal runaway
- ♦ Typical I_R less than $0.1\mu\text{A}$
- ♦ Capable of meeting environmental standards of MIL-STD-19500
- ♦ Fast switching for high efficiency
- ♦ High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds $0.375"$ (9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-204AP solid glass body

Terminals: Solder plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.02 ounce, 0.56 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	RG2A	RG2B	RG2D	RG2G	RG2J	RG2K	RG2M	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current $0.375"$ (9.5mm) lead lengths at $T_A=55^\circ\text{C}$	$I_{(AV)}$	2.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50.0							Amps
Maximum instantaneous forward voltage at 2.0A	V_F	1.3							Volts
Maximum full load reverse current, full cycle average $0.375"$ (9.5mm) lead length at $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	$I_{R(AV)}$	1.0 100.0							μA
Maximum DC reverse current at rated DC blocking voltage	I_R	5.0							μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	150				200	250	500	ns
Typical junction capacitance (NOTE 2)	C_J	15.0							pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	55.0							$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175							$^\circ\text{C}$

NOTES:

(1) Measured with $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 V_{DC}

(3) Thermal resistance from junction to ambient at $0.375"$ (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES RG2A AND RG2M

FIG. 1 - FORWARD CURRENT DERATING CURVE

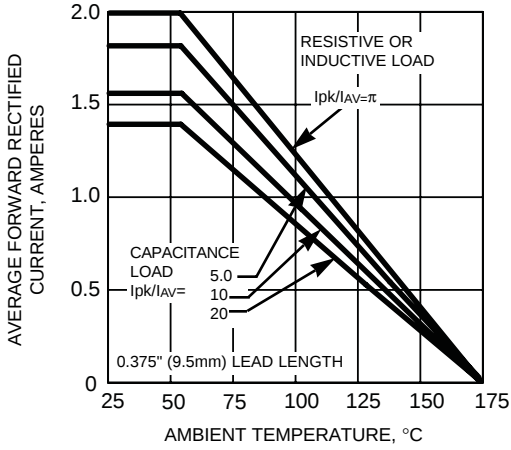


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

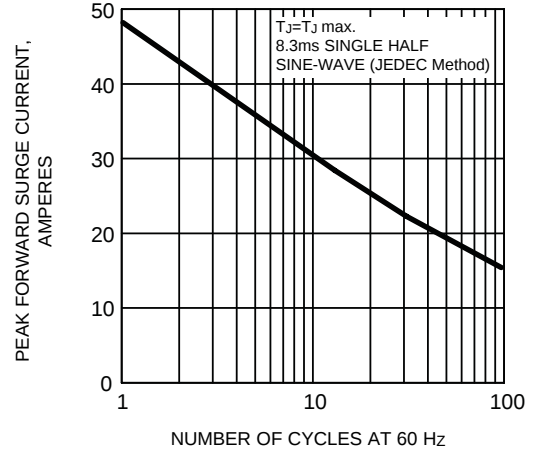


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

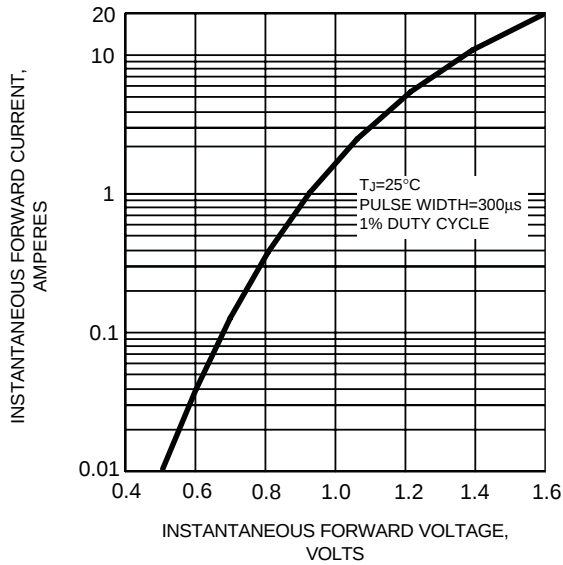


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

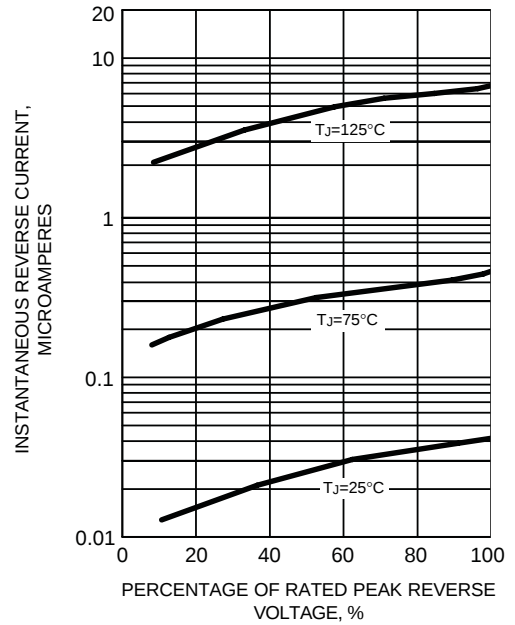


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

