


3-Row Right-Angle Receptacle Assemblies with Posted Contacts (Wrap-Type)



Housing Material — In accordance with MIL-C-55302




Contact Material and Finish — Beryllium copper per MIL-C-55302 plated .000050 [0.00127] gold over .000030 [0.00076] nickel on the entire contact

Related Product Data

Mates with — Pin Headers, page 6077

External Keying — page 6091

Recommended PC Board Layout — page 6087

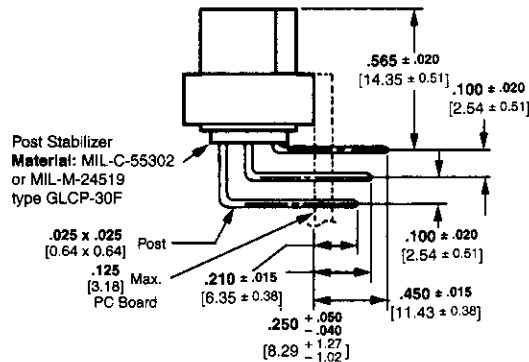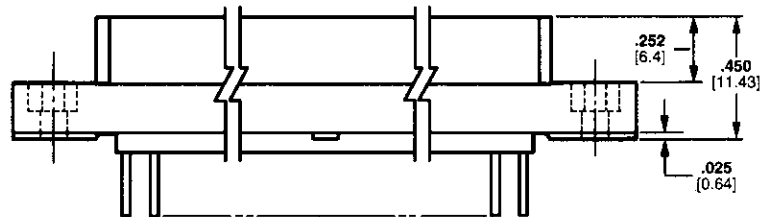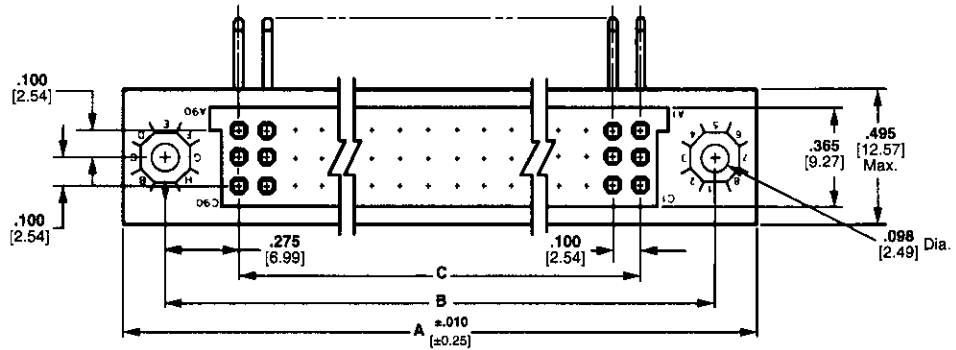

Right-Angle Wrap-Type Posts

No. of Pos.	Dimensions			AMP Part No.
	A	B	C	
270'	9.750 247.65	9.450 240.03	8.900 226.06	—
240'	8.750 222.25	8.450 214.63	7.900 200.66	—
210	7.750 196.85	7.450 189.23	6.900 175.26	447255-2
195	7.250 184.15	6.950 176.53	6.400 162.58	447255-3
180	6.750 171.45	6.450 163.83	5.900 149.86	447255-4
165'	6.250 158.75	5.950 151.13	5.400 137.16	—
150	5.750 146.05	5.450 138.43	4.900 124.46	447255-6
135'	5.250 133.35	4.950 125.73	4.400 111.76	—
126'	4.950 125.73	4.650 118.11	4.100 104.14	—
123'	4.850 123.19	4.550 115.57	4.000 101.6	—
120	4.750 120.65	4.450 113.03	3.900 86.36	447255-8
105	4.250 107.95	3.950 100.33	3.400 86.36	447255-9
90	3.750 95.25	3.450 87.63	2.900 73.66	1-447255-0

*Part numbers available upon request.