


PART NUMBER	AMPS	VOLTS	FUSE SUB-ASSEMBLY	CATALOG NUMBER	DESCRIPTION	UPC CODE	CE LOGO	CSA LOGO	I.R. REQ'D	UL LISTED 717H FUSE LOGO	RoHS LOGO	Pb-FREE LOGO
0375012.MXP	12	125	375012-P	375012P	FUSE 125V SB PT 3AG Pb-FREE 12A	079458 10026	YES	YES	10,000A 125V AC	YES	YES	YES
0375015.MXP	15	125	375015-P	375015P	FUSE 125V SB PT 3AG Pb-FREE 15A	079458 10028	YES	YES	10,000A 125V AC	YES	YES	YES

LTR	DATE	REVISION		CHK	APD
A	03/10/05	61695 - RELEASED	PJM		
B	12/01/05	84645B-CHG 32.39 TO 32.72	PJM		

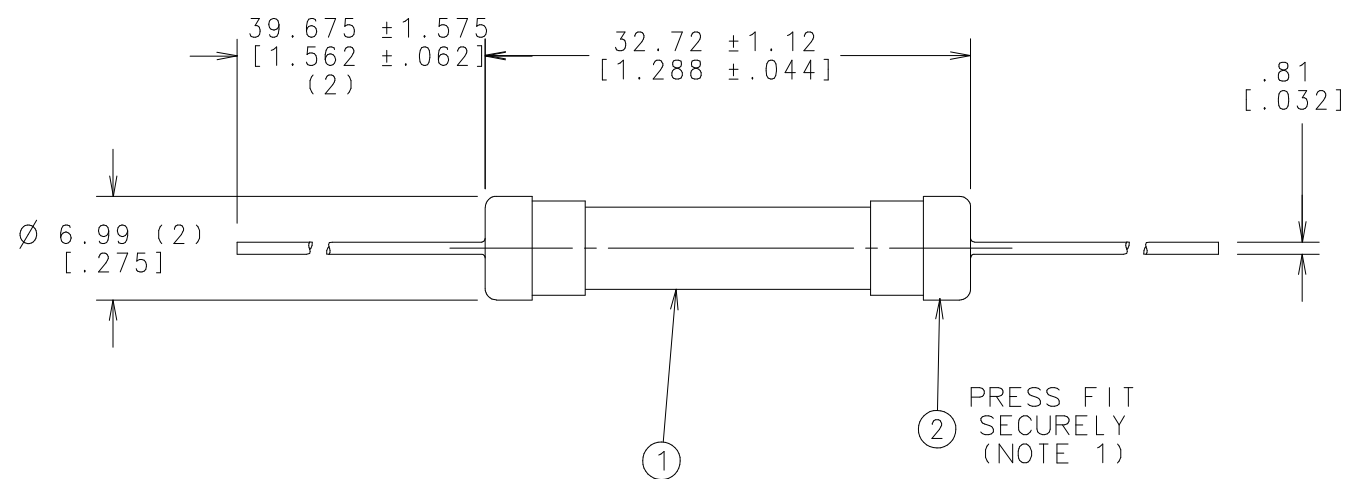

NOTES:

1. OUTER CAP & LEAD ASSEMBLY SHALL WITHSTAND A PULL TEST OF 10 POUNDS WITHOUT SEPARATING FROM FUSE CAP.
2. MEASURE VOLTAGE DROP AND COLD RESISTANCE PER ES-001038.
3. PACK 1000 FUSES IN BOX 580461 SEAL WITH 088120 TAPE AND LABEL.
4. LABEL TO BE APPLIED TO THE END OF THE BOX.

(1P)PART No 0375015.MXP
 株式会社リテール
 電子機器用
 RoHS
 (Q) QTY 1000 CATALOG/PREVIOUS No: 375015P
 (11) LOT NO TEST2AG
 0 79458 10028 0
 FUSE 125V SB PT 3AG Pb-FREE 15A 03/02/05
 MM/DD/YY
 LISTED 717H MINIATURE FUSE
 I.R. 10,000A 125V AC
 CE

NOTE: LABEL ILLUSTRATION(S) IS FOR REFERENCE ONLY. THE ACTUAL COPY AND REGULATORY MARKINGS WILL VARY BY THE INDIVIDUAL PART NUMBER. SEE CHART.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
3	580461	CARTON	1	EAD
2	934-054	CAP AND LEAD ASSEMBLY	2000	EA
1	SEE CHART	FUSE SUB-ASSEMBLY	1000	EA

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

- O DENOTES CRITICAL CHARACTERISTICS.
- CPK DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
- (ST) DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
- CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE. MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

COPIES TO		MATERIAL SPEC	
1	9 18	FINISH	
2	10 19		
3	12 20		
4	13 21	DRW	PJM DATE 03/10/05 SCALE 2:1
5	14 23		
6	15 33	CHK	DATE SUPER DR
7	16 43		
8	17 53	APPS	DATE FINISH GOOD WT GRAMS/PIECE
		TOLERANCE UNLESS OTHERWISE SPECIFIED	
		TWO PLACE DEC ± 0.25 [0.01]	FRACTION ±
		THREE PLACE DEC ± 0.001 [0.004]	ANGULAR ± 1°
		3RD ANGLE PROJECTION	TITLE

3AG SLO-BLO FUSE
 Pb-FREE 1000 PACK
 Littelfuse
 DES PLAINES, ILLINOIS 60016
 REVISION B
 DRAWG. NO. 0375000.MXP
 FINAL SERIES

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED