

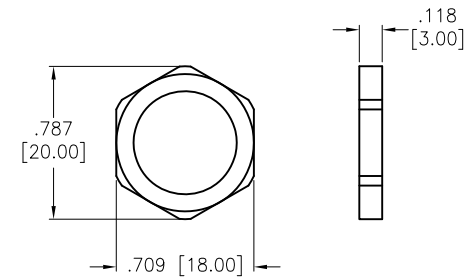
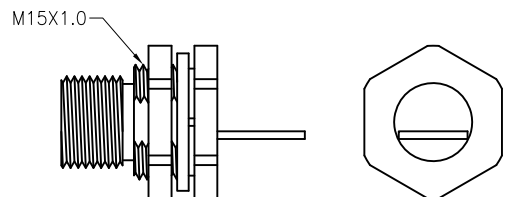


RECOMMENDED PANEL CUT



HEX NUT	NYLON+GF	BLACK
GASKET	EDPM	BLACK
HOUSING	NYLON+GF	BLACK
PCB	DOUBLE SIDE	
CONNECTOR	MINI USB B TYPE FEMALE CONNECTOR	BLACK
PART NAME	DESCRIPTION	COLOR

SPECIFICATIONS:  
 Electrical:  
 Current rating: 1 A max  
 Contact resistance: 50 mohms max  
 Insulation resistance: 100 Mohms min  
 Dielectric withstanding voltage: 100 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -20°C to +60°C  
 Environmental:  
 Lead free, RoHS compliant.

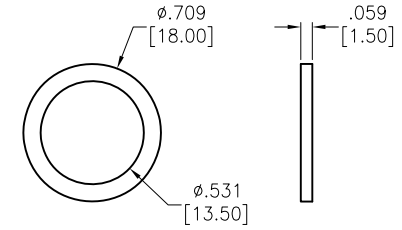

SD-NPBC-JTPC-GX0-000  
 7=IP67

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES			<b>ADAM TECH</b> 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
.X ± .10		∅.X ± .10		TITLE <b>WATERPROOF CONNECTOR, MINI USB B TYPE SOCKET,          C SIZE PLUG, SCREW TYPE, PANEL MOUNT</b>	
.XX ± .020		∅.XX ± .015			
.XXX ± .015		∅.XXX ± .010			
APPROVALS			DATE		
DRAWN	HR	6/24/16			
CHECKED	CK	6/24/16			
APPROVED					
SIZE	PART NO.	REV.			
X	SD-NPBC-JTPC-GX0-000	-			
REF:	S00200T	SCALE:	NTS	SHEET 1 OF 1	