


# AZ830

## POLARIZED DIP RELAY SINGLE SIDE STABLE

### FEATURES

- Low profile for compact board spacing
- DC coils to 48 VDC
- High sensitivity, 100 mW pickup
- Meets FCC Part 68.302 1500 V lightning surge
- Meets FCC Part 68.304 1000 V dielectric
- Life expectancy to 100 million operations
- High switching capacity, 60 W, 125 VA
- Fits standard 16 pin IC socket
- Epoxy sealed
- UL file E43203 (UL1950); CSA file LR 88413

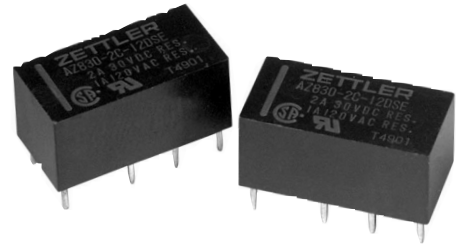

### CONTACTS

<b>Arrangement</b>	DPDT (2 Form C) Bifurcated crossbar contacts
<b>Ratings</b>	Resistive load: Max. switched power: 60 W or 125 VA Max. switched current: 2 A Max. switched voltage: 250 VDC or 300 VAC Max. carry current: 3A
<b>Rated Load UL</b>	2 A at 30 VDC 1 A at 120 VAC
<b>Material</b>	Silver alloy, gold clad. Silver palladium, gold clad available upon request (not recommended for current greater than 1 Amp).
<b>Resistance</b>	< 50 milliohms initially

### COIL

<b>Power</b>	
<b>At Pickup Voltage (typical)</b>	Standard coil: 200 mW Sensitive coil: 100 mW
<b>Max. Continuous Dissipation</b>	1.0 W at 20°C (68°F) 0.9 W at 40°C (104°F)
<b>Temperature Rise</b>	Standard: 38°C (68°F) at nominal coil voltage Sensitive: 21°C (38°F) at nominal coil voltage
<b>Temperature</b>	Max. 115°C (239°F)

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Relay has fixed coil polarity.
4. For complete isolation between the relay's magnetic fields, it is recommended that a .197" (5.0 mm) space be provided between adjacent relays.
5. Relay adjustment may be affected if undue pressure is exerted on relay case.
6. Specifications subject to change without notice.

### GENERAL DATA

<b>Life Expectancy</b> <b>Mechanical</b> <b>Electrical</b>	Minimum operations 1 x 10 <sup>8</sup> 1 x 10 <sup>5</sup> at 2 A, 30 VDC or 1 A, 125 VAC 2 x 10 <sup>6</sup> at 1 A, 30 VDC or .5 A, 125 VAC (see table for additional figures)
<b>Operate Time (typical)</b>	3 ms at nominal coil voltage
<b>Release Time (typical)</b>	2 ms at nominal coil voltage (with no coil suppression)
<b>Capacitance</b>	Contact to contact: 1.0 pF Contact set to contact: 1.0 pF Contact to coil: 2.0 pF
<b>Bounce (typical)</b>	At 10 mA contact current 1.5 ms at operate N.O. side 2.5 ms at operate N.C. side
<b>Dielectric Strength (at sea level)</b>	1500 Vrms contact to coil 1000 Vrms between contact sets 1000 Vrms across contacts Meets FCC Part 68.302 lightning surge Meets FCC Part 68.304 V dielectric
<b>Insulation Resistance</b>	1000 megohms min. at 20°C, 500 VDC, 50% RH
<b>Dropout</b>	Greater than 10% of nominal coil voltage
<b>Ambient Temperature</b> <b>Operating</b> <b>Storage</b>	At nominal coil voltage Standard: -40°C (-40°F) to 70°C (158°F) Sensitive: -40°C (-40°F) to 85°C (185°F) Both: -40°C (-40°F) to 105°C (221°F)
<b>Vibration</b>	0.062" (1.5 mm) DA at 10–55 Hz
<b>Shock</b>	40 g
<b>Enclosure</b>	P.B.T. polyester
<b>Terminals</b>	Tinned copper alloy, P.C.
<b>Max. Solder Temp.</b>	270°C (518°F)
<b>Max. Solder Time</b>	5 seconds
<b>Max. Solvent Temp.</b>	80°C (176°F)
<b>Max. Immersion Time</b>	30 seconds
<b>Weight</b>	5 grams

**ZETTLER electronics GmbH**

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0  
Fax +49 89 800 97 200

office@ZETTLERelectronics.com  
www.ZETTLERelectronics.com

# AZ830

## RELAY ORDERING DATA

STANDARD COIL				
COIL SPECIFICATIONS				ORDER NUMBER*
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance Ohm $\pm 10\%$	Must Operate VDC	
5	7.5	62.5	3.5	AZ830-2C-5DE
6	9.0	90	4.2	AZ830-2C-6DE
12	18.0	360	8.4	AZ830-2C-12DE
24	36.0	1,440	16.8	AZ830-2C-24DE
48	72.0	5,760	33.6	AZ830-2C-48DE
SENSITIVE RELAYS				
5	11.0	125	3.5	AZ830-2C-5DSE
6	13.0	180	4.2	AZ830-2C-6DSE
12	26.0	720	8.4	AZ830-2C-12DSE
24	53.0	2,880	16.8	AZ830-2C-24DSE
48	106.0	11,520	33.6	AZ830-2C-48DSE


\* Add suffix "A" for silver palladium gold clad contacts.

## TYPICAL CONTACT LIFE EXPECTANCY

VOLTAGE	POWER	NUMBER OF OPERATIONS	
		RESISTIVE LOAD	INDUCTIVE LOAD
50 mV	50 $\mu$ W	$5 \times 10^7$	$5 \times 10^7$
30 VDC	60 W	$5 \times 10^5$	$15 \times 10^4$
30 VDC	40 W	$1 \times 10^6$	$3 \times 10^5$
30 VDC	20 W	$3 \times 10^6$	$1 \times 10^6$
60 VDC	60 W	$5 \times 10^5$	—
60 VDC	40 W	$1 \times 10^6$	—
60 VDC	20 W	$3 \times 10^6$	—
30 VAC	120 VA	$5 \times 10^5$	$15 \times 10^4$
30 VAC	80 VA	$1 \times 10^6$	$3 \times 10^5$
30 VAC	40 VA	$3 \times 10^6$	$1 \times 10^6$
60 VAC	120 VA	$5 \times 10^5$	$15 \times 10^4$
60 VAC	80 VA	$1 \times 10^6$	$3 \times 10^5$
60 VAC	40 VA	$3 \times 10^6$	$1 \times 10^6$
125 VAC	125 VA	$5 \times 10^5$	$15 \times 10^4$
125 VAC	80 VA	$1 \times 10^6$	$3 \times 10^5$
125 VAC	40 VA	$3 \times 10^6$	$1 \times 10^6$


- NOTES: 1. Relays operated at nominal coil voltage.  
 2. Inductive load tests are at 0.7 power factor.  
 3. Table represents typical life figures and are not guaranteed minimums.

## MECHANICAL DATA

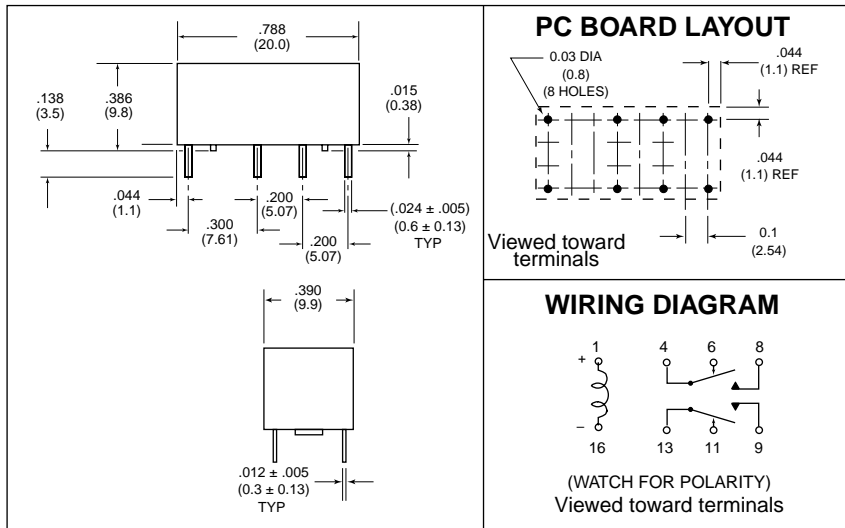


Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "

## Maximum Switching Capacity

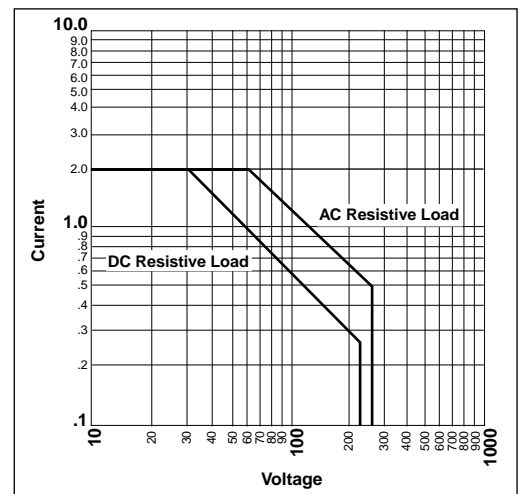

## Coil Temperature Rise

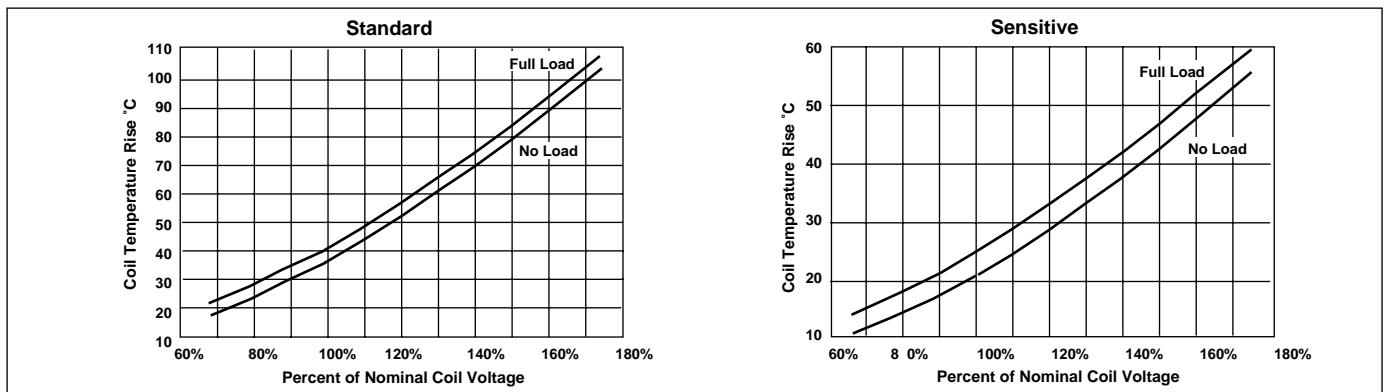

# ZETTLER electronics GmbH

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0

Fax +49 89 800 97 200

office@ZETTLERelectronics.com

www.ZETTLERelectronics.com